

# TOP200 + NEWS

Edition – Spring 2023



**ROLINE Outdoor S/FTP Patch Cord Cat.6A (Class EA), Stranded, LSOH / Page New.2**



**roline**<sup>®</sup>  
Designed for Professionals


**VALUE HDMI 8K (7680 x 4320) Ultra HD Cable + Ethernet, Flat / Page New.10**



**Value**<sup>®</sup>

**VALUE Gaming-/Office Clamp Mount Pegboard / Page New.29**

**Value**<sup>®</sup>

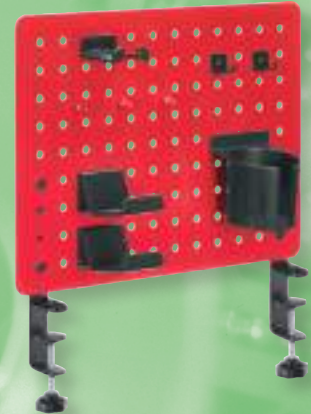

**ROLINE 8K HDMI Switch, 2-way / Page New.14**



**roline**<sup>®</sup>  
Designed for Professionals

**VALUE Cable USB4, with Emark, C-C, M/M, 240W / Page New.9**



**Value**<sup>®</sup>

**ROLINE PREMIUM Solid Articulating Wall Mount TV Holder, up to 203.2cm (37" - 80") / Page New.19**



**roline**<sup>®</sup>  
Designed for Professionals

## COMPUTER ACCESSORIES & NETWORK PRODUCTS





# NEWSSHOP – New Products

## VALUE Outdoor S/FTP Patch Cord Cat.6A / Class EA, Solid, TPE, LSOH

Cat.6A

S/FTP

Patch cable for networking connections between devices in combination with outdoor application (e.g. connection to outdoor surveillance cameras)

- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends
  - Durable due to moulded kink protection
  - Suitable for PoE applications and multimedia applications where the extension is working over TP
  - High quality plugs with gold plated contacts
  - LSZH- halogen free, flame retardant and low smoke
  - UV- resistant (Ultraviolet resistance - ability of the material to withstand the degradation that can be caused by exposure to ultraviolet light)
  - Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair solid copper wire, complete braid shielding, pairs shielded with aluminium clad polyester foil

**REMARK: NOT suitable for underground installation / application**



Halogenfree  
Flame retardant  
Low Smoke

Order-No. – P.U.

VALUE Outdoor S/FTP Patch Cord Cat.6A / Class EA, solid, LSOH, TPE, black, 20 m	21.99.0720	– 5
VALUE Outdoor S/FTP Patch Cord Cat.6A / Class EA, solid, LSOH, TPE, black, 30 m	21.99.0721	– 5
VALUE Outdoor S/FTP Patch Cord Cat.6A / Class EA, solid, LSOH, TPE, black, 50 m	21.99.0722	– 2

Value®

Available August 2023

## ROLINE Outdoor S/FTP Patch Cord Cat.6A / Class EA, Stranded, TPE, LSOH

Cat.6A

S/FTP

Patch cable for networking connections between devices in combination with outdoor application (e.g. connection to outdoor surveillance cameras)

- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends
  - Durable due to moulded kink protection
  - Suitable for PoE applications and multimedia applications where the extension is working over TP
  - High quality plugs with gold plated contacts
  - UV- resistant (Ultraviolet resistance - ability of the material to withstand the degradation that can be caused by exposure to ultraviolet light)
  - Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium clad polyester foil

**REMARK: NOT suitable for underground installation / application**



Halogenfree  
Flame retardant  
Low Smoke

Order-No. – P.U.

ROLINE Outdoor S/FTP Patch Cord Cat.6A / Cl. EA, stranded, LSOH, TPE, black, 0.5 m	21.15.0750	– 100
ROLINE Outdoor S/FTP Patch Cord Cat.6A / Cl. EA, stranded, LSOH, TPE, black, 1 m	21.15.0751	– 100
ROLINE Outdoor S/FTP Patch Cord Cat.6A / Cl. EA, stranded, LSOH, TPE, black, 2 m	21.15.0752	– 100
ROLINE Outdoor S/FTP Patch Cord Cat.6A / Cl. EA, stranded, LSOH, TPE, black, 3 m	21.15.0753	– 50
ROLINE Outdoor S/FTP Patch Cord Cat.6A / Cl. EA, stranded, LSOH, TPE, black, 5 m	21.15.0755	– 50
ROLINE Outdoor S/FTP Patch Cord Cat.6A / Cl. EA, stranded, LSOH, TPE, black, 7 m	21.15.0757	– 40
ROLINE Outdoor S/FTP Patch Cord Cat.6A / Cl. EA, stranded, LSOH, TPE, black, 10 m	21.15.0759	– 40

roline®  
Designed for Professionals

Available August 2023



## VALUE S/FTP Cable Cat.8 (Class I), Solid Wire, LSOH, Dca

Category 8, the standard for next-generation twisted-pair cabling, enables up to four times faster data transfer on the same cabling type and supports 25GBASE-T and 40GBASE-T short distance applications. Our Cat. 8 cables are halogen-free and flame-retardant (LSOH).

- 100 meter / box
- Impedance: 100 Ohm
- Construction:
  - 8 lines, solid copper wire, AWG22
  - pairs shielded with aluminium foil
  - complete shielding in tinned copper braid
- Colour: grey
- CPR (Dca-S1a,d0,a1)

For a Cat.8 channel link S/FTP Cabling we recommend to use the following components:

- 21.99.1800 VALUE S/FTP Cable, Cat.8, Solid Wire, AWG22
- 21.99.1807 VALUE Cat.8 RJ45 Keystone, Jack, toolless
- 21.99.1804 VALUE Cat.8 Shielded Field Connector RJ45 plug
- 21.99.1801 to 21.99.1803 VALUE S/FTP Patch Cable Stranded Cat.8, grey (1m to 3m)



Halogenfree  
Flame retardant  
Low Smoke

Order-No. – P.U.


VALUE S/FTP Cable Cat.8 (Class I), Solid Wire, LSOH, 100 m	21.99.1800	– 1
--	------------	-----

## VALUE S/FTP Patch Cord Cat.8 (Class I), Stranded, LSOH

- Prepared double shielded Twisted Pair cable with screened RJ45 connector on both ends
- Suitable for PoE applications and multimedia applications where the extension is working over TP
- Suitable for 10 GBit to IEEE 802.3an and for Power over Ethernet
- Suitable for 25/40 GBit to IEEE 802.3bq applications (4-pair balanced twisted-pair cabling with 2 connectors over distances up to 30m)
- High quality plugs with gold plated contacts
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium clad polyester foil

Order-No. – P.U.

VALUE S/FTP Patch Cord Cat.8 (Class I), stranded, LSOH, grey, 1 m	21.99.1801	– 100
VALUE S/FTP Patch Cord Cat.8 (Class I), stranded, LSOH, grey, 2 m	21.99.1802	– 100
VALUE S/FTP Patch Cord Cat.8 (Class I), stranded, LSOH, grey, 3 m	21.99.1803	– 50

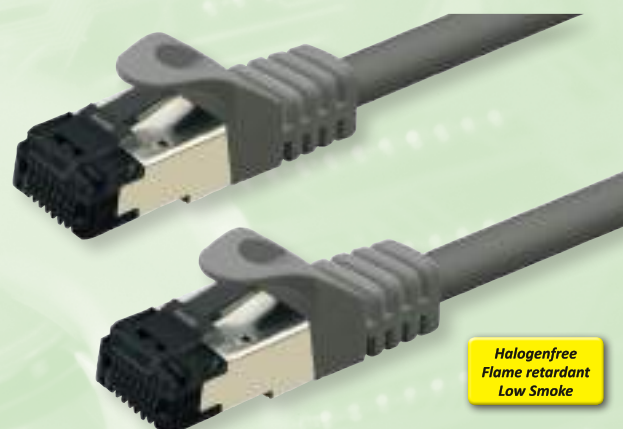

Halogenfree  
Flame retardant  
Low Smoke

## VALUE Cat.8 (Class I) Field Connector Plug RJ45

- Full shielded with zinc alloy housing
- T568A & T568B wiring
- Cat. 8 channel performance verified
- Cable wire gauge : 22AWG (0.65mm) to 26AWG (0.4mm) (solid / stranded)
- Cable outer diameter: 5.0 to 8.5mm
- Suitable for the PoE plus (IEEE 802.3at) applications
- Easy, quick and reliable installation, no special tool required
- The ring ensures 360° forwarding of the shielding of the cable to the shielding of the plug

Order-No. – P.U.

VALUE Cat.8 (Class I) Field Connector Plug RJ45	21.99.1804	– 50
---	------------	------



Tool-free

## VALUE Keystone Jack, Cat.8 (Class I), RJ-45, STP, tool-free

Cat.8 Keystones are ideal for use in 10 Gigabit Ethernet networks

- Cat.8 Keystones are ideal for use in Gigabit Ethernet networks
- Support data transfer rates up to 10/25/40 Gbit/s with a bandwidth of 2000 MHz
- Connect the cable to the Keystones via LSA connections without special tools- place the cable ends simply into the guides (with color coding), close and compress the module- the connection is ready for use
- Cable entrance diameter range: 6mm- 8.5mm
- Cable wire gauge: 22AWG (0.65mm) to 26AWG (0.4mm) (solid / stranded)
- Wire coded scheme: EIA/TIA 568

Order-No. – P.U.

VALUE Keystone Jack, Cat.8 (Class I), RJ-45, STP, tool-free, silver	21.99.1807	– 50
---	------------	------



Tool-free

Value

Available August 2023






# NEWSSHOP – New Products

## ROLINE Cat.6 (Class E) Modular Plug, STP, Short Body + Kink Protection Hood

- Cat.6 modular plugs, 8P8C
- Shielded, gold plated contacts
- For solid wire / stranded round cables with OD max. 7.0mm
- For cables with the insulation OD from 0.94-1.1mm
- With insert
- Package unit: 10 connectors
- Kink protection hood is suitable for cables with max. OD (outer diameter): 7.0mm

• **REMARK:**  
Kink protection hood (21.99.3096)  
only suitable in combination with 21.17.3095



	Order-No.	–	P.U.
ROLINE Cat.6 (Class E) Modular Plug, STP, short body, 10 pcs.	21.17.3095	–	50
ROLINE Kink Protection Hood for RJ45, for 21.17.3095, 10 pcs., grey	21.17.3096	–	50


**roline**<sup>®</sup>  
Designed for Professionals

Available August 2023

## VALUE Keystone Jack, Cat.6A / Class EA, RJ-45, STP, Tool-Free, SLIM

Keystone in Cat.6A quality for use in 10 Gigabit Ethernet networks with a bandwidth of 500 MHz - now in a particularly slim design

- The cables are connected to the keystones without tools - the cable cores are simply inserted into the guides; the module is closed and compressed - the connection is ready
- Keystones with printed colour coding according to EIA / TIA 568
- The Keystone modules can be latched into a 19" module carrier (26.11.0360 / 26.11.0359 or 26.99.0331 / 26.99.0332) with earthing connection. Or they become a junction box together with a module holder 25.16.8579
- The VALUE Cat.6A/Class EA 19" keystones meet the transmission requirements of a Cat.6A/Class EA Link
- The particularly slim design offers you considerable advantages in high-density network environments
- Material: Zinc alloy
- Cable entrance diameter range: 5mm - 8mm
- Cable wire gauge : 22AWG (0.65mm) to 26AWG (0.4mm) (solid / stranded)



	Order-No.	–	P.U.
VALUE Keystone Jack, Cat.6A / Class EA, RJ-45, STP, tool-free, SLIM	26.99.0376	–	10

**Value**<sup>®</sup>

Available August 2023

## VALUE RJ45 Modular Coupler, Cat.6A / Class EA, STP, Outdoor/Industrial

CAT. 6A coupler for easily connecting or extending patch cables in industrial environments to protect the connection from dust or moisture

- The coupler is able to extend Cat.6A cables
- Dustproof cable gland for industrial applications
- Offers protection for the connection against moisture and soiling
- Quick and easy installation
- 2x shielded RJ45 ports
- Suitable for cable diameters up to 4.5 - 7.5 mm
- For waterproofing we recommend patchcords with a 6mm - 7mm O.D.
- Dimensions: length 121.5 mm
- Diameter: 28mm
- 8 contacts, 1:1 connected



	Order-No.	–	P.U.
VALUE RJ45 Modular Coupler, Cat.6A / Class EA, STP, Outdoor/Industrial, black	21.99.3000	–	10

**Value**<sup>®</sup>



Available August 2023



## ROLINE Keystone 19" Module Frame Cat.5/6/6A, 16 Ports, STP, w. Cable Management

- 19" Patch panel module frame for shielded Cat.5 / Cat.6 / Cat. 6A RJ-45 keystone jacks
- 16 ports
- Color: Black

• Remark: Keystone are not included. Please order them separately.

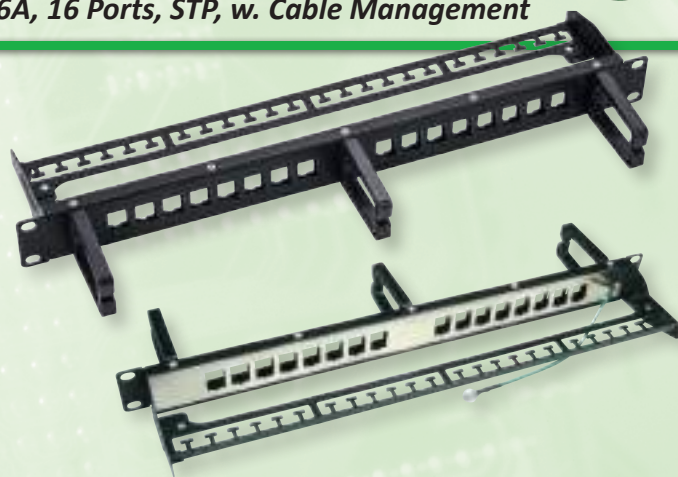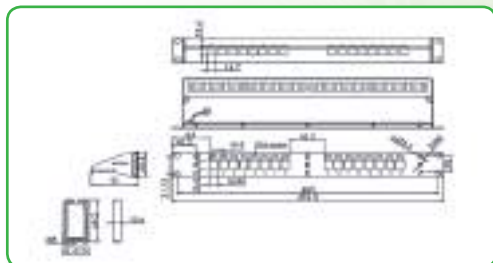

**roline**  
Designed for Professionals

Available July 2023

Order-No. – P.U.


ROLINE Keystone 19" Module Frame Cat.5/6/6A, 16 Ports, STP

26.11.0363 – 10

## VALUE 19"-Fixed Shelf, 1UH / 2UH, Various Depths

- 19" fixed shelf with maximum load capacity of 10 / 25 kg
- 1,2 mm sheet steel
- 1UH / 2UH version
- Shelf depth: 150, 250, 350 and 400 mm
- Bracket support only for 26.99.0402/0403/0406/0407
- Min/Max. installation depth:


- REMARK: Increased load capacity when using angle brackets (requires rear 19" plane)
- Contents: shelf, mounting material (screw / cage nut / black washer)

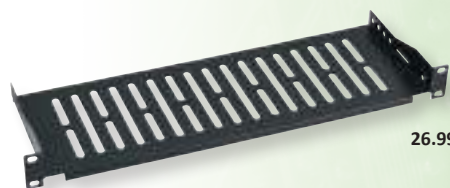

26.99.0400



26.99.0401

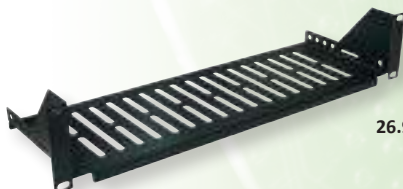


26.99.0404




26.99.0405

### Installation Depth


Item Number	Min.[mm]	Max.[mm]
<b>1UH</b>		
26.99.0400	150	150
26.99.0401	250	250
26.99.0402	360	460
26.99.0403	410	525

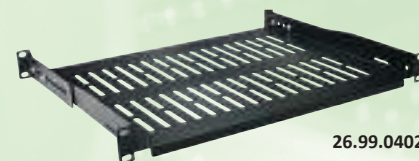


26.99.0402

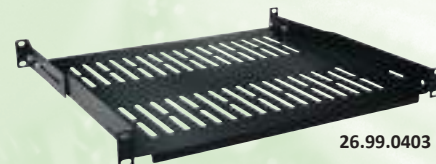

26.99.0403

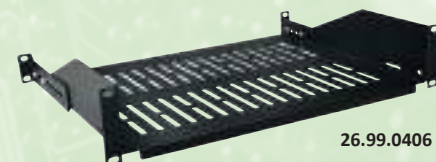

26.99.0406

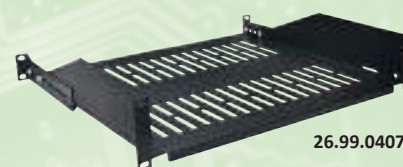

26.99.0407

### Installation Depth

Item Number	Min.[mm]	Max.[mm]
<b>2UH</b>		
26.99.0404	150	150
26.99.0405	250	250
26.99.0406	360	460
26.99.0407	410	525

Order-No. – P.U.

VALUE 19"-Fixed Shelf, 485 x 150mm, 1UH, max. 10 kg, black

26.99.0400 – 5

VALUE 19"-Fixed Shelf, 485 x 250mm, 1UH, max. 10kg, black

26.99.0401 – 5

VALUE 19"-Fixed Shelf, 485 x 350mm, 1UH, max. 25kg, black

26.99.0402 – 5

VALUE 19"-Fixed Shelf, 485 x 400mm, 1UH, max. 25kg, black

26.99.0403 – 5

VALUE 19"-Fixed Shelf, 485 x 150mm, 2UH, max. 10 kg, black

26.99.0404 – 5

VALUE 19"-Fixed Shelf, 485 x 250mm, 2UH, max. 10kg, black

26.99.0405 – 5

VALUE 19"-Fixed Shelf, 485 x 350mm, 2UH, max. 25kg, black

26.99.0406 – 5

VALUE 19"-Fixed Shelf, 485 x 400mm, 2UH, max. 25kg, black

26.99.0407 – 5

**Value**

Available August 2023





# NEWSSHOP – New Products

## VALUE 19" Vertical Wall Mount Bracket/Under Desk Mount, 1/2/3/4UH, max. 10kg



- 19" device carrier with low load capacity, max. 10kg
- Suitable for wall mount / under desk mount
- 4 Versions available: 1 / 2 / 3 / 4UH
- Material: 1.5 mm sheet steel
- Contents: bracket, mounting material



26.99.0410





26.99.0411

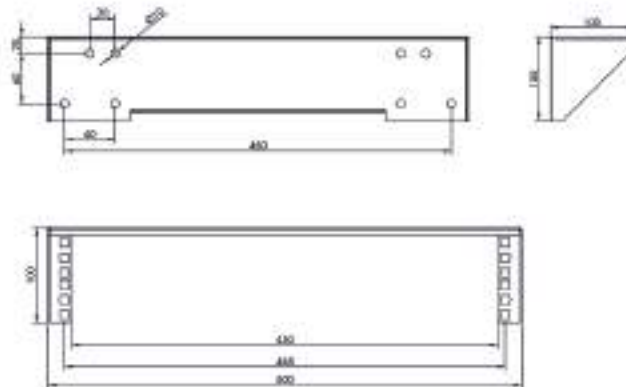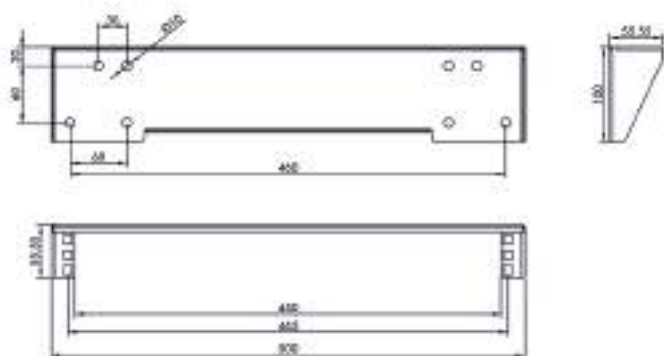

26.99.0412



26.99.0413

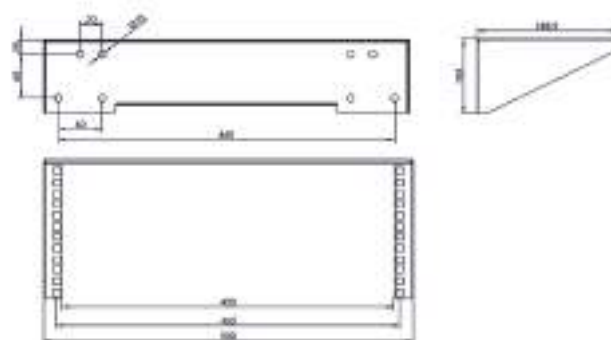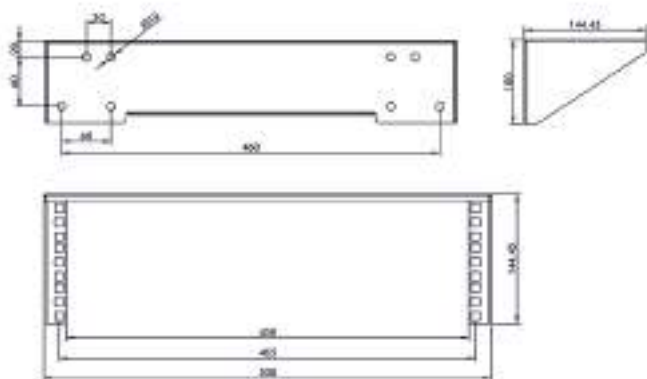

### Order-No. – P.U.

VALUE 19" Vertical Wall Mount Bracket/Under Desk Mount max. 10kg, 1UH	26.99.0410	– 5
VALUE 19" Vertical Wall Mount Bracket/Under Desk Mount max. 10kg, 2UH	26.99.0411	– 5
VALUE 19" Vertical Wall Mount Bracket/Under Desk Mount max. 10kg, 3UH	26.99.0412	– 4
VALUE 19" Vertical Wall Mount Bracket/Under Desk Mount max. 10kg, 4UH	26.99.0413	– 2



Available August 2023



## ROLINE USB 3.2 Gen 1 Hub, 4 Ports (4x USB A), Type C Connection Cable

**4-Port USB 3.2 Gen 1 Slim Hub made of dark grey aluminium with USB Type C connection cable - for connecting up to four peripheral or storage devices to a tablet (like an Apple iPad Pro), Ultrabook, Notebook/Laptop or PC via USB Type C.**

- 4-port USB 3.2 Gen 1 Type A hub with data rates of up to 5Gbit/s
- Suitable for Tablets, Macs/MacBooks, Ultrabooks, Notebooks/Laptops or PCs via USB Type C
- Suitable for peripherals such as keyboard, mouse and printer or for mass storage devices such as USB sticks and external hard drives
- Slim Hub with extremely small and slim housing
- Dark grey aluminium housing
- Power supply via USB Type C

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

- Contents: Hub



**roline®**  
Designed for Professionals

Available June 2023

	Order-No.	–	P.U.
ROLINE USB 3.2 Gen 1 Hub, 4 Ports, Type C Connection Cable	14.02.5053	–	10

## VALUE USB 3.2 Gen1 Hub, 4 Ports (2x A + 2x C), with Extension Cable, 5m / 10m


**The handy hub with up to 5m/10m long USB connection cable allows the connection of up to four USB peripherals at a greater distance from the PC. This makes the user almost independent of the location of the devices to be connected (e.g. printer).**

This hub with an active repeater cable extends the distance between the hub and the computer up to 5m/10 m.

- 4x USB ports
  - 2x port USB3.2Gen1 type A Female 5Gbps
  - 2x port USB3.2Gen1 type C Female 5Gbps
- Full compliance with USB 2.0 / 1.1 specification
- Plug & play. no additional drivers required
- USB Bus powered
- Cable length: 5m/10 m
- Housing dimensions: 81 x 40 x 17 mm
- Connectors:
  - 1x USB Type A Male and 2x USB Type A + 2x USB Type C Female
- Supports Windows XP / 7 / 8 / 10

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

- Contents: Cable, USB power cable

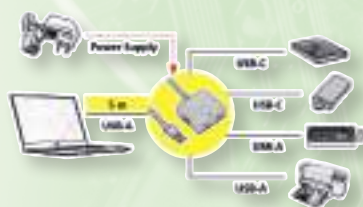

**Value®**

Available July 2023

	Order-No.	–	P.U.
VALUE USB 3.2 Gen1 Hub, 4 Ports (2x A + 2x C), with Extension Cable, black, 5 m	12.99.1124	–	10
VALUE USB 3.2 Gen1 Hub, 4 Ports (2x A + 2x C), with Extension Cable, black, 10 m	12.99.1125	–	10





# NEWSSHOP – New Products


## ROLINE USB 3.2 Gen 1 Extension Cable, 1 Port, AOC, M/F

Active optical USB 3.0 / USB 3.2 Gen 1 extension cable - with data transfer rates of up to 5Gbit/s at up to 20m distance!

- Active USB extension over up to 20 meters
- Small cable cross section thanks to glass fibre
- Solid metal connector housing
- The extension behaves like a USB hub
- Automatic determination of the optimum transmission rate- the cable supports data rates of up to 5 Gbps
- Optional power supply of the AOC cable via the included USB cable (USB type A to Micro B)

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

- Contents: AOC USB cable, USB cable for power supply

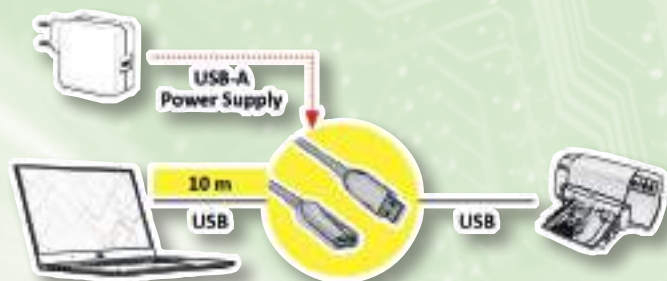

Order-No. – P.U.

ROLINE USB 3.2 Gen 1 Extension Cable, 1 Port, AOC, M/F, 10 m	12.04.1075	– 5
ROLINE USB 3.2 Gen 1 Extension Cable, 1 Port, AOC, M/F, 15 m	12.04.1076	– 5
ROLINE USB 3.2 Gen 1 Extension Cable, 1 Port, AOC, M/F, 20 m	12.04.1077	– 5

**roline**<sup>®</sup>  
Designed for Professionals

Available August 2023



## ROLINE USB 2.0 Cable Type C, C-B

- For connecting a PC/notebook equipped with USB Type C port to a peripheral device with a USB 2.0 Type B port (e.g. printer/scanner or an external hard disk HDD)
- Supports Hi-Speed USB 2.0 data transfer rate up to 480 Mbit/s
- Fully shielded cable with durable, flexible jacket
- Connectors: 1x USB type C male, 1x USB B male
- Length: 1.8m / 3m / 4.5m

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).



Order-No. – P.U.

ROLINE USB 2.0 Cable Type C, C-B, M/M, black, 1.8 m	11.02.8336	– 20
ROLINE USB 2.0 Cable Type C, C-B, M/M, black, 3 m	11.02.8337	– 10
ROLINE USB 2.0 Cable Type C, C-B, M/M, black, 4.5 m	11.02.8338	– 10

**roline**<sup>®</sup>  
Designed for Professionals

Available August 2023





## VALUE Cable USB4, with Emark, C-C, 240W

20Gbit/s

40Gbit/s

240W  
48V / 5A

High quality USB4 cable with the reversible USB-C connector on both ends for data transfer rates of up to 40 Gbit/s and USB Power Delivery up to 48V / 5A (240 W).

- High quality USB4 cable with improved shielding
- With the reversible Type C connectors at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Suitable for data transfer rates of up to 40 Gbit/s
- Supports USB Power Delivery to 48V / 5A

The major benefits of USB4 includes faster transfer speeds (up to 40 Gbit/s), a better management of video bandwidth (using a process called „protocol tunneling“ that sends DisplayPort, PCIe and USB packets at the same time while allocating bandwidth accordingly) and optional compatibility with Thunderbolt 3 products.



Order-No. – P.U.

VALUE Cable USB4 Gen3x2, **40Gbit/s**, with Emark, C-C, M/M, 240W, black, 1 m 11.99.9086 – 10

VALUE Cable USB4 Gen2x2, **20Gbit/s**, with Emark, C-C, M/M, 240W, black, 2 m 11.99.9087 – 10

Value®

Available August 2023

## ROLINE USB 3.2 Gen 1 Extension Cable, C-C, M/F, Only Data

5 Gbit/s

USB 3.2 Gen 1 extension cable - with data transfer rates of up to 5Gbit/s at up to 5m distance!

- USB extension over 5 meters
- Automatic determination of the optimum transmission rate- the cable supports data rates of up to 5 Gbps

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

- Contents: USB cable



Order-No. – P.U.

ROLINE USB 3.2 Gen 1 Extension Cable, C-C, M/F, only data, 5 m

12.04.1105 – 5

roline®  
Designed for Professionals

Available March 2023





# NEWSSHOP – New Products

## VALUE Ultra HD HDMI + Ethernet Cable, 8K(7680 x 4320), Flat

**8K****4320p**

High quality Flat HDMI cable with HDMI connectors for optimal transmission of digital UHD signals at very high data rates. For transfer of films in digital cinema quality with up to 8K at 60Hz.

- HDMI Ethernet Channel- Adds high-speed networking to an HDMI link, allowing users to take full advantage of their IP-enabled devices without a separate ethernet cable
- Audio Return Channel- Allows an HDMI-connected TV with a built-in tuner to send audio data „upstream“ to a surround audio system, eliminating the need for a separate audio cable
- 3D- Defines input/output protocols for major 3D video formats
- 8K support- Enables video resolutions up to 8K (7680x4320) far beyond 1080p, supporting next-generation displays
- **Flat design**
  - Cable with HDMI male connector on both sides
  - High quality cable with golden metal connector housing and shell for better shielding
  - Gold plated contacts for higher durability

**Order-No. – P.U.**

VALUE Ultra HD HDMI + Ethernet Cable, 8K(7680 x 4320), Flat, M/M, black, 1 m	11.99.5906	– 20
VALUE Ultra HD HDMI + Ethernet Cable, 8K(7680 x 4320), Flat, M/M, black, 2 m	11.99.5907	– 10
VALUE Ultra HD HDMI + Ethernet Cable, 8K(7680 x 4320), Flat, M/M, black, 3 m	11.99.5908	– 10



Available August 2023

## VALUE DisplayPort Cable, v1.4, 8K (7680 x 4320), DP-DP, Flat

**8K****4320p**

VALUE Flat DisplayPort Cable with DP connection on both sides for connecting an Ultrabook, Notebook/Laptop or PC to a monitor, TV or projector - for screen transmissions in excellent quality with resolutions of up to 7680x4320 @60Hz!

- DisplayPort is a universal connection standard for the transmission of picture and sound signals, widely known and appreciated in computer, industry and modern house wiring. Applications include mainly the connection of monitors or projectors to computers, notebooks/laptops, ultrabooks, NUCs and similar devices.
- The connector requires less space than VGA or DVI and is therefore more suitable for portable devices for two connectors on a graphics card (on one slot plate).
- DisplayPort v1.4 supports Display Stream Compression 1.2a (DSC), Forward Error Correction and the HDR10 standard.
- DP v1.4 can reach a maximum resolution of 8K (7680x4320) @60Hz or 4K (3840x2160) @120Hz
- **Flat design**
  - The practical plug design prevents the cable from slipping out of the DisplayPort socket and guarantees a stable audio and video transmission.
  - Compliant with DP v1.4 (max. 7680 x 4320 @60Hz)

**Order-No. – P.U.**

VALUE DisplayPort Cable, v1.4, DP-DP, Flat, M/M, black, 1 m	11.99.5861	– 20
VALUE DisplayPort Cable, v1.4, DP-DP, Flat, M/M, black, 2 m	11.99.5862	– 10
VALUE DisplayPort Cable, v1.4, DP-DP, Flat, M/M, black, 3 m	11.99.5863	– 10
VALUE DisplayPort Cable, v1.4, DP-DP, Flat, M/M, black, 5 m	11.99.5864	– 10



Available August 2023



## VALUE Ultra HD HDMI + Etherent Cable, 8K(7680 x 4320)

8K

4320p

High quality HDMI cable with HDMI connectors for optimal transmission of digital UHD signals at very high data rates. For transfer of films in digital cinema quality with up to 8K at 60Hz.

- HDMI Ethernet Channel- Adds high-speed networking to an HDMI link, allowing users to take full advantage of their IP-enabled devices without a separate ethernet cable
- Audio Return Channel- Allows an HDMI-connected TV with a built-in tuner to send audio data „upstream“ to a surround audio system, eliminating the need for a separate audio cable
- 3D- Defines input/output protocols for major 3D video formats
- 8K support- Enables video resolutions up to 8K (7680x4320) @60Hz far beyond 1080p, supporting next-generation displays
- Cable with HDMI male connector on both sides
- High quality cable with golden metal connector housing and shell for better shielding
- Gold plated contacts for higher durability



Order-No. – P.U.

VALUE Ultra HD HDMI + Etherent Cable, 8K(7680 x 4320), M/M, black, 0.5 m	11.99.5900	– 10
VALUE Ultra HD HDMI + Etherent Cable, 8K(7680 x 4320), M/M, black, 5 m	11.99.5904	– 10
VALUE Ultra HD HDMI + Etherent Cable, 8K(7680 x 4320), M/M, black, 10 m	11.99.5905	– 10

value®

Available June 2023

## VALUE Mini Gender Changer, 9-pin / 25-pin

### VALUE Mini Gender Changer

- Connection between two similar connectors
- Low leverage on the computer connector due to compact construction (17 mm long)
- All lines are connected 1:1
- Incl. locking screws



Order-No. – P.U.

VALUE Mini Gender Changer, 9-pin M / M	12.99.2025	– 50
VALUE Mini Gender Changer, 9-pin F / F	12.99.2030	– 50
VALUE Mini Gender Changer, 25-pin M / M	12.99.2005	– 50
VALUE Mini Gender Changer, 25-pin F / F	12.99.2010	– 50

value®

On stock





# NEWSSHOP – New Products

## ROLINE GREEN USB3.2 Gen 2x2

20Gbit/s

100W  
20V / 5A

USB 3.2 Gen 2x2 cable with up to 20 Gbit/s speed mode that uses a more efficient data encoding and will deliver more than twice the effective data through-put performance of existing, fully backward compatible USB connectors and cables.

- High quality USB 3.1 / USB 3.2 Gen 2x2 cable with improved shielding
- With the reversible Type C connectors at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Suitable for data transfer rates of up to 20 Gbit/s
- Supports USB Power Delivery to 20V / 5A

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

	Order-No.	– P.U.
ROLINE USB 3.2 Gen 2x2 Cable, PD (Power Delivery) 20V5A, w. Emark, C-C, M/M, 20 Gbit/s, 0.5 m	11.44.9070	– 10
ROLINE USB 3.2 Gen 2x2 Cable, PD (Power Delivery) 20V5A, w. Emark, C-C, M/M, 20 Gbit/s, 1 m	11.44.9071	– 10
ROLINE USB 3.2 Gen 2x2 Cable, PD (Power Delivery) 20V5A, w. Emark, C-C, M/M, 20 Gbit/s, 1.5 m	11.44.9072	– 10
ROLINE USB 3.2 Gen 2x2 Cable, PD (Power Delivery) 20V5A, w. Emark, C-C, M/M, 20 Gbit/s, 2 m	11.44.9073	– 10

**roline**  
green



Halogenfree  
Flame retardant  
Low Smoke

## ROLINE GREEN Power Cable, straight IEC Connector, LSOH

Cable with safety plug 90° angulate (Schuko plug) and IEC 320-C13

- Plugs: 3 Pole German Type plug to C13 plug
- Nominal data: 250V AC/10A
- Colour: black / white

	Order-No.	– P.U.
ROLINE GREEN Power Cable, straight IEC Connector, black, 0.8 m	19.44.1000	– 50
ROLINE GREEN Power Cable, straight IEC Connector, black, 1.8 m	19.44.1001	– 50
ROLINE GREEN Power Cable, straight IEC Connector, black, 3 m	19.44.1002	– 50
ROLINE GREEN Power Cable, straight IEC Connector, white, 0.8 m	19.44.1005	– 50
ROLINE GREEN Power Cable, straight IEC Connector, white, 1.8 m	19.44.1006	– 50
ROLINE GREEN Power Cable, straight IEC Connector, white, 3 m	19.44.1007	– 50

**roline**  
green

Halogenfree  
Flame retardant  
Low Smoke

Available August 2023

## ROLINE GREEN Monitor Power Cable, IEC 320 C14 - C13, LSOH

- Monitor power cable with moulded plugs
- Connectors: IEC 320-C14 plug to IEC 320-C13 plug
- Nominal data: 250V AC/10A
- Colour: black / white

	Order-No.	– P.U.
ROLINE GREEN Monitor Power Cable, IEC 320 C14 - C13, black, 0.8 m	19.44.1010	– 50
ROLINE GREEN Monitor Power Cable, IEC 320 C14 - C13, black, 1.8 m	19.44.1011	– 50
ROLINE GREEN Monitor Power Cable, IEC 320 C14 - C13, black, 3 m	19.44.1012	– 50
ROLINE GREEN Monitor Power Cable, IEC 320 C14 - C13, white, 0.8 m	19.44.1015	– 50
ROLINE GREEN Monitor Power Cable, IEC 320 C14 - C13, white, 1.8 m	19.44.1016	– 50
ROLINE GREEN Monitor Power Cable, IEC 320 C14 - C13, white, 3 m	19.44.1017	– 50

**roline**  
green

Halogenfree  
Flame retardant  
Low Smoke

Available August 2023




## VALUE DisplayPort v1.4 Cable (AOC)

8K 4320p

With our UHD (7680x4320 @60Hz) capable DisplayPort fiber optic cable you have the possibility to connect up to 50m between your devices. The active cable (AOC) does not require a separate power supply and is particularly suitable for installation in the cable duct due to its small diameter.

- Total length of the end device distance (e. g. from notebook/laptop to beamer or PC to monitor): 50 meters
- Hardware solution, no software required
- No external power supply required; the cable contains a copper fibre for power supply
- Small connector and cable dimensions; the cable has a smaller diameter than comparable cables made of pure copper due to the glass fibres.
- The practical plug design prevents the cable from slipping out of the DisplayPort socket.
- Compliant with DP v1.4 (max. 7680 x 4320 @60Hz)

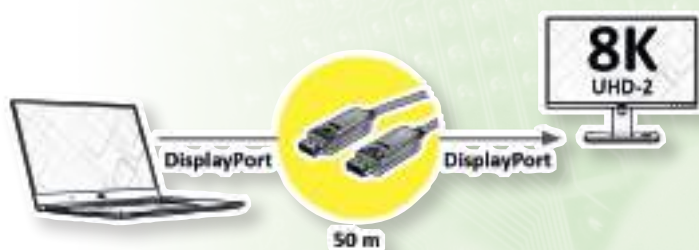

value®

Available August 2023

## ROLINE DisplayPort v1.4 Cable (AOC)

8K 4320p

With our UHD (7680x4320 @60Hz) capable DisplayPort fiber optic cable you have the possibility to connect up to 20m between your devices. The active cable (AOC) does not require a separate power supply and is particularly suitable for installation in the cable duct due to its small diameter.

- Total length of the end device distance (e. g. from notebook/laptop to beamer or PC to monitor): 20 meters
- Hardware solution, no software required
- No external power supply required; the cable contains a copper fibre for power supply
- Small connector and cable dimensions; the cable has a smaller diameter than comparable cables made of pure copper due to the glass fibres.
- The practical plug design prevents the cable from slipping out of the DisplayPort socket.
- Compliant DP v1.4 (max. 7680 x 4320 @60Hz)



roline®  
Designed for Professionals

Available August 2023

Order-No. – P.U.

ROLINE DisplayPort v1.4 Cable (AOC), M/M, 15 m	14.01.3491	– 1
ROLINE DisplayPort v1.4 Cable (AOC), M/M, 20 m	14.01.3493	– 1





# NEWSSHOP – New Products


## ROLINE HDMI Switch 8K60, 2-way

**8K**
**4320p**

**Displays the video output of up to 2 HDMI sources on a monitor or projector.**

- Can switch two 8K HDMI sources to one 8K HDMI display.
- Supports HDMI High Speed
- Video input can be switched by button on the switch or by remote control
- Supports nominal resolution of up to 7680 x 4320 @60Hz
- Supports high-resolution display of up to 480p, 576p, 720p, 1080i, 1080p, 2160p
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Power supply needed (5VDC, 1A)
- Colour: black

- Contents: HDMI Switch, USB power cable

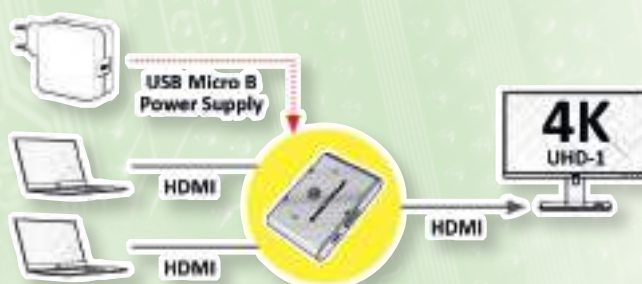

**roline®**  
Designed for Professionals

Available June 2023

Order-No. – P.U.

ROLINE HDMI Switch, 8K60, 2-way

14.01.3592 – 10

## VALUE Bi-Directional HDMI Switch 4K60, 2-way

**4K**
**2160p**

- Manual bidirectional HDMI switch for connecting different devices (e.g. DVD, Blu-ray player) with HDMI port.
- Manual select push button to alternate between application modes

- Possible applications:

- Two inputs to one output (2 to 1): Up to 2 different HDMI devices can be connected to a monitor, TV or projector, by pushing the button.
- One input to two outputs (1 to 2): One HDMI device can be connected to up to 2 screens.

- A simultaneous output to multiple screens is not possible.

- Connectors:

### Application 1

Input: 2 x HDMI

Output: 1 x HDMI

### Application 2

Input: 1 x HDMI

Output: 2 x HDMI

- Supports HDR
- HDMI port selection by button
- Resolution up to 3840 x 2160 (4K) 60 Hz (depending on the system and the connected hardware)
- No external power supply needed
- Plastic housing
- Colour: black
- Dual LEDs to display status
- Dimensions (LxWxH): 82 x 62 x 17 mm
- Contents: HDMI Switch



**Value®**

Order-No. – P.U.

VALUE Bi-Directional HDMI Switch 4K60, 2-way

14.99.3586 – 10

Available June 2023



## VALUE Bi-Directional DisplayPort Switch 4K60, 2-way

4K

2160p

- Manual bidirectional DP switch for connecting different devices (e.g. DVD, Blu-ray player) with DP port.
- Manual select push button to alternate between application modes
- Possible applications:
  - 2x inputs to one output (2 to 1): Up to 2 different DP devices can be connected to a monitor, TV or projector, by pushing the button.
  - 1x input to two outputs (1 to 2): One DP device can be connected to up to 2 screens.
- A simultaneous output to multiple screens is not possible.
- Connectors:

### Application 1

Input: 2 x DP  
Output: 1 x DP

### Application 2

Input: 1 x DP  
Output: 2 x DP

- Supports HDR
- DP port selection by button
- Resolution up to 3840 x 2160 (4K) 60 Hz (depending on the system and the connected hardware)
- No external power supply needed
- Plastic housing
- Colour: black
- Dual LEDs to display status
- Dimensions (LxWxH): 82 x 62 x 17 mm
- Contents: DP Switch



Order-No. – P.U.

VALUE Bi-Directional DisplayPort Switch 4K60, 2-way

14.99.3587 – 10


Value

Available June 2023

## VALUE HDMI Extender and Splitter over Twisted Pair, 40m

It is suitable for advertising, studios, multimedia classrooms, etc.

- HDMI extender kit with splitter functionality (1 input / 2 outputs)
- It distributes 1 HDMI input signal to 2 identical signal outputs, extends these signals up to 40 meters
- Max. supported resolution: 4K30Hz
- Bi-directional IR passthrough
- 3.5mm L/R audio output functions
- Supported Audio Formats: PCM, LPCM, DTS-HD, DTS-Audio
- Stable metal casing
- Dimensions: TX: 151.5x86.5x19mm // RX: 75x80x18mm
- Power supply included in delivery
- Contents: Transmitter, 2x Receiver, 3x power supply (RX: 2x 5VDC, 1A; TX: 1x 12 VDC, 1A), manual

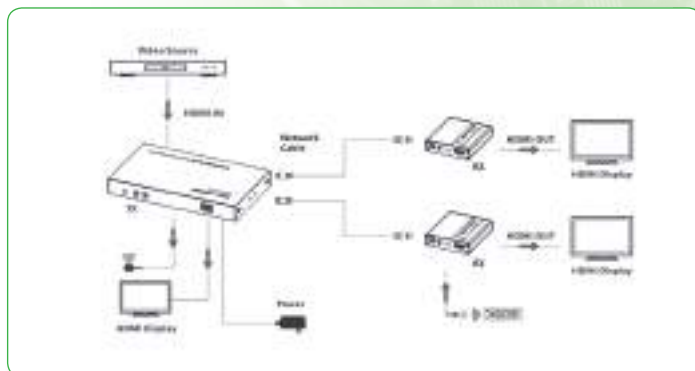

Order-No. – P.U.

VALUE HDMI Extender and Splitter over Twisted Pair, 40m

14.99.3464 – 4

Value

Available July 2023






# NEWSSHOP – New Products

## VALUE Audio/Video Extender, HDMI, via Cat.6A, 4K@60Hz

The VALUE HDMI A/V extender transmits an HDMI signal from a source device like a DVD player, a PC/laptop or a console via Cat.6A cable to a display device like a TV, monitor or beamer/projector - with a resolution of up to 3840x2160 @60Hz (max. 40m)!

Audio / video transmission is via HDMI and CAT. 6a cable. Up to 4K (3840x2160) @60Hz at a distance of up to 40m can be achieved.

- Transmits HDMI signals from source devices such as DVD players, PCs/laptops or consoles to a TV, monitor or beamer/projector.
- Resolution: 4K (3840x2160) @60Hz at up to 40m
- HDCP compatible
- Supports 3D video transmission
- Black metal housing
- Contents: transmitter, receiver, 1 power supply, manual

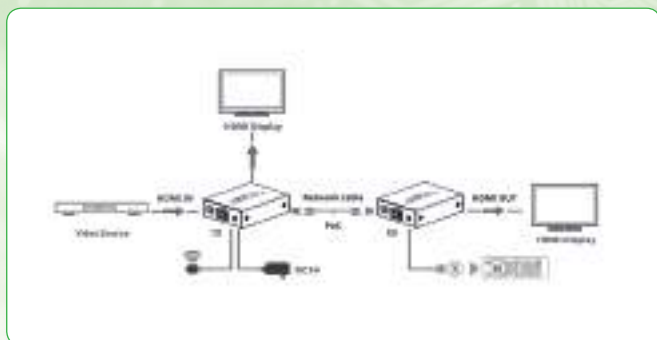

Order-No. – P.U.

VALUE Audio/Video Extender, HDMI, via Cat.6A, 4K@60Hz, 40m

14.99.3465 – 4

Available July 2023


## VALUE External Type M.2 NVMe SSD Enclosure with USB 3.2 Gen 2 Type C

Extra narrow empty housing made of matt aluminium for M.2 SSDs, for connection via USB 3.1 / USB 3.2 Gen 2 Type C

- Empty housing for M.2 SSDs with USB Type C connector
- External interface: USB type C
- Compatible with USB 3.1 / USB 3.2 Gen 2 with data transfer rates up to 10 Gbps
- Supports M.2 SSDs 2242, 2260, 2280 (M key)
- Suitable M- keyed M.2 NVMe SSD
- Matt, silver aluminium housing

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

- Contents: M.2 SSD Enclosure, manual, USB Type C cable

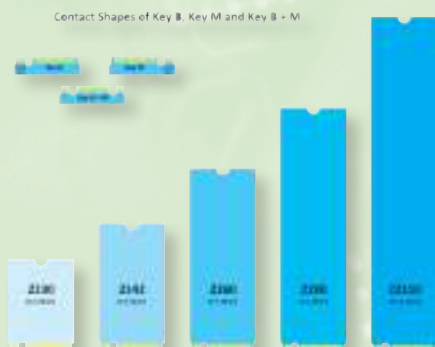

Order-No. – P.U.

VALUE External Type M.2 NVMe SSD Enclosure with USB 3.2 Gen 2 Type C

16.99.4132 – 5


Available July 2023




## VALUE 19" PDU for Cabinets 8x / 7x, German Type

19" PDU with 8x/7x German Type socket and supply cable (1.8m) with German Type plug, 1U, for installation in 19" cabinets, incl. installation angle.

- 19" socket strip (1 UH) for installation in 19" cabinets, incl. mounting bracket
- Arrangement of sockets: 45°.
- Anodised aluminium profile
- Cable type: 1.8m H05VV-F 3G 1.5mm<sup>2</sup>, black
- Maximum load: 3600W
- Colour: ALU / black
- width: 440mm

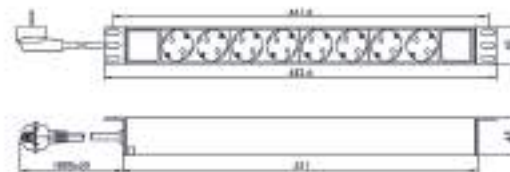

19.99.1632

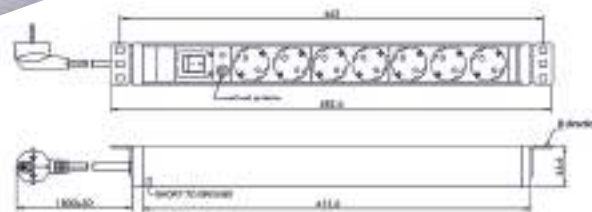

19.99.1633

Various fixing positions of the 19" ear kit (45°) - only 19.99.1633

Order-No. – P.U.

VALUE 19" PDU for Cabinets 8x, 45°, German Type, black, 1.8 m

19.99.1632 – 10

VALUE 19" PDU for Cabinets 7x, 45°, German Type, 1.8m, w. Switch

19.99.1633 – 10


Value®

Available July 2023

## ROLINE PDU for Cabinet, 8x, 45°, German Type, with lighted Switch

- 19" socket (1UH) for installation in 19" cabinets, incl. installation angle
- Arrangement of sockets: 45°
- Profile of anodized aluminium

- Cable type: 2.0m H05VV-F 3G 1,50mm<sup>2</sup>, black
- Max load: 3600W
- Color: black
- Width: 440mm

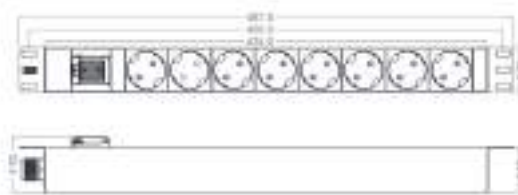

Order-No. – P.U.

ROLINE PDU for Cabinet, 8x, 45°, German Type, with lighted Switch, black, 2 m

19.07.1619 – 10

**roline®**  
Designed for Professionals

Available June 2023






# NEWSSHOP – New Products

## VALUE Universal Crimping Tool 8P/8C

- For 8-pole crimping modular plugs (RJ45) with or without strain latch
- Suitable for cutting, insulation removal (ribbon cable) and crimping
- Fitted with a forced lock with unlocking capability
- Universally usable
- Robust metal tongs

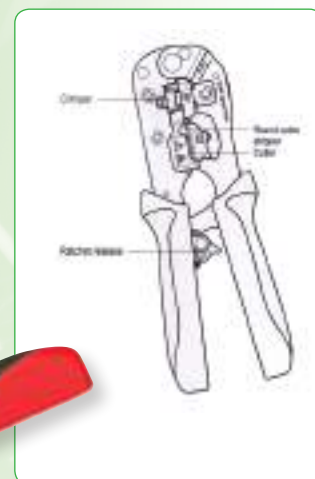

VALUE Universal Crimping Tool 8P6P, 6P4C

Order-No. – P.U.  
25.99.8794 – 5

Value®

On stock

## VALUE Cable Tie Removal Tool

- Tool operation: actuate trigger until cut-off occurs.
- Cut-off depends on the tension setting selected
- Sharp Blade to cut the tie or the head of the cable tie in a simplest way
- Ergonomic Dual-Color Grip
- Handle Lock for better storage
- Spring-loaded for quick opening



VALUE Cable Tie Removal Tool

Order-No. – P.U.  
19.99.1007 – 10

Value®

On stock



## ROLINE PREMIUM Wall Mount TV Holder, < 203.2cm (37"-80"), VESA 600x400, <70kg


With a concise and contemporary design, the TV holder strikes an ideal balance of aesthetics and functionality that provides a more enjoyable user experience. The mount securely supports TVs up to 70kg and offers a full range of motion that extends, retracts, tilts and positions the TV to accommodate any room or viewing position.

Extending or retracting your TV has never been easier- an improved structure with built-in copper bushings provides the smoothest movement when the mount is extended and folded back against the wall.

- Premium Aluminum Full-Motion TV Wall Mount
- Dual-arm full-motion wall mount for TVs (LED, LCD flat panel TVs) up to 203,2 cm (37" - 80")
- **Max. weight: 70 kg**
- This mount extends out 660 mm from the wall and allows TVs to turn 60° left or right (swivel range)
- Full motion allows maximum flexibility- tilt and swivel your TV for easy viewing from any seat in a room
- Post-installation level adjustment allows the TV to „roll“ up to 2° clockwise and counterclockwise to ensure it's perfect level
- Integrated cable management system keeps cables organized and protected
- Built-In Copper Bushing: for smoother movements
- **Magnetic Contact: easily attach the decorative covers**

### Specifications

- Material: Aluminium, Steel and Plastic
- Product weight: 12.1kg
- Recommended Screen Size: 37" - 80" (94 cm - 203.2 cm)
- Installation: Solid wall, Double Stud
- Max. Load Capacity: 70 kg
- VESA Standard: 200x200, 200x300, 300x200, 200x400, 400x200, 300x300, 300x400, 400x300, 400x400, 600x400
- Max.VESA: 600x400
- Tilt: -10° - +5°
- Swivel: -60° - +60°

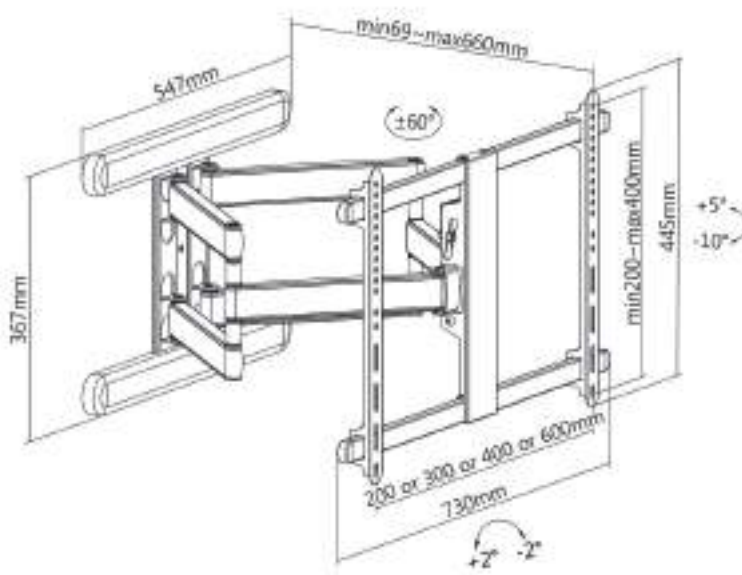

**roline®**  
Designed for Professionals

Available August 2023

Order-No. – P.U.

ROLINE PREMIUM Wall Mount TV Holder, up to 203.2cm (37" - 80"), < 70kg, VESA 800x600

17.03.1246 – 1




NEW

# NEWSSHOP – New Products

**VALUE TV Wall Mount, Fixed / Tiltable, 27/47mm Wall Distance, < 75kg, VESA 600x400, <203.2cm (80")**

Stable and fixed/tiltable TV wall mount with just 27/47mm wall distance - the load capacity is up to 75kg and the mount supports maximum VESA 600x400.


- For screens from 37" to 80" (max. VESA 600x400)
- Load capacity up to 75kg
- Tilttable suspension
- Tilt range: +4°--10° (only 17.99.1221)
- Very small wall distance of 27mm (17.99.1222) / 47mm (17.99.1221)
- Securing against unintentional loosening of the mounting hooks
- Integrated spirit level

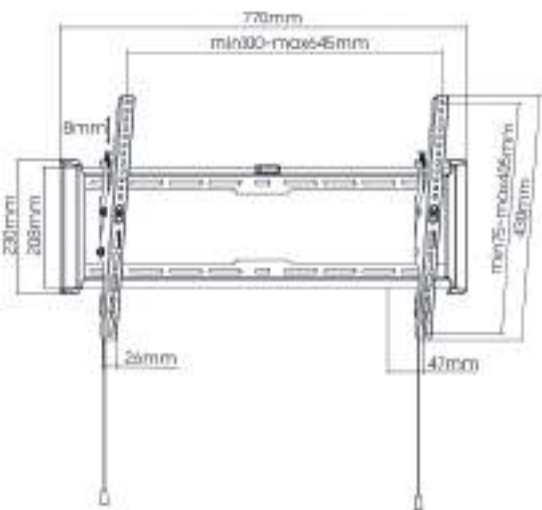

17.99.1221

#### Specifications:

Material: Steel, Plastic  
 Surface Finish: Powder Coating  
 Color: Black & Dark Grey  
 Dimensions: 47 x 770 x 430mm (1.9"x30.3"x16.9")  
 Fit Screen Size: 37" - 80"  
 Fit Curved TV: Yes  
 Mounting Hole Pattern: VESA & Universal  
 VESA Compatible: 200x200, 300x200, 300x300, 400x200, 400x300, 400x400, 600x400  
 Max. Mounting Hole: 650 x 405mm  
 Weight Capacity: 75kg  
 Profile: 47mm (1.9")  
 Tilt Range: +4° - -10°  
 Screen Level: 8mm

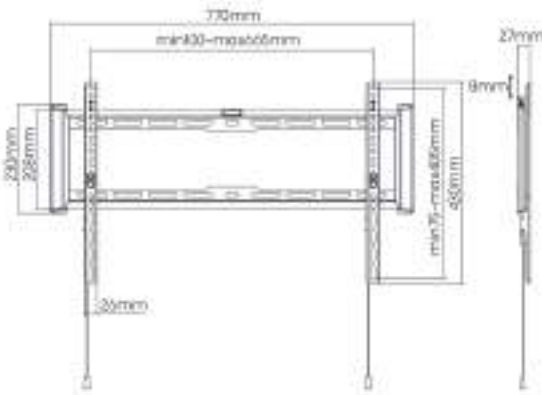

17.99.1222

#### Specifications:

Material: Steel, Plastic  
 Surface Finish: Powder Coating  
 Color: Black & Dark Grey  
 Dimensions: 27 x 770 x 430mm (1.06"x30.3"x16.9")  
 Fit Screen Size: 37" - 80"  
 Fit Curved TV: Yes  
 Mounting Hole Pattern: VESA & Universal  
 VESA Compatible: 200x200, 300x200, 300x300, 400x200, 400x300, 600x400  
 Max. Mounting Hole: 650 x 405mm  
 Weight Capacity: 75kg  
 Profile: 27mm (1.06")  
 Screen Level: 8mm



Order-No. – P.U.

VALUE TV Wall Mount, 47mm Wall distance, < 75kg, VESA 600x400, tilttable

17.99.1221 – 6

VALUE TV Wall Mount, 27mm Wall distance, < 75 kg, (VESA 600x400), fixed

17.99.1222 – 8

**Value**


Available August 2023



## VALUE TV Wall Mount, Fixed/Tiltable, 27/47mm Wall Distance, < 75kg, VESA 800x400, <228,6cm (90")

Stable and fixed/tiltable TV wall mount with just 27/47mm wall distance - the load capacity is up to 75kg and the mount supports maximum VESA 800x400.


- For screens from 43" to 90" (max. VESA 800x400)
- Load capacity up to 75kg
- Tiltable suspension
- Tilt range: +4°/-10° (17.99.1223)
- Very small wall distance of 27mm (17.99.1224) / 47mm (17.99.1223)
- Securing against unintentional loosening of the mounting hooks
- Integrated spirit level

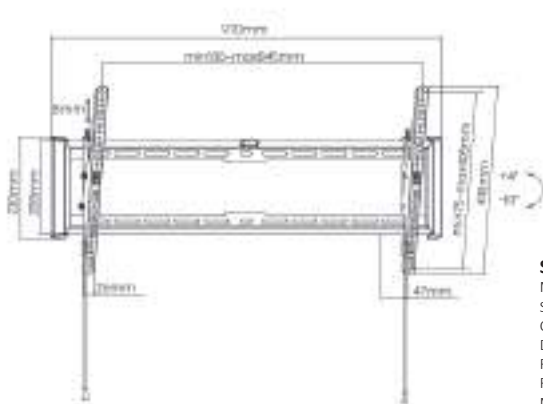

### Specifications:

Material: Steel, Plastic  
 Surface Finish: Powder Coating  
 Color: Black & Dark Grey  
 Dimensions: 47 x 970 x 430mm (1.9"x38.2"x16.9")  
 Fit Screen Size: 43" - 90"  
 Fit Curved TV: Yes  
 Mounting Hole Pattern: VESA & Universal  
 VESA Compatible: 200x200, 300x200, 300x300, 400x200, 400x300, 400x400, 600x400, 800x400  
 Max. Mounting Hole: 850 x 405mm  
 Weight Capacity: 75kg  
 Profile: 47mm (1.9")  
 Tilt Range: +4° - -10°  
 Screen Level: 8mm

17.99.1223

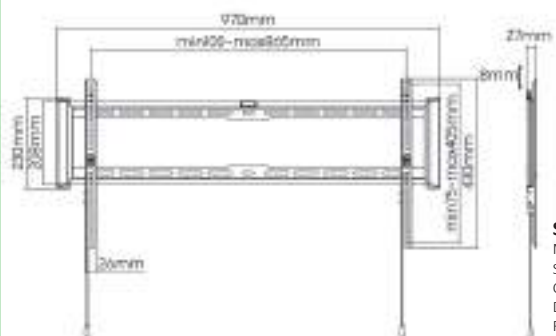

### Specifications:

Material: Steel, Plastic  
 Surface Finish: Powder Coating  
 Color: Black & Dark Grey  
 Dimensions: 27 x 970 x 430mm (1.06"x38.2"x16.9")  
 Fit Screen Size: 43" - 90"  
 Fit Curved TV: Yes  
 Mounting Hole Pattern: VESA & Universal  
 VESA Compatible: 200x200, 300x200, 300x300, 400x200, 400x300, 400x400, 600x400, 800x400  
 Max. Mounting Hole: 850 x 405mm  
 Weight Capacity: 75kg  
 Profile: 27mm (1.06")  
 Screen Level: 8mm

17.99.1224



VALUE TV Wall Mount, 47mm Wall Distance, < 75kg, 800x400, <228,6cm (90"), tiltable  
 VALUE TV Wall Mount, 27mm Wall Distance, < 75kg, 800x400, <228,6cm (90"), fixed

Order-No. – P.U.  
 17.99.1223 – 6  
 17.99.1224 – 8

Value®

Available August 2023





# NEWSSHOP – New Products


## ROLINE Monitor Stand, Gas Spring, Desk Clamp, Pivot, max. 20 kg (Heavy Duty)

LCD monitor arm, for easy and reliable adjustment of a monitor weighing up to 20kg (weight adjustment between 2kg and 20 kg) and VESA 75/100!

- Supports monitors up to 124.46cm ( 49")
- Streamlined design
- Made of high quality aluminum alloy
- Gas spring integrated allows users to move the LCD panel in most positions at will
- Meets VESA 75 (75x75 mm) or VESA 100 (100x100 mm)
- Special feature: Pivot function- screen is 90 degrees rotatable
- Small desktop mount saves space
- A clever cable management is built into the rear arm
- Color: Black & Dark Grey

### Specifications:

- Fits Curved Monitor: < 124,46 cm (49")
- Material: Aluminum, Steel, Plastic
- Weight/Load Capacity: 2 – 20kg
- VESA Compatible: 75x75, 100x100
- Tilt Range: +50° – -20°
- Swivel Range: +90° – -90°
- Screen Rotation: +180° – -180°
- Arm Full Extension: 542mm
- Installation: Clamp, Grommet
- Suggested Desktop Thickness:
  - Clamp 10 – 85mm
  - Grommet 10 – 48mm
- Quick Release VESA Plate: Yes
- Cable Management: Yes

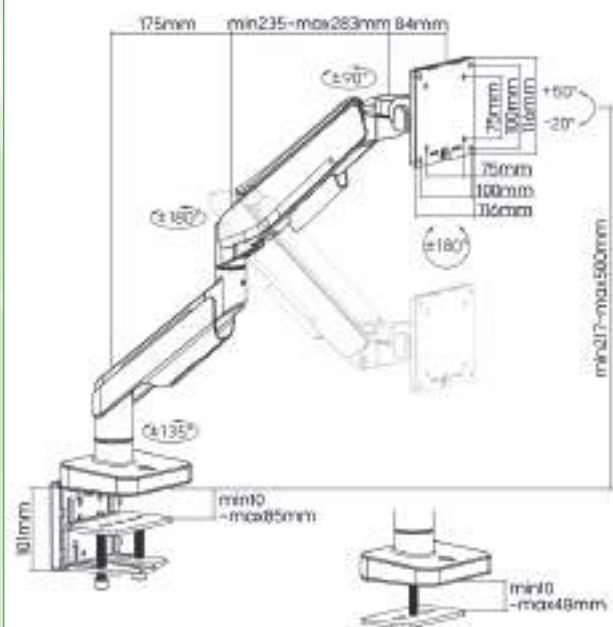

Order-No. – P.U.

ROLINE Monitor Stand, Gas Spring, Desk Clamp, max. 20 kg, 5 Joints 17.03.1108 – 3

**roline**<sup>®</sup>  
Designed for Professionals

Available August 2023




## ROLINE Dual Monitor Stand, Gas Spring, Desk Clamp, Pivot, max. 20 kg (Heavy Duty)

Dual monitor arm, for easy and reliable adjustment of two monitors with up to 20 kg each (weight adjustment between 1 kg and 20 kg) and VESA 75/100!

- Supports monitors up to 88.9cm (35")
- Streamlined design
- Made of high quality aluminum alloy
- Gas spring integrated allows users to move the LCD panel in most positions at will
- Meets VESA 75 (75x75 mm) or VESA 100 (100x100 mm)
- Special feature: Pivot function- screen is 90 degrees rotatable
- Small desktop mount saves space
- A clever cable management is built into the rear arm
- Color: Black & Dark Grey

### Specifications:

- Fits Curved Monitor: < 88.9 cm (35")
- Material: Aluminum, Steel, Plastic
- Weight/Load Capacity: 2 – 20kg
- VESA Compatible: 75x75, 100x100
- Tilt Range: +50° – -20°
- Swivel Range: +90° – -90°
- Screen Rotation: +180° – -180°
- Arm Full Extension: 542mm
- Installation: Clamp, Grommet
- Suggested Desktop Thickness:
  - Clamp 10 – 85mm
  - Grommet 10 – 48mm
- Quick Release VESA Plate: Yes
- Cable Management: Yes

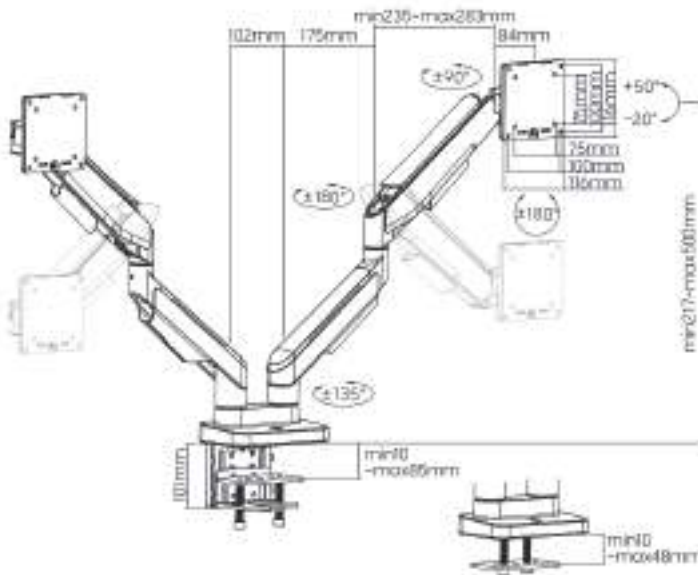





**VALUE Single/Dual LCD Monitor Arm, Pole Mount, 4 Joints, Desk Clamp**

- Single /Dual Monitor Pole-Mounted Spring-Assisted Arm, four joints
- Pole Mount
- With a C-clamp for desk mount up to 8 cm thickness
- The height of the LCD monitor is adjustable
- Meets VESA 75 (75 x 75 mm) or VESA 100 (100 x 100 mm)

**Specifications:**

- Load capacity: up to 9 kg
- Tilt Range: +35° – -35°
- Swivel Range: +90° – -90°
- Screen Rotation: +180° – -180°
- Arm Full Extension: 468 mm
- Pole Height: 308 mm
- Suggested Desktop Thickness:  
Clamp: 10 – 85mm  
Grommet: 10 – 40mm
- Installation: Clamp, Grommet

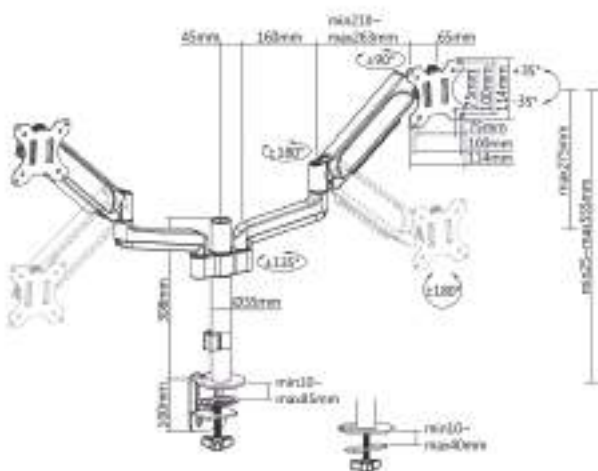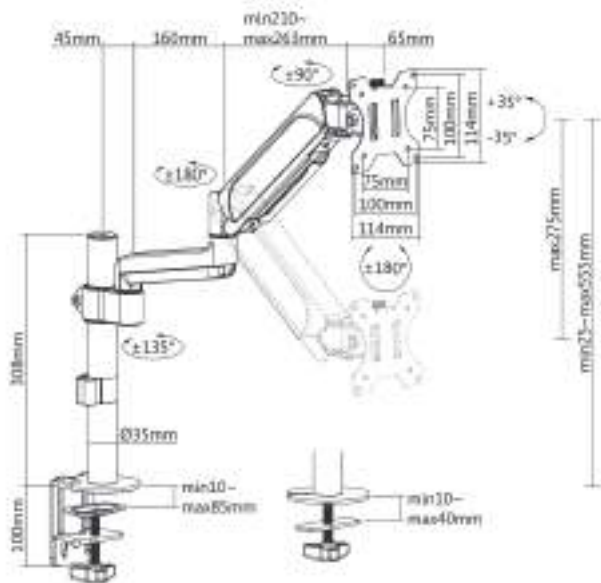

Order-No. – P.U.


VALUE Single LCD Monitor Arm, Pole Mount, 4 Joints, Desk Clamp	17.99.1181	- 1
VALUE Dual LCD Monitor Arm, Pole Mount, 4 Joints, Desk Clamp	17.99.1182	- 1



**Available August 2023**



Arm Full Extension: 453mm(17.8")

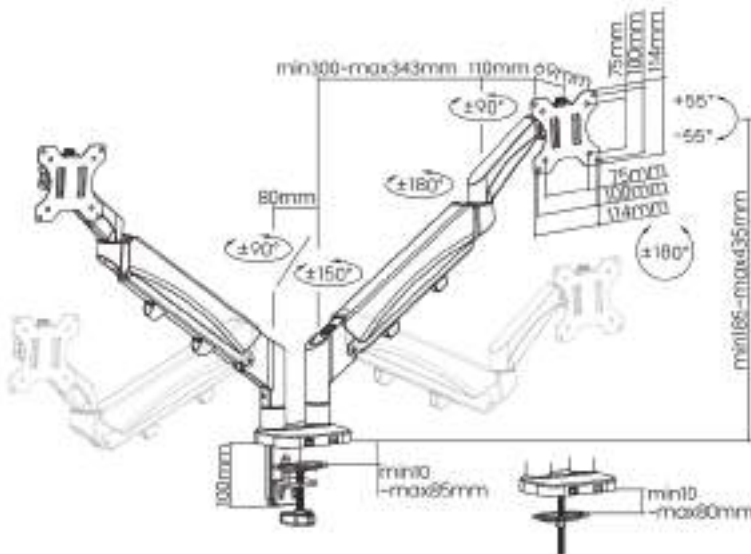





# NEWSSHOP – New Products

## ROLINE Underdesk Mount Storage Drawer

### Suitable for organized storage of tablets, mobile phones, mouse, headphone


- Heavy-duty steel construction
- Suitable for a lot of types of thin clients and small cpus
- Under-Desk Installation: it saves valuable desk space and also keeps cpu free from dust
- Smooth Sliding Mechanism: opens and shuts quietly
- Ultra-slim design
- Maximum weight should not exceed 8 kg
- Can be fixed under your desktop using the supplied fixings screws
- Dimensions: 410 x 272- 470 x 50.8mm (17.03.0114) / 460 x 272- 470 x 113 mm (17.03.0115)
- Content: 4x mounting screws, installation instructions

### Specifications:


- Material: Steel
- Surface Finish: Powder Coating
- Color: Black
- Dimensions: 410/460 x 272 – 470 x 50.8 / 113mm (18.1" x 10.7" – 18.5" x 4.4")
- Weight Capacity: 8 kg
- Track Travel: 200mm (7.9")
- Suggested Desktop Thickness:  $\geq 18\text{mm}$  ( $\geq 0.71"$ )
- Storage for: Tablet, Mobile Phone, Mouse, Headphone



17.03.0114

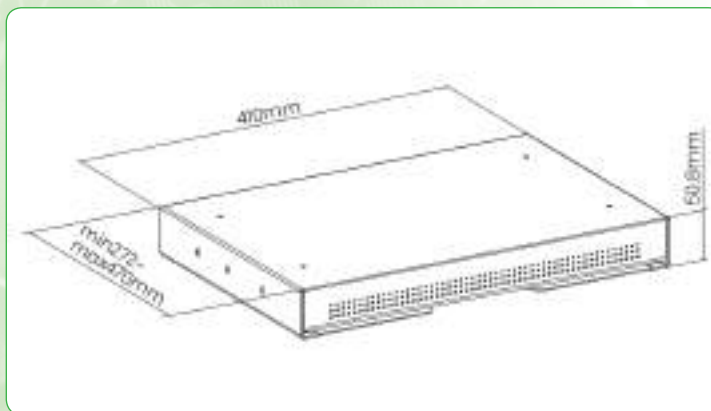

17.03.0115

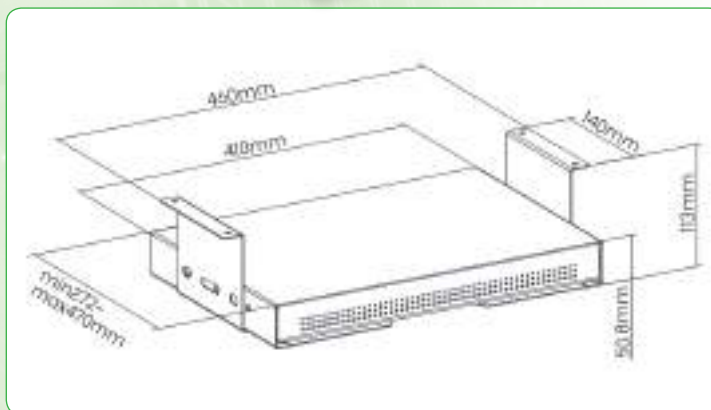

### Order-No. – P.U.

ROLINE Underdesk Mount Storage Drawer

17.03.0114 – 5

ROLINE Underdesk Mount Storage Drawer with Shelf

17.03.0115 – 5

**roline**<sup>®</sup>  
Designed for Professionals

Available August 2023



## ROLINE Large Size Versatile Desktop Riser

This desktop riser is ready to end any crowded desktop by providing more storage space with three ways to install.

Load capacity of up to 20 kg.

- Large Size Versatile Desktop Riser
- Three Ways to Install: side clamp, top clamp and freestanding
- Space-Saving Design: free up and gain additional desktop work space
- Raise your monitor to the most comfortable viewing position
- Solid steel feet provide strong support
- Design with the simplest appearance but reliable functions

### Specifications:

Max. Load: 20 kg


Material: Stainless Steel, Particle Board

Applicable Devices: Monitor

Fit Screen Size: 13" – 32"

Surface Thickness: 12mm

Dimensions: 550 x 250 x 236mm

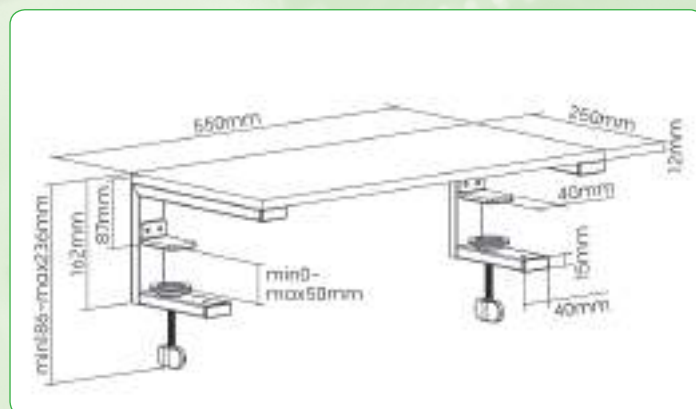

Top Clamp & Freestanding Setup



Order-No. – P.U.

ROLINE Large Size Versatile Desktop Riser

17.03.0116 – 6

**roline**<sup>®</sup>  
Designed for Professionals

Available August 2023





# NEWSSHOP – New Products


## VALUE Clamp Mount Pegboard

The pegboard set provides functional, versatile, and stylish home organization products with oval peg holes and waterproof surfaces. From office supplies, and decorations, to crafts and books, this modern-style mounting shelf set is the perfect piece for storage and display. Moreover, sturdy steel construction & powder coating surface provide a solid and long-lasting performance.

- Clamp Mount Pegboard
- Panels can join horizontal or vertical: can adapt to different table sizes
- Easy Installation: No tools required
- Clamp Mounting Design: firmly attaches to the table, providing great stability
- Magnetic: Yes
- Pegboard Accessories:
  - 1x Pen Holder, 1x Storage Shelf,
  - 1x Cup Holder, 1x Pin Magnet, 2x Hook

### Specifications:

Material: Steel, Plastic  
Surface Finish: Powder Coating  
Dimensions: 420 x 99 x 477mm (16.5"x3.9"x18.8")  
Weight Capacity: 5kg / Piece  
Applicable Device: Universal  
Color: Matte Light Grey  
Magnetic: Yes

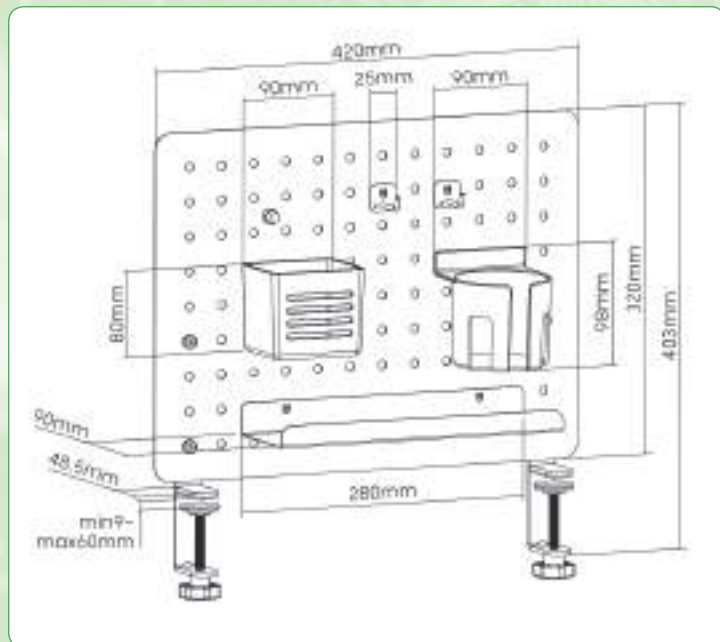

Order-No. – P.U.  
17.99.0098 – 4

VALUE Clamp Mount Pegboard



Available August 2023





## VALUE Gaming-/Office Clamp Mount Pegboard

The pegboard set provides functional, versatile, and stylish home organization products with oval peg holes and waterproof surfaces. From gaming / office supplies, and decorations, to crafts and books, this modern-style mounting shelf set is the perfect piece for storage and display. Moreover, sturdy steel construction & powder coating surface provide a solid and long-lasting performance.

- Clamp Mount Pegboard
- Panels can join horizontal or vertical: can adapt to different table sizes
- Easy Installation: No tools required
- Clamp Mounting Design: firmly attaches to the table, providing great stability
- Magnetic: Yes

- Pegboard Accessories:  
3x Pin Magnet, 1x Cup Holder,  
2x Hook, 2x Gaming Controller Hook,  
1x Headphone Hook

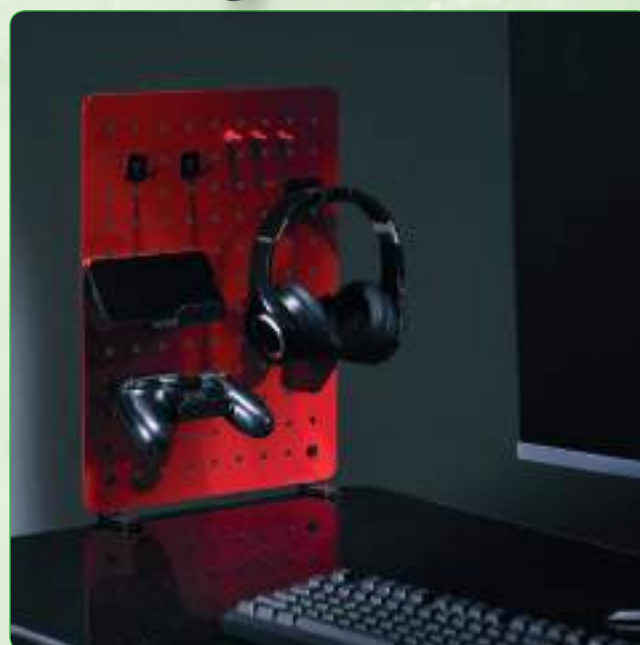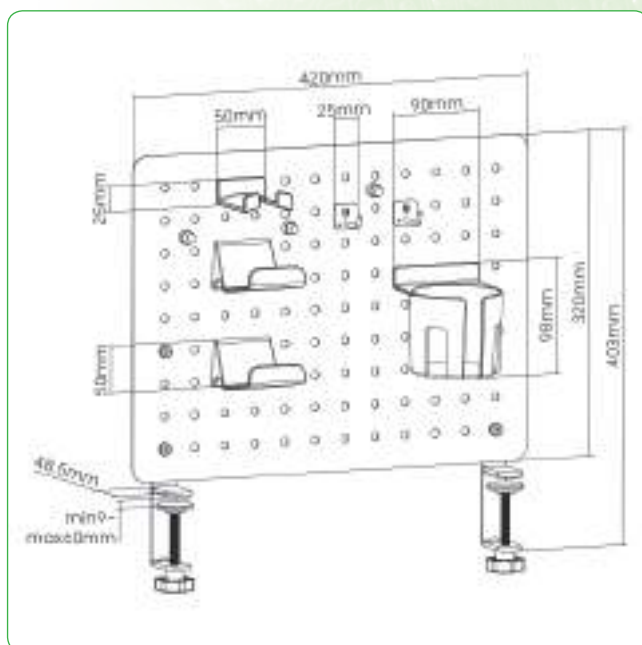

Order-No. – P.U.

VALUE Gaming-/Office Clamp Mount Pegboard, red

17.99.0099 – 4


Value®

Available August 2023

## ROLINE Flex Cable Duct, TPE, 60mm, 1.8m

The cable bridge not only covers the cables lying on the floor, it also prevents stumbling hazards. The cable bridge has sloping non-slip sides and has three cable passages that separate data and power cables to prevent signal interference.

- Protects against stumbling hazards
- Three channels
- Voltage and data cables separated
- Dimensions (WxDxH): 60 x 1800 x 12 mm
- Color: black
- Adhesive pads

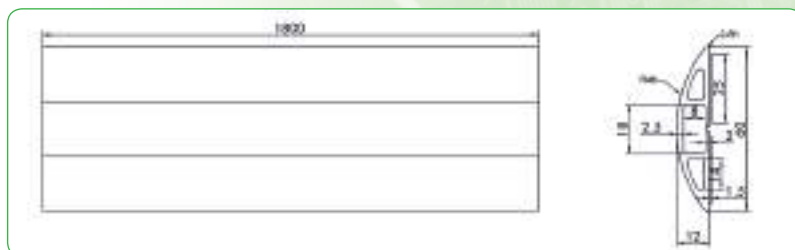

Order-No. – P.U.

ROLINE Flex Cable Duct, TPE, 60mm, black, 1.8 m

19.08.3105 – 8



roline®  
Designed for Professionals

Available March 2023





# NEWSSHOP – New Products


## VALUE Tabletop Stand/Freestanding Base for Tablet

- Universal Tablet Tabletop Stand - can cover all your needs of using a tablet/smart-phone whether you are at home or in the office, convenient for reading, typing, watching videos, video calls, online meeting and courses, etc.
- The sleek and stylish design offers elegant appearance
- **With adjustable holder, it can grab 4.7"-12.9" tablets**
- Large solid base can firmly hold tablets with a weight up to 1kg
- You can place your device at optimal viewing position with angle adjustment function
- The soft rubber pads hold your device securely without scratches or damages.
- Integrated Ball Joint: allows rotate, tilt and swivel in any direction
- Adjustable Angle Viewing: for optimal viewing position
- Adjustable Mounting Panel: grab different tablets firmly and flexibly
- Large Solid Base: for enhanced stability

• **REMARK: product will be delivered in black color / Tablet is not included**

### Specifications

- Material: Aluminum, Plastic, Steel
- Surface Finish: Powder Coating
- Color: Black
- Dimensions: 160 x 160 x 330mm (6.3"x 6.3"x 13")
- Fit Screen Size: 4.7"- 12.9"
- Weight Capacity: 1kg
- Tilt Range: +210° - -60°
- Swivel Range: +52° - -52°
- Screen Rotation: +180° - -180°
- Adjustable Holder Width: 128 - 224mm (5" - 8.8")

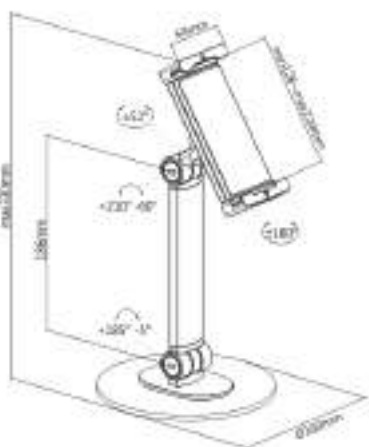

**360° Rotation**  
for placing your device in portrait  
or landscape position



**Anti-Slip Rubber Pads**  
prevent scratches to surfaces

Order-No. - P.U.

17.99.1193 - 15

**Value**<sup>®</sup>

Available August 2023




VALUE Tabletop Stand/Freestanding Base for Tablet holder, black



## VALUE Universal Adjustable Tablet Clamp Mount

- Universal Tablet Clamp perfectly fits daily work and entertainment needs
- **Widely compatible with most any 4.7" - 12.9" tablets**
- Flexible joint adjustment enables a whole new level of versatility
- Integrated Ball Joint: allows to rotate, tilt and swivel in any direction
- Adjustable Angle Viewing: for optimal viewing position
- Adjustable Mounting Panel: grab different tablets firmly and flexibly
- Clamp Mounting Design: firmly attaches to the table, providing great stability
- Precise cutouts for complete access to all buttons, cameras, speakers and ports.
- The C-clamp is compatible with most work surfaces within 10- 55mm (0.39" – 2.2") and holds the device without shaking
- Multiple protective pads hold the device securely and prevent scratches
- The 360° mounting head can be rotated freely for any desired viewing angle
- Color: matte black

• **REMARK:** product will be delivered in black color / Tablet is not included

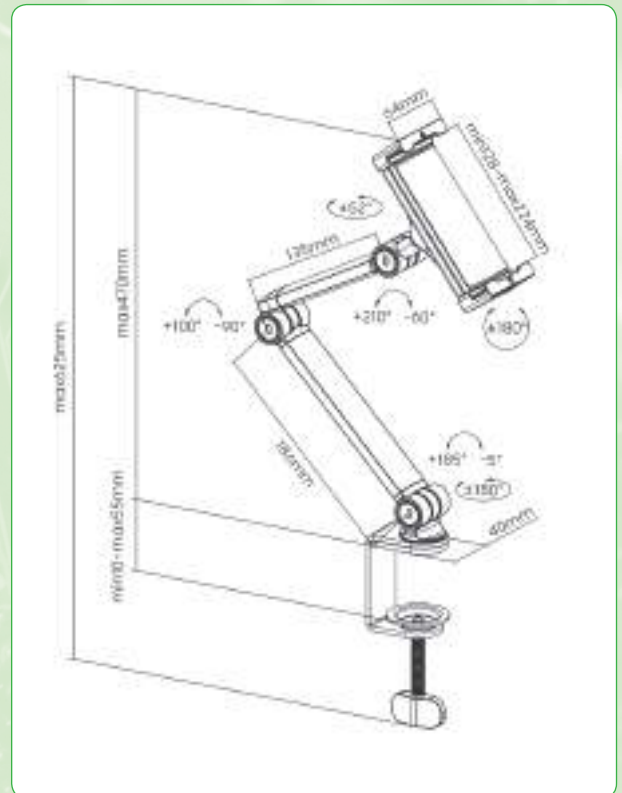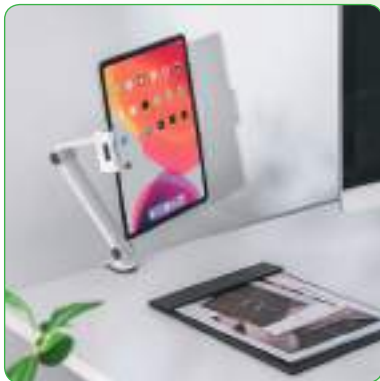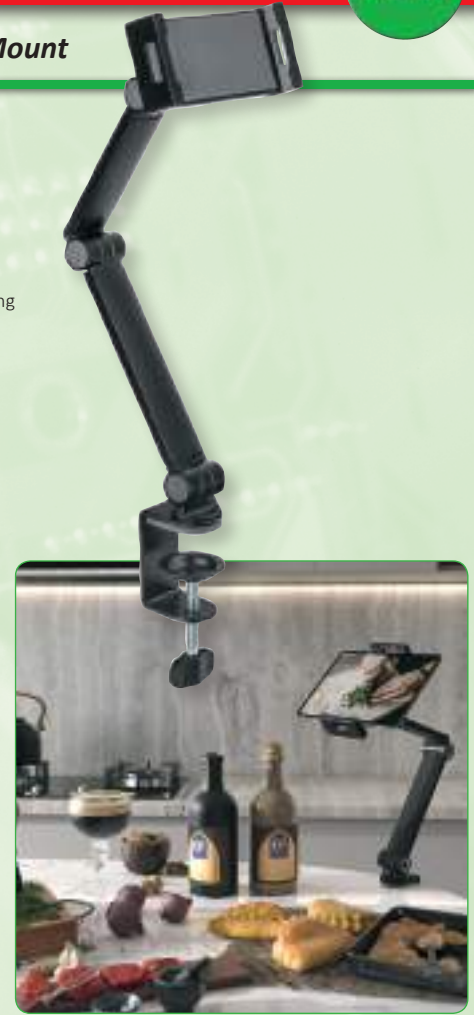

Value®

Order-No. – P.U.

VALUE Universal Adjustable Tablet Clamp Mount , black

17.99.1194 – 20

Available August 2023



# [ Network Components

## VALUE / ROLINE USB to Fast / Gigabit Ethernet Converter

These converters are a cost effective solution to convert a USB port into a Fast- or Gigabit Ethernet port

- Easy installation- just plug the converter into the USB port, connect the LAN cable- done!
- Bus Powered- no external power supply required
- Supports 10/100/1000 Mbit/s auto-sensing capability in Gigabit Ethernet
- Supports both full-duplex and half-duplex operation in Gigabit Ethernet



Ethernet continues to be the most used network interface as the standard evolves to meet the massive data bandwidth requirements of different markets. Due to the upward trend in data traffic, new Ethernet rates have been developed to alleviate the traffic bottlenecks created by the data explosion, therefore the 2.5 Gigabit Ethernet standard was designed to bridge the copper-twisted-pair gap between Gigabit Ethernet and 10 Gigabit Ethernet.

12.99.1105



12.02.1106



12.99.1107



12.99.1116



12.02.1107



12.99.1115



12.02.1108




12.02.1109



12.02.1110



12.02.1111



2.5 Gbit/s - 12.02.1103



Brand	Description	USB Compliant	Network Connection	USB Type	Color	Supported OS	Hub Function	Item Number	PU
VALUE	USB to Fast Ethernet Converter	USB 2.0	Fast Ethernet	A	black	Win XP / 7 / 8 / 10, Mac OS X		12.99.1107	- 10
VALUE	USB to Gigabit Ethernet Converter	USB 3.2 Gen 1	Gigabit Ethernet	A	black	Win XP / 7 / 8 / 10, Mac OS X		12.99.1105	- 10
VALUE	USB to Gigabit Ethernet Converter	USB 3.2 Gen 2	Gigabit Ethernet	C	black	Win XP / 7 / 8 / 10, Mac OS X		12.99.1115	- 10
VALUE	USB to Gigabit Ethernet Converter + 3x Hub	USB 3.2 Gen 1	Gigabit Ethernet	A	black	Win XP / 7 / 8 / 10, Mac OS X	3x USB A	12.99.1116	- 10
ROLINE	USB to Gigabit Ethernet Converter	USB 3.2 Gen 1	Gigabit Ethernet	A	black	Win XP / 7 / 8 / 10, Mac OS X		12.02.1106	- 10
ROLINE	USB to Gigabit Ethernet Converter + 3x Hub	USB 3.2 Gen 1	Gigabit Ethernet	A	black	Win XP / 7 / 8 / 10, Mac OS X	3x USB A	12.02.1107	- 5
ROLINE	USB to Gigabit Ethernet Converter + 3x Hub	USB 3.2 Gen 1	Gigabit Ethernet	C	black	Win XP / 7 / 8 / 10, Mac OS X	3x USB A	12.02.1108	- 10
ROLINE	USB to Gigabit Ethernet Converter	USB 3.2 Gen 2	Gigabit Ethernet	C	white	Win XP / 7 / 8 / 10, Mac OS X		12.02.1109	- 10
ROLINE	USB to Gigabit Ethernet Converter	USB 3.2 Gen 2	Gigabit Ethernet	C	silver	Win XP / 7 / 8 / 10, Mac OS X		12.02.1110	- 10
ROLINE	GOLD USB to Gigabit Ethernet Converter	USB 3.2 Gen 2	Gigabit Ethernet	C	golden	Win XP / 7 / 8 / 10, Mac OS X		12.02.1111	- 10
ROLINE	USB to 2.5 Gigabit Ethernet Adapter	USB 3.2 Gen 2	2.5 Gigabit Ethernet	C	black	Win XP / 7 / 8 / 10, Mac OS X		12.02.1103	- 5



## ROLINE Fast Ethernet Switch, Pocket

Very flat pocket size switch in stable metal casing.

- Ports: 5x/8x 10/100BaseTX
- Metal casing
- Auto-MDI/MDIX
- Auto-Negotiation
- Store and Forward
- Non-Blocking
- Supports full-duplex and Flow Control
- MAC addresses: 2K
- Dimensions:  
79 x 62 x 20 mm / 94 x 62 x 20 mm
- Power supply: 5 VDC 1.2A or over USB connection from the PC
- Contents: Switch, power supply, USB power cable, manual



**roline**  
Designed for Professionals

Order-No. – P.U.

ROLINE Fast Ethernet Switch, Pocket, 5 Ports

21.14.3133 – 4

ROLINE Fast Ethernet Switch, Pocket, 8 Ports

21.14.3134 – 4

## ROLINE Gigabit Ethernet Switch, Pocket

This product is compact in size, making it ideal for SOHO users with limited space to strengthen its network connection.

- 4x / 8x 10/100/1000BaseTX ports
- Very compact, metal pocket size casing
- Auto-MDI/MDIX
- Auto-negotiation
- Store and forward switching
- Non-blocking
- MAC addresses: 1K / 8K
- Power supply: 5 VDC 1.2A or over USB connection from the PC
- Contents: Switch, power supply, USB power cable, manual



**roline**  
Designed for Professionals

Order-No. – P.U.

ROLINE Gigabit Ethernet Switch, Pocket, 4 Ports

21.14.3514 – 4

ROLINE Gigabit Ethernet Switch, Pocket, 8 Ports

21.14.3530 – 4

## VALUE Gigabit PoE Injector

The VALUE Gigabit PoE Injector is a so-called PSE, a unit to supply power for e.g. surveillance cameras, and LAN devices such as access points, bridges and routers over Ethernet cable.

A PSE supplies the current together with the data in the network cable. It doesn't need no longer an additional own power supply of the device.

- Supply of data and power into the network cables

- Connectors: 1x RJ-45 port (Data In, Data input), 1x IEC power socket (Power In, input power supply), 1x RJ-45 port (Data & Power Out, output data and power)
- Compatible with 802.3af and 802.3at
- Power via PoE: up to 30W
- LED indicators for Power, Link / Act. and PoE
- Output voltage: 802.3af standard (46V-55V DC)
- Contents: Injector, manual



**Value**



Order-No. – P.U.

VALUE Gigabit PoE Injector

21.99.1498 – 10

## ROLINE Gigabit PoE Injector

The ROLINE Gigabit PoE Injector is a so-called PSE, a unit to supply power for e.g. surveillance cameras, and LAN devices such as access points, bridges and routers over Ethernet cable.

A PSE supplies the current together with the data in the network cable. It doesn't need no longer an additional own power supply of the device.

- Supply of data and power into the network cables
- Connectors: 1x RJ-45 port (Data In,

Data input), 1x IEC power socket (Power In, input power supply), 1x RJ-45 port (Data & Power Out, output data and power)

- Compatible with 802.3af and 802.3at
- Power via PoE: up to 30W
- LED indicators for Power, Link / Act. and PoE
- Output voltage: 802.3af standard (46V-52V DC)
- Contents: Injector, manual



**roline**  
Designed for Professionals

Order-No. – P.U.

ROLINE Gigabit PoE Injector

21.13.1199 – 6



# [ Network Components / Cables


## VALUE UTP Patch Cord Cat.5e/Class D

Cat.5e  
Class D

U/UTP

- Prepared cable with unshielded RJ-45 plug on both ends (without coding) incl. kink protection.
- Connection cable for structured building cabling.
- Impedance: 100 Ohm.
- Contact settings 1:1 in accordance with EIA / TIA 568, 8 lines.
- Construction: internal line 8 wires

Value®

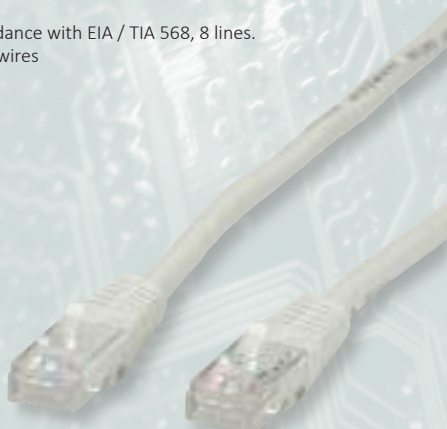

Order-No. – P.U.

VALUE UTP Patch Cord Cat.5e/Class D, grey, 0.5 m	21.99.0500	– 250
VALUE UTP Patch Cord Cat.5e/Class D, grey, 1.0 m	21.99.0501	– 200
VALUE UTP Patch Cord Cat.5e/Class D, grey, 2.0 m	21.99.0502	– 150
VALUE UTP Patch Cord Cat.5e/Class D, grey, 3.0 m	21.99.0503	– 100
VALUE UTP Patch Cord Cat.5e/Class D, grey, 5.0 m	21.99.0505	– 70
VALUE UTP Patch Cord Cat.5e/Class D, grey, 7.0 m	21.99.0507	– 50
VALUE UTP Patch Cord Cat.5e/Class D, grey, 10.0 m	21.99.0510	– 40
VALUE UTP Patch Cord Cat.5e/Class D, grey, 15.0 m	21.99.0515	– 25
VALUE UTP Patch Cord Cat.5e/Class D, grey, 20.0 m	21.99.0520	– 20

## VALUE FTP Patch Cord Cat.5e/Class D

Cat.5e  
Class D

F/UTP

- Prepared cable with screened RJ-45 plug on both ends (without coding) incl. kink protection.
- Connection cable for structured building cabling.
- Impedance: 100 Ohm.
- Contact settings 1:1 in accordance with EIA / TIA 568, 8 lines.
- Construction: Internal line 8 wires. Complete screening: aluminium laminated foil
- Colour: grey



Value®



Order-No. – P.U.

VALUE FTP Patch Cord Cat.5e/Class D, grey, 0.5 m	21.99.0100	– 250
VALUE FTP Patch Cord Cat.5e/Class D, grey, 1.0 m	21.99.0101	– 200
VALUE FTP Patch Cord Cat.5e/Class D, grey, 2.0 m	21.99.0102	– 150
VALUE FTP Patch Cord Cat.5e/Class D, grey, 3.0 m	21.99.0103	– 100
VALUE FTP Patch Cord Cat.5e/Class D, grey, 5.0 m	21.99.0105	– 70
VALUE FTP Patch Cord Cat.5e/Class D, grey, 7.0 m	21.99.0107	– 50
VALUE FTP Patch Cord Cat.5e/Class D, grey, 10.0 m	21.99.0110	– 40
VALUE FTP Patch Cord Cat.5e/Class D, grey, 15.0 m	21.99.0115	– 25
VALUE FTP Patch Cord Cat.5e/Class D, grey, 20.0 m	21.99.0120	– 20

## VALUE UTP Patch Cord, Cat.6 / Class E

Cat.6  
Class E

U/UTP

- Patch cable for networking connections between devices.
- Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends.
- Durable due to moulded kink protection.
- Flexible cable, suitable for narrow bending.
- Plugs with gold plated contacts.
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded wire.



For a structured cabling system we recommend to use the following components:

VALUE Cat.6 UTP Cable, Solid Wire, AWG24, 300 m: 21.99.0995.

VALUE Cat.6/Cl. D Flush/Surface Mount Wall Jack, unshielded, white:

25.99.8494/25.99.8394;

VALUE Cat.6/Cl. E 19" Patch Panel, 24 Ports, unshielded:

26.99.0351 (black), 26.99.0352 (grey);

VALUE Cat.6/Cl. E UTP Patch Cord, grey, 5 m: 21.99.0905.

Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class E specifications.

Value®



Length	grey	red	yellow	green	blue	black	white	– P.U.
0.5 m	21.99.0900	21.99.1521	21.99.1522	21.99.1523	21.99.1524	21.99.1525	21.99.1526	– 250
1 m	21.99.0901	21.99.1531	21.99.1532	21.99.1533	21.99.1534	21.99.1535	21.99.1536	– 200
1.5 m	21.99.0950	21.99.0951	21.99.0952	21.99.0953	21.99.0954	21.99.0955	21.99.0956	– 150
2 m	21.99.0902	21.99.1541	21.99.1542	21.99.1543	21.99.1544	21.99.1545	21.99.1546	– 150
3 m	21.99.0903	21.99.1551	21.99.1552	21.99.1553	21.99.1554	21.99.1555	21.99.1556	– 100
5 m	21.99.0905	21.99.1561	21.99.1562	21.99.1563	21.99.1564	21.99.1565	21.99.1566	– 70
7 m	21.99.0907	21.99.1571	21.99.1572	21.99.1573	21.99.1574	21.99.1575	21.99.1576	– 50
10 m	21.99.0910	21.99.1581	21.99.1582	21.99.1583	21.99.1584	21.99.1585	21.99.1586	– 40



## VALUE S/FTP (PiMF) Patch Cord, Cat.6 / Class E

Cat.6  
Class E

S/FTP

- Prepared shielded Twisted Pair cable with RJ-45 connectors on both sides. Used as patch cable in wiring cabinet or as direct connection cable between devices.
- Flexible cable suitable for narrow bending.
- Contact settings 1:1, according to EIA/TIA 568, 8 wires.
- Construction: 8 wires stranded copper wire, braid shield. Pairs shielded with aluminium clad polyester foil.
- Impedance: 100 Ohm

**For a structured cabling system we recommend to use the following components:**

ROLINE Cat.6 S/FTP Cable, Solid Wire, AWG23: 21.15.0890 (100 m), 21.15.0891 (300 m).

VALUE Cat.6/Cl. E Flush/Surface Mount Wall Jack, shielded, white: 25.99.8492/25.99.8392.

VALUE Cat.6/Cl. E 19" Patch Panel, 24 Ports, shielded: 26.99.0353 (black), 26.99.0354 (grey).

VALUE Cat.6/Cl. E S/FTP Patch Cord, grey, 5 m: 21.99.0805.

Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class E specifications.



Length	grey	red	yellow	green	blue	black	white	– P.U.
0.5 m	21.99.0800	21.99.1321	21.99.1322	21.99.1323	21.99.1324	21.99.1325	21.99.1326	– 250
1 m	21.99.0801	21.99.1331	21.99.1332	21.99.1333	21.99.1334	21.99.1335	21.99.1336	– 200
1.5 m	21.99.0811	21.99.0812	21.99.0813	21.99.0814	21.99.0815	21.99.0816	21.99.0817	– 150
2 m	21.99.0802	21.99.1341	21.99.1342	21.99.1343	21.99.1344	21.99.1345	21.99.1346	– 150
3 m	21.99.0803	21.99.1351	21.99.1352	21.99.1353	21.99.1354	21.99.1355	21.99.1356	– 100
5 m	21.99.0805	21.99.1361	21.99.1362	21.99.1363	21.99.1364	21.99.1365	21.99.1366	– 70
7 m	21.99.0807	21.99.1371	21.99.1372	21.99.1373	21.99.1374	21.99.1375	21.99.1376	– 50
10 m	21.99.0810	21.99.1381	21.99.1382	21.99.1383	21.99.1384	21.99.1385	21.99.1386	– 40

## ROLINE S/FTP (PiMF) Patch Cord Cat.6A, Component Level, LSOH

100% Component Level Tested

Cat.6A


S/FTP

- Patch cable for networking connections between devices.
- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends.
- Durable due to moulded kink protection.
- Flexible cable, suitable for narrow bending.
- High quality plugs with gold plated contacts.
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard.
- Construction: 4-pair stranded copper wire. Complete braid shielding.
- Pairs shielded with aluminium clad polyester foil.
- Halogen-free, flame retardant, low smoke.
- 100 % Component level testing

**roline**<sup>®</sup>  
Designed for Professionals



Halogenfree  
Flame retardant  
Low Smoke

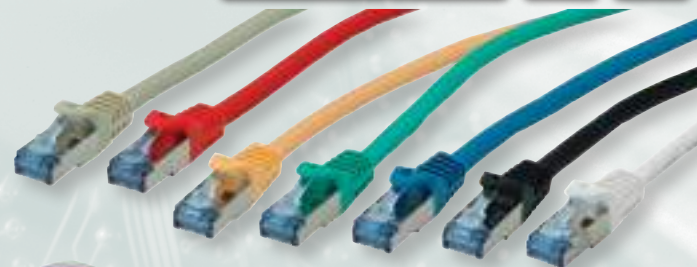

Length	grey	red	yellow	green	blue	black	white	P.U.
0.3m	21.15.2970	21.15.2971	21.15.2972	21.15.2973	21.15.2974	21.15.2975	21.15.2976	– 50
0.5m	21.15.2800	21.15.2810	21.15.2820	21.15.2830	21.15.2840	21.15.2850	21.15.2860	– 100
1m	21.15.2801	21.15.2811	21.15.2821	21.15.2831	21.15.2841	21.15.2851	21.15.2861	– 100
1.5m	21.15.2804	21.15.2814	21.15.2824	21.15.2834	21.15.2844	21.15.2854	21.15.2864	– 100
2m	21.15.2802	21.15.2812	21.15.2822	21.15.2832	21.15.2842	21.15.2852	21.15.2862	– 100
3m	21.15.2803	21.15.2813	21.15.2823	21.15.2833	21.15.2843	21.15.2853	21.15.2863	– 50
5m	21.15.2805	21.15.2815	21.15.2825	21.15.2835	21.15.2845	21.15.2855	21.15.2865	– 50
7.5m	21.15.2806	21.15.2816	21.15.2826	21.15.2836	21.15.2846	21.15.2856	21.15.2866	– 40
10m	21.15.2807	21.15.2817	21.15.2827	21.15.2837	21.15.2847	21.15.2857	21.15.2867	– 40
15m	21.15.2808	21.15.2818	21.15.2828	21.15.2838	21.15.2848	21.15.2858	21.15.2868	– 30
20m	21.15.2809	21.15.2819	21.15.2829	21.15.2839	21.15.2849	21.15.2859	21.15.2869	– 20



## [ Network Components

### VALUE RJ-45 Modular Couplers, Cat.6/Class E

- The couplers are available in 2 versions:
  - shielded with metal housing, colour: silver
  - unshielded with plastic housing, colour: black
- The couplers are able to extend Cat.6 cables
- All couplers with eight contacts, 1:1 connected



Value

Order-No. – P.U.

VALUE Cat.6/Class E Modular Coupler, UTP, black

A 21.99.3001 – 20

VALUE Cat.6/Class E Modular Coupler, STP, silver

B 21.99.3002 – 20

### ROLINE Cat.5e/6 /Class D/E Modular Couplers

- The ROLINE couplers are available in two versions:
  - shielded with metal housing to safe the signals against electrical and mag-netical interferences, colour: silver
  - unshielded with plastic housing, colour: white resp. black
- The couplers are able to extend Cat.5e resp. Cat.6 cables
- All couplers with eight contacts, 1:1 connected



roline  
Designed for Professionals

Order-No. – P.U.

ROLINE Cat.5e/Class D Modular Coupler, UTP, white

A 21.17.3001 – 20

ROLINE Cat.5e/Class D Modular Coupler, STP, silver

B 21.17.3002 – 20

ROLINE Cat.6/Class E Modular Coupler, UTP, black


C 21.17.3043 – 200

ROLINE Cat.6/Class E Modular Coupler, STP, silver

D 21.17.3041 – 200

### VALUE T-Adapters Cat.5e/Class D

- For the use with two 10/100 LAN connections over one (full wired) 8-wire cable
- Connection cable (17 cm) with RJ-45 plug; adapter with two RJ-45 jacks
- Pin assignment of connectors: pairs 1, 2 and 3, 6
- Wiring scheme on the adapter
- For Cat. 5e installations
- Note: The adapters can be used only pairwise**

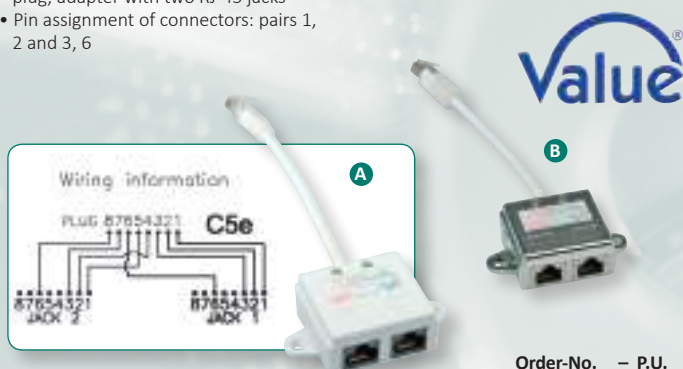

Order-No. – P.U.

VALUE T-Adapter Cat.5e/Class D, UTP, white

A 21.99.3045 – 50

VALUE T-Adapter Cat.5e/Class D, STP, silver

B 21.99.3050 – 50

### ROLINE Junction Boxes

The ROLINE junction box is used to re-pair or extend Cat.5e and Cat.6 cables.

- Four different types are available, two UTP types for the unshielded cable and two STP types for the shielded cable
- With this box all 4 or 8 wired installation cables with AWG24 and with a cover from 4 mm (UTP type) up to 6.2 mm (STP type) can be installed

- Equipped with the LSA connection technology, all cables in accordance with EIA/TIA 568 can be easily installed
- With the use of the STP type junction box, it's safe against electrical and magnetical interferences



roline  
Designed for Professionals

Order-No. – P.U.

ROLINE Junction Box Cat.5e, STP

21.17.3035 – 100

ROLINE Junction Box Cat.5e, UTP

21.17.3036 – 200

ROLINE Junction Box Cat.6 / Cl. E, STP

A 21.17.3065 – 20


ROLINE Junction Box Cat.6 / Cl. E, UTP

21.17.3066 – 20

### VALUE Cat.6 /6A Cl. E/Cl. EA 19" Patch Panel, 24 Ports STP

DATA CENTER  
Product

- The VALUE Cat.6/Class E 19" patch panels fulfil the Cat.6/Class E Permanent Link Standard and is ideal for Gigabit Ethernet networks
- Cable assembly takes place using LSA-plus piercing terminals with colour coding on the top in accordance with EIA/TIA 568
- Sheet steel housing and cover
- The VALUE Cat. 6A 19" patch panels fulfil the Cat. 6A/Class EA permanent link standard and are ideal for 10 Gigabit Ethernet networks
- Cable assembly takes place using LSA plus piercing terminals with colour coding on the top in accordance with EIA/TIA 568A
- Sheet steel housing and cover

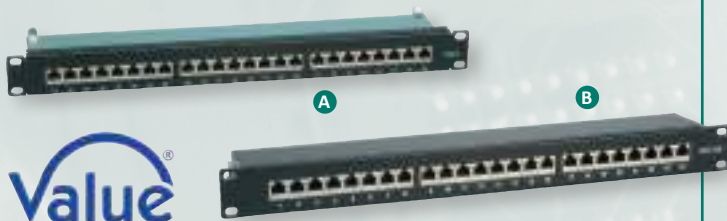

Order-No. – P.U.

VALUE Cat.6/Cl. E 19" Patch Panel, 24 Ports, STP, black

A 26.99.0353 – 5

VALUE Cat.6A / Cl. EA 19" Patch Panel, 24 Ports, STP, black

B 26.99.0360 – 5

### ROLINE Modular Plugs

- For Cat.5e/Cat.6 cabling systems
- Modular plugs shielded/unshielded
- 12.01.1087/1089, 21.17.3060/3061 for stranded wire
- 21.17.3062 for solid wire; with insert
- Package unit: 10 pieces



roline  
Designed for Professionals

Order-No. – P.U.

ROLINE Cat.5e/Cl D Modular Plug, 8p8c, UTP, for Stranded Wire, 10 pcs. 12.01.1087 – 100

ROLINE Cat.5e/Cl D Modular Plug, 8p8c, STP, for Stranded Wire, 10 pcs. 12.01.1089 – 100

ROLINE Cat.6/Cl. E Modular Plug, UTP, for Stranded Wire, 10 pcs. 21.17.3060 – 50

ROLINE Cat.6/Cl. E Modular Plug, STP, for Stranded Wire, 10 pcs. 21.17.3061 – 50

ROLINE Cat.6/Cl. E Modular Plug, UTP, for Solid Wire, 10 pcs. 21.17.3062 – 50

ROLINE Cat.6/Cl. E Modular Plug, STP, for Solid Wire, 10 pcs. 21.17.3063 – 50



## ROLINE Cat.6/Class E Keystone Jack, RJ-45, UTP, Tool-free

Tool-free

- The system is composed of a 19" patch panel frame and the UTP Cat.6 RJ-45 keystone jacks
- Assembling of cables and keystones takes place over LSA-plus or toolless
- Colour code on the keystone jacks, based on the standard EIA/TIA 568 A and 568 B


**For a structured unshielded Cat.6 cabling system we recommend to use the following components:**

ROLINE Cat.6 UTP Cable, Solid Wire, AWG23:  
21.15.0990 (100 m), 21.15.0991 (300 m)  
Flush Mount Wall Jack for Keystones, unloaded:  
25.16.8579  
ROLINE Cat.6 Keystone, RJ-45, unshielded:  
26.11.0352 (black), 26.11.0353 (white)

19" Keystone Patch Panel, 24 Ports, unshielded:  
26.11.0356 (light grey), 26.11.0357 (black)  
ROLINE Cat.6 UTP Patch Cord, grey, 5 m:  
21.15.0935  
Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class E specifications.

**roline**  
Designed for Professionals

	Order-No.	— P.U.
ROLINE Cat.6/Class E Keystone Jack, RJ-45, UTP, tool-free, black	26.11.0352	— 60
Keystone 19" Module frame Cat.5/Cat.6, 24 Ports, blank, UTP, black	26.11.0357	— 5
ROLINE Cat.6/Cl. E Keystone Jack, RJ-45, UTP, tool-free, white	26.11.0353	— 60
Keystone 19" Module frame Cat.5/Cat.6, 24 Ports, blank, UTP, light grey	26.11.0356	— 5

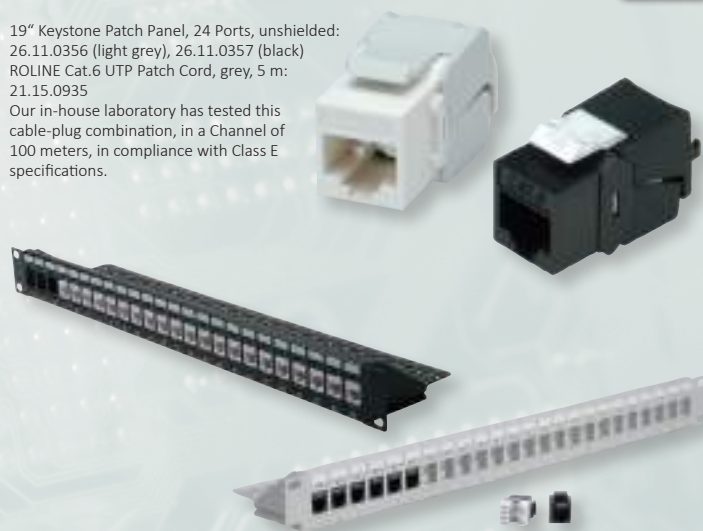

## ROLINE Cat.6/Class E Keystone Jack, RJ-45, STP, Tool-free

Tool-free

- The ROLINE Cat. 6/Class E 19" keystone patch panel system is composed of a 19" STP patch panel frame (please order separately!) and these shielded Cat.6 RJ-45 keystone jacks
- Colour code on the keystone jacks based on the standard EIA/TIA 568
- Colour: silver

**For a structured shielded Cat.6 cabling system we recommend to use the following components:**

ROLINE Cat.6 S/FTP Cable, Solid Wire, AWG23:  
21.15.0890 (100 m), 21.15.0891 (300 m)  
ROLINE Flush Mount Wall Jack for Keystones, unloaded: 25.16.8579  
ROLINE Cat.6 Keystone, RJ-45, shielded:  
26.11.0358  
ROLINE Cat.6 19" Keystone Patch Panel, 24 ports, shielded: 26.11.0359 (light grey),

26.11.0360 (black)  
ROLINE Cat.6 S/FTP Patch Cord, grey, 5 m:  
21.15.0835  
Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class E specification.

**roline**  
Designed for Professionals

	Order-No.	— P.U.
ROLINE Cat.6/Class E Keystone Jack, RJ-45, STP, tool-free, silver	26.11.0358	— 60
Keystone 19" Module frame Cat.5/6/6A, 24 Ports, STP, black	26.11.0360	— 5
Keystone 19" Module frame Cat.5/6/6A, 24 Ports, STP, light grey	26.11.0359	— 5



## VALUE Cat.6A Keystone, RJ-45, STP, Tool-free

Tool-free

**The low-cost solution for Cat 6A cabling for data rates up to 10Gbit/s!**


Cat.6/Class E Keystone jack for installation in a Keystone blank 19" patch panel module frame.

- Connect the cable to the Keystones on modified LSA connections

- Toolless mounting- without using a LSA tool: cable wires are simply placed into the guides of Keystone module, the module is closed and compressed- the connection is ready for use
- Colour code on the Keystone jacks based on the standard EIA/TIA 568 A & B
- Colour: silver

**Value**

	Order-No.	— P.U.
VALUE Cat.6A/Class EA Keystone, RJ-45, STP, tool-free, silver	26.99.0366	— 40
Keystone 19" Module frame Cat.5/Cat.6/Cat.6A, 24 Ports, STP, black	26.11.0360	— 5
Keystone 19" Module frame Cat.5/Cat.6/Cat.6A, 24 Ports, STP, light grey	26.11.0359	— 5

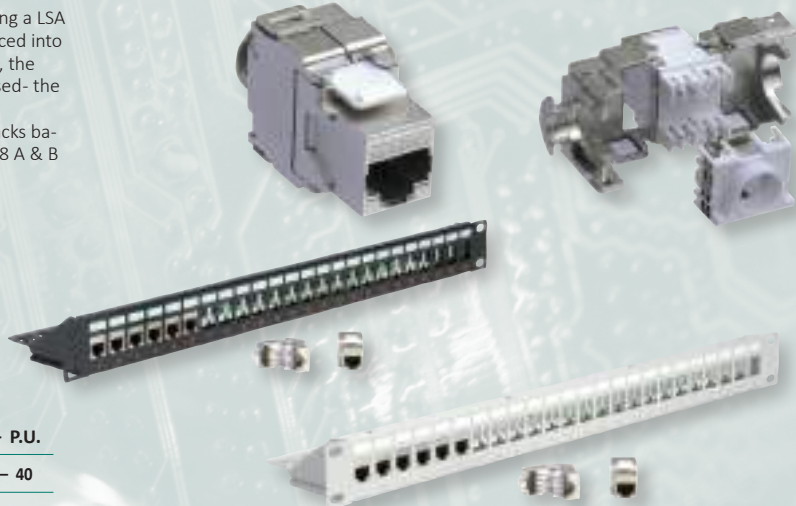



# [ Network Components / Cables

## VALUE Fibre Optic Jumper Cables, 50/125 µm, OM4

OM4 fiber for existing 1 and 10 Gbit/s applications as well as future 40 and 100 Gbit/s systems. Allows extended reach upwards of 550 meters at 10 Gbit/s for ultra long building backbones and medium length campus backbones. With an laser bandwidth

of 4700 MHz– km (more than double the IEEE requirement for 10 Gbit/s 300 meter support), the OM4 fiber is also especially well suited for shorter distances in data centers and high performance computing applications.

- VALUE OM4 Fibre Optic Jumper cable with fiber type 50/125 µm
- Color: purple



Length	Type LC/LC	– P.U.	Type LC/ST	– P.U.	Type LC/SC	– P.U.
0.5 m	21.99.8750	– 10	21.99.8770	– 10	21.99.8760	– 10
1 m	21.99.8751	– 10	21.99.8771	– 10	21.99.8761	– 10
2 m	21.99.8752	– 10	21.99.8772	– 10	21.99.8762	– 10
3 m	21.99.8753	– 5	21.99.8773	– 5	21.99.8763	– 5
5 m	21.99.8755	– 5	21.99.8775	– 5	21.99.8765	– 5
10 m	21.99.8758	– 5	21.99.8778	– 5	21.99.8768	– 5
15 m	21.99.8756	– 5				
20 m	21.99.8757	– 5				



## ROLINE Fibre Optic Jumper Cables, 50/125 µm, OM4


OM4 fiber for existing 1 and 10 Gbit/s applications as well as future 40 and 100 Gbit/s systems. Allows extended reach upwards of 550 meters at 10 Gbit/s for ultra long building backbones and medium length campus backbones. With an laser bandwidth

of 4700 MHz– km (more than double the IEEE requirement for 10 Gbit/s 300 meter support), the OM4 fiber is also especially well suited for shorter distances in data centers and high performance computing applications.

- ROLINE OM4 Fibre Optic Jumper cable with fiber type 50/125 µm
- Color: purple



Length	Type LC/LC	– P.U.	Type LC/ST	– P.U.	Type LC/SC	– P.U.
0.5 m	21.15.8750	– 10	21.15.8770	– 10	21.15.8760	– 10
1 m	21.15.8751	– 10	21.15.8771	– 10	21.15.8761	– 10
2 m	21.15.8752	– 10	21.15.8772	– 10	21.15.8762	– 10
3 m	21.15.8753	– 5	21.15.8773	– 5	21.15.8763	– 5
5 m	21.15.8755	– 5	21.15.8775	– 5	21.15.8765	– 5
10 m	21.15.8758	– 5	21.15.8778	– 5	21.15.8768	– 5
15 m	21.15.8756	– 5				
20 m	21.15.8757	– 5				

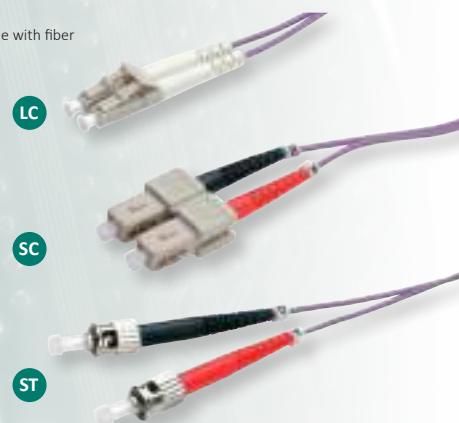


## ROLINE Fibre Optic Jumper Cables, 50/125µm OM4, Low-Loss-Connector

**Security for the future! The OM4 fiber and connector quality with very low insertion ensure an excellent quality at very high bandwidths.**  
 • It supports 10 Gb/s Ethernet, Fibre Channel, and OIF applications to 550 meters, extends the system cost benefits to ultra long building backbones and medium length campus backbones.

- The cable assembled with „low– loss“ connectors achieve very good values for insertion loss and reflection. In comparison:  
 – Typical attenuation of a standard LC connector: 0.5 dB  
 – Typical attenuation of a low– loss LC connector: 0.15 dB

- Modal Bandwidth: 4700 MHz– km (this bandwidth is based on application– specific implementation of the EMBC requirements)
- Duplex cables with fiber type Multi– mode 50/125µm, OM4

	Order-No.	– P.U.
ROLINE FO Jumper Cable 50/125µm OM4, LC/LC, Low–Loss–Connector, violet, 0.5 m	21.15.8850	– 3
ROLINE FO Jumper Cable 50/125µm OM4, LC/LC, Low–Loss–Connector, violet, 1.0 m	21.15.8851	– 3
ROLINE FO Jumper Cable 50/125µm OM4, LC/LC, Low–Loss–Connector, violet, 2.0 m	21.15.8852	– 3
ROLINE FO Jumper Cable 50/125µm OM4, LC/LC, Low–Loss–Connector, violet, 3.0 m	21.15.8853	– 3
ROLINE FO Jumper Cable 50/125µm OM4, LC/LC, Low–Loss–Connector, violet, 5.0 m	21.15.8855	– 3
ROLINE FO Jumper Cable 50/125µm OM4, LC/LC, Low–Loss–Connector, violet, 7.0 m	21.15.8856	– 3
ROLINE FO Jumper Cable 50/125µm OM4, LC/LC, Low–Loss–Connector, violet, 10 m	21.15.8858	– 3
ROLINE FO Jumper Cable 50/125µm OM4, LC/LC, Low–Loss–Connector, violet, 15 m	21.15.8859	– 5
ROLINE FO Jumper Cable 50/125µm OM4, LC/LC, Low–Loss–Connector, violet, 20 m	21.15.8860	– 5

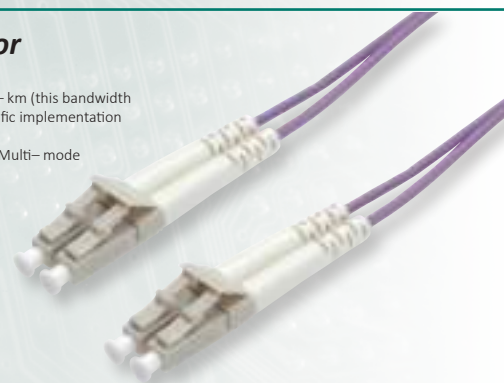


Halogenfree  
Flame retardant  
Low Smoke



## ROLINE KVM Switch, 1 User - 2/4 PCs, DisplayPort, with USB Hub

- Control 2/4 computers from a single USB console (DisplayPort monitor, USB mouse and keyboard)
- Supports DisplayPort with a resolution up to 2560 x 1600
- Integrated 2-port USB 2.0 hub allows 2/4 computers to share a USB device
- Front panel push button or hot-key function for easy computer selection
- No software required
- Supports Windows
- Contents: KVM switch, power supply, manual

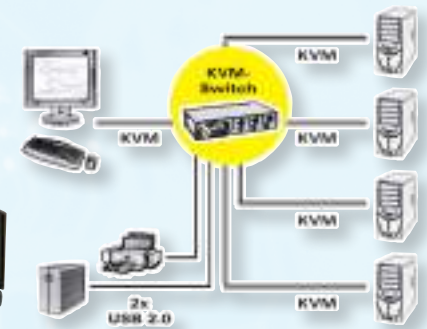

**roline**  
Designed for Professionals



### Technical data:

Monitor connection:

Keyboard/mouse connection:

PC monitor connection:

PC keyboard/mouse connection:

Dimensions (WxDxH):

Max. resolution (nominal)

Dimensions (HxWxD)

14.01.3327

1x DP F

2x USB type B F

2x DP F

2x USB type B F

40 x 125 x 70 mm

1920 x 1200

40 x 125 x 70 mm

14.01.3329

1x DP F

2x USB type B F

4x DP F

4x USB type B F

44 x 220 x 130 mm

1920 x 1200

44 x 220 x 130 mm

	Order-No.	—	P.U.
ROLINE KVM Switch, 1 User - 2 PCs, DisplayPort, with USB Hub	14.01.3327	—	4
ROLINE KVM Switch, 1 User - 4 PCs, DisplayPort, with USB Hub	14.01.3329	—	1

## ROLINE Smart KVM Extender, VGA, USB

### Smart combination of KVM Extender, KVM Switch and PC Share

- Remotely locates the keyboard, mouse and monitor up to 150 m away from a computer
- Connection of the Computer Unit and Station Unit via Cat. 5e TP cable
- Supports USB consoles
- Video compensation can be adjusted by hot key to ensure the optimum signal quality for any length of cable within the limit
- Locates the computer away from your desk and work area, saving you valuable space
- Allows two users to share one computer both in local and remote areas
- Beeps confirmation for key control makes the operation easier and cross-checked
- Easy installation
- Supports standard USB keyboards and mice
- Compatible with XGA, VGA and SVGA system
- Contents: Local unit with power supply unit, remote unit, manual

**Example of use:** ROLINE KVM extension for remote operation of a workplace. The system provides a local, and a remote unit to connect another console. This can be operated via a Cat5 cable with remote VGA and USB control unit. Up to 150 m away from the PC, the console can be placed in convenient access while the PC is installed themselves in a safe environment.



**roline**  
Designed for Professionals

### Technical Data:

Max resolution (nominal):

Cable type:

Cable length:

Power supply for local unit:

Dimensions (each WxDxH):

Connections:

Monitor:

Mouse/keyboard:

PC connection:

14.01.3249

1024 x 768

Cat.5e TP cable

up 150 m

9V DC, 600mA

156 x 65 x 20 mm

Local Unit

1x HD15 F

1x USB F

1x SPHD15 F

(depends on cable length)  
(recommended:  
solid wire AWG24)

Remote Unit

1x HD15 F

1x USB F

1x SPHD15 F

	Order-No.	—	P.U.
ROLINE Smart KVM Extender, VGA, USB	14.01.3249	—	6

## ROLINE USB 3.2 Gen 1 Hub

### This hub can connect up to four USB devices with SuperSpeed

- Data transfer rates of up to 5 Gbit/s
- Fully backwards compatible with USB 2.0, USB 1.1
- PC connection: 1x USB 3 Type B
- Input: 4 USB 3 Type A SuperSpeed ports
- LED status indicator for each port
- Hot-swappable
- Colour: Black
- Contents: Hub, power supply, USB cable



**roline**  
Designed for Professionals

### Technical data:

PC connection:

Input:

Dimensions (HxWxD):

Power supply:

1x USB 3 Type B

4x USB 3 Type A

24 x 95 x 55 mm

5V 4A

Order-No. — P.U.

ROLINE USB 3.2 Gen 1 Hub, 4 Ports, with Power Supply

14.02.5015 — 10





# [ Computer Cables / Connectors / Adapters

## VALUE USB 2.0 Cables

- High quality USB cable with different types of USB connector
- For the connection of devices with USB connector; e.g. digital cameras, mobile phones, MP3 players or PDAs
- Meets standard USB 2.0 (transfer rate up to 480 Mbit/s)
- Colour: white
- Type: A-B, A-A
- Colour: white



**Value**

Order-No. – P.U.

VALUE USB 2.0 Cable, A - B, M/M, white, 0.8 m	11.99.8809	– 50
VALUE USB 2.0 Cable, A - B, M/M, white, 1.8 m	11.99.8819	– 100
VALUE USB 2.0 Cable, A - B, M/M, white, 3.0 m	11.99.8831	– 100
VALUE USB 2.0 Cable, A - B, M/M, white, 4.5 m	11.99.8841	– 100
VALUE USB 2.0 Cable, A - A, M/M, white, 0.8 m	11.99.8909	– 50
VALUE USB 2.0 Cable, A - A, M/M, white, 1.8 m	11.99.8919	– 100
VALUE USB 2.0 Cable, A - A, M/M, white, 3.0 m	11.99.8931	– 100
VALUE USB 2.0 Cable, A - A, M/M, white, 4.5 m	11.99.8944	– 100
VALUE USB 2.0 Cable, A - A, M/F, white, 0.8 m	11.99.8946	– 50
VALUE USB 2.0 Cable, A - A, M/F, white, 1.8 m	11.99.8949	– 100
VALUE USB 2.0 Cable, A - A, M/F, white, 3.0 m	11.99.8961	– 100

## ROLINE USB 2.0 Cables

High quality USB cable with one USB Type A and one USB Type B connector.

- Improved shielding
- For the connection of devices with USB Type B connector; e.g. printer
- Meets standard USB 2.0 (transfer rate up to 480 Mbit/s)
- Type: A-B, A-A
- Colour: black



**roline**  
Designed for Professionals

Order-No. – P.U.

ROLINE USB 2.0 Cable, A - B, M/M, black, 0.8 m	11.02.8808	– 50
ROLINE USB 2.0 Cable, A - B, M/M, black, 1.8 m	11.02.8818	– 100
ROLINE USB 2.0 Cable, A - B, M/M, black, 3.0 m	11.02.8830	– 100
ROLINE USB 2.0 Cable, A - B, M/M, black, 4.5 m	11.02.8845	– 100
ROLINE USB 2.0 Cable, A - A, M/M, black, 0.8 m	11.02.8908	– 50
ROLINE USB 2.0 Cable, A - A, M/M, black, 1.8 m	11.02.8918	– 100
ROLINE USB 2.0 Cable, A - A, M/M, black, 3.0 m	11.02.8930	– 100
ROLINE USB 2.0 Cable, A - A, M/M, black, 4.5 m	11.02.8945	– 100
ROLINE USB 2.0 Cable, A - A, M/F, black, 0.8 m	11.02.8947	– 50
ROLINE USB 2.0 Cable, A - A, M/F, black, 1.8 m	11.02.8948	– 100
ROLINE USB 2.0 Cable, A - A, M/F, black, 3.0 m	11.02.8960	– 100

## VALUE USB 2.0 Cables, A - Micro B

- USB Cable with one Type A and one Micro B USB Connector
- Meets standard USB 2.0 (transfer rate up to 480 Mbit/s)
- Colour: white



**Value**

Order-No. – P.U.

VALUE USB 2.0 Cable, A - Micro B, M/M, 0.15 m	11.99.8751	– 50
VALUE USB 2.0 Cable, A - Micro B, M/M, 0.8 m	11.99.8754	– 10
VALUE USB 2.0 Cable, A - Micro B, M/M, 1.8 m	11.99.8752	– 10
VALUE USB 2.0 Cable, A - Micro B, M/M, 3.0m	11.99.8755	– 10

## ROLINE USB 2.0 Cables, A - Micro B

High quality USB cable with one Type A and one Micro USB connector.

- Improved shielding
- For the connection of devices with Micro USB connector; e.g. digital cameras / DSLRs or mobile phones / smartphones
- Meets standard USB 2.0 (transfer rate up to 480 Mbit/s)
- Colour: black



Order-No. – P.U.

ROLINE USB 2.0 Cable, A - Micro B, M/M, 0.15 m	11.02.8310	– 25
ROLINE USB 2.0 Cable, A - Micro B, M/M, 0.8 m	11.02.8754	– 10
ROLINE USB 2.0 Cable, A - Micro B, M/M, 1.8 m	11.02.8752	– 10
ROLINE USB 2.0 Cable, A - Micro B, M/M, 3.0 m	11.02.8755	– 10
ROLINE USB 2.0 Cable, Micro A - Micro B, M/M, 1.8 m	11.02.8753	– 10

## ROLINE USB 2.0 Cables, A - 5-Pin Mini

- USB cable with one Type A and one USB 5-pin Mini connector
- Meets standard USB 2.0 (transfer rate up to 480 Mbit/s)
- Colour: black



**roline**  
Designed for Professionals

Order-No. – P.U.

ROLINE USB 2.0 Cable, A - 5-Pin Mini, M/M, black, 1.8 m	11.02.8719	– 20
---	------------	------

## ROLINE Lightning to USB Cable for iPhone, iPod, iPad

- Using 8 pins instead of 30, Lightning is significantly more compact than the 30-pin dock connector and can be inserted with either side facing up
- For the connection of devices like the iPhone on from the iPhone 5 that introduced the Lightning connector, as well as for iPods and iPads on from that generation
- High quality USB cable with one Type A (male) and one Lightning connector
- Improved shielding
- Meets standard USB 2.0 (transfer rate up to 480 Mbit/s)
- Colour: white



**roline**  
Designed for Professionals

Apple iPhone | iPad | iPod

Order-No. – P.U.

ROLINE Lightning to USB Cable for iPhone, iPod, iPad, white, 0.15 m	11.02.8326	– 20
ROLINE Lightning to USB Cable for iPhone, iPod, iPad, white, 1.0 m	11.02.8321	– 20
ROLINE Lightning to USB Cable for iPhone, iPod, iPad, white, 1.8 m	11.02.8322	– 20



## ROLINE USB 3.2 Gen 1 Cables, PD (Power Delivery)

The new SuperSpeed specification adds a 5 Gbit/s speed mode that uses a more efficient data encoding and will deliver more than twice the effective data through-put performance of existing SuperSpeed USB over enhanced, fully backward compatible USB connectors and cables.

- High quality cable with improved shielding
- With the new reversible Type C connectors at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Suitable for data transfer rates of up to 5 Gbit/s
- Supports USB Power Delivery to 20V / 5A

**roline**  
Designed for Professionals



Order-No. – P.U.

ROLINE USB 3.2 Gen 1 Cable, A-C, M/M, black, 0.5 m	11.02.9010	– 20
ROLINE USB 3.2 Gen 1 Cable, A-C, M/M, black, 1.0 m	11.02.9011	– 10

## VALUE Cableadapter, USB3.2 Gen 1, C-A, OTG

- High quality USB 3.2 Gen 1 cable with one Type A (female) and one Type C USB connector (male)
- Meets standard USB3.1 (transfer rate up to 10 Gbit/s)
- Colour: black



**Value**  
Designed for Professionals

Order-No. – P.U.

VALUE Cableadapter, USB3.2 Gen 1, C-A, M/F, OTG, black, 0.15 m	11.99.9030	– 25
--	------------	------

## ROLINE USB 2.0 Extension Cables

- Supports USB 2.0
- The cable extends the distance of a USB 2.0 device by 5 m
- The cable acts as a single port hub, which means that multiple cables can be cascaded to increase the distance between your computer and USB 2.0 devices
- Meets USB 2.0 specifications and works with low-speed, high-speed and full-speed devices
- Hot-pluggable
- Contents: Cable

**roline**  
Designed for Professionals



Order-No. – P.U.

ROLINE USB 2.0 Extension Cable, 1 Port, white, 5.0 m	A 12.04.1088	– 10
ROLINE USB 2.0 Extension Cable, 1 Port, black, 5.0 m	B 12.04.1089	– 10

## ROLINE USB 3.2 Gen 1 Active Repeater Cable

Extends the connection distance of an external HDD, hub, printer, scanner or other USB 3.1 Gen 1 device to your computer by 5 meters.

- Active USB extension cable- ensures good signal quality
- Compliant with SuperSpeed USB 3.0, USB 2.0, USB 1.1
- Supports data rates up to 5 Gbit/s
- Plug & play
- Supported Operating Systems: Windows 2000/XP/Vista/7, Mac OS
- Contents: USB 3.1 Gen 1 Active repeater cable



**roline**  
Designed for Professionals




Order-No. – P.U.

ROLINE USB 3.2 Gen 1 Active Repeater Cable, black, 5.0 m	12.04.1096	– 8
--	------------	-----

## ROLINE USB 3.2 Gen 1 SuperSpeed Cables

A new major feature of USB 3.1 Gen 1 is SuperSpeed bus, which increases the maximum transfer rate to 5.0 Gbit/s. USB 3.1 Gen 1 receptacles are compatible with USB 2.0 device plugs for the respective physical form factors. The cables can be used with PCs with the actual Type A F. Color: black

**roline**  
Designed for Professionals

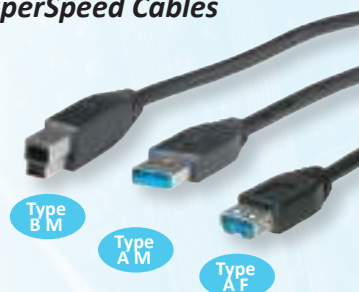

Order-No. – P.U.

ROLINE USB 3.2 Gen 1 Cable, A - B, M/M, 0.8 m	11.02.8869	– 10
ROLINE USB 3.2 Gen 1 Cable, A - B, M/M, 1.8 m	11.02.8870	– 50
ROLINE USB 3.2 Gen 1 Cable, A - B, M/M, 3.0 m	11.02.8871	– 50
ROLINE USB 3.2 Gen 1 Cable, A - A, M/M, 1.8 m	11.02.8970	– 50
ROLINE USB 3.2 Gen 1 Cable, A - A, M/M, 3.0 m	11.02.8971	– 50
ROLINE USB 3.2 Gen 1 Cable, A - A, M/F, 0.8 m	11.02.8977	– 50
ROLINE USB 3.2 Gen 1 Cable, A - A, M/F, 1.8 m	11.02.8978	– 50

## ROLINE USB 3.2 Gen 2 Cable, PD (Power Delivery) 20V5A, with Emark, C-C

Full-featured USB 3.2 Gen 2 cable, including TID and with a data transmission rate of up to 10 Gbit/s and full Power Delivery support of up to 20V 5A!

- High quality cable with improved shielding
- With the new reversible Type C connectors at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Suitable for data transfer rates of up to 10 Gbit/s
- Supports USB Power Delivery to 20V / 5A



**roline**  
Designed for Professionals

Order-No. – P.U.

ROLINE USB 3.2 Gen 2 Cable, PD 20V5A, with Emark, C-C, 0.5 m	11.02.9052	– 20
ROLINE USB 3.2 Gen 2 Cable, PD 20V5A, with Emark, C-C, 1.0 m	11.02.9053	– 10



# [ Computer Cables / Connectors / Adapters ]

## ROLINE USB 3.2 Gen 1 Active Repeater Cables

**Active USB 3.0 / USB 3.2 Gen 1 extension cable - for data rates up to 5 Gbit/s over a distance of 20m!**

- Active USB extension cable- ensures good signal quality
- Compliant with SuperSpeed USB 3.2 Gen 1, USB 2.0, USB 1.1
- Supports data rates up to 5 Gbit/s
- Plug & play

Order-No. – P.U.

ROLINE USB 3.2 Gen 1 Active Repeater Cable, black, 10 m	12.04.1070	– 5
ROLINE USB 3.2 Gen 1 Active Repeater Cable, black, 15 m	12.04.1071	– 5
ROLINE USB 3.2 Gen 1 Active Repeater Cable, black, 20 m	12.04.1072	– 5

- Supported Operating Systems:  
Windows 2000/XP/Vista/7/8,  
Mac OS
- Contents: USB 3.2 Gen 1 Active  
repeater cable

**roline®**  
Designed for Professionals



## ROLINE USB 2.0 Extender over RJ-45, max. 50m

- Extend your USB port over RJ-45 (up to 50 meters)
- For example to connect a USB printer in another room with your PC
- Supports USB 2.0, downwards compatible with USB 1.1/1.0
- Hot plug
- No additional software for extender required
- Connection via Cat.5e/Cat. 6 Twisted Pair cable
- Supports data rates up to 480Mbit/s

Order-No. – P.U.

ROLINE USB 2.0 Extender over RJ-45, max. 50m	A 12.04.1100	– 5
ROLINE USB 2.0 Extender over RJ-45, PoC, 1x USB, max. 50m	B 12.04.1102	– 4
ROLINE USB 2.0 Extender over RJ-45, PoC, 4x USB, max. 50m	C 12.04.1101	– 4

**roline®**  
Designed for Professionals



## VALUE / ROLINE DVI Cables, DVI (24+1), Dual Link / DVI (18+1) - HDMI

- DVI is the standard for the digital transmission between graphic card and digital monitor (e.g. TFT)
- Advantage: No quality loss during digital/analog conversion
- Colour: black

**Value®**  
**roline®**  
Designed for Professionals



Order-No. – P.U.

VALUE Monitor DVI Cable, DVI (24+1), Dual Link, M/M, 2.0 m	11.99.5525	– 25
VALUE Monitor DVI Cable, DVI (24+1), Dual Link, M/M, 3.0 m	11.99.5535	– 20
ROLINE Monitor DVI Cable, DVI (24+1), Dual Link, M/M, 2.0 m	11.04.5525	– 25
ROLINE Monitor DVI Cable, DVI (24+1), Dual Link, M/M, 3.0 m	11.04.5535	– 20

**2K** **1080p**  
FULL HD

Order-No. – P.U.

VALUE DVI Cable, DVI (18+1) - HDMI, M/M, black, 2 m	11.99.5522	– 20
VALUE DVI Cable, DVI (18+1) - HDMI, M/M, black, 3 m	11.99.5532	– 20
ROLINE DVI Cable, DVI (18+1) - HDMI, M/M, black, 2 m	11.04.5522	– 20
ROLINE DVI Cable, DVI (18+1) - HDMI, M/M, black, 3 m	11.04.5532	– 20

## HDMI High Speed Cables

**2K** **3D** **1080p**  
capable FULL HD

- HDMI supports standard, enhanced, or high-definition video, plus multi-channel digital audio on a single cable. It transmits all ATSC HDTV standards and supports 8-channel digital audio, with bandwidth to spare to accommodate future enhancements and requirements.
- Maximum resolution: 1920x1080 @60Hz
- HDMI High Speed increases single-link bandwidth to 340 MHz (10.2 Gbit/s)

**Value®**  
**roline®**  
Designed for Professionals



Order-No. – P.U.

VALUE HDMI High Speed Cable, M/M, black, 1 m	11.99.5526	– 20
VALUE HDMI High Speed Cable, M/M, black, 2 m	11.99.5527	– 20
VALUE HDMI High Speed Cable, M/M, black, 3 m	11.99.5537	– 20
VALUE HDMI High Speed Cable, M/M, black, 5 m	11.99.5557	– 10
VALUE HDMI High Speed Cable, M/M, black, 10 m	11.99.5558	– 10
VALUE HDMI High Speed Cable, M/M, black, 15 m	11.99.5534	– 5
VALUE HDMI High Speed Cable, M/M, black, 20 m	11.99.5536	– 5
Order-No. – P.U.		
ROLINE HDMI High Speed Cable, M/M, 1 m	11.04.5571	– 20
ROLINE HDMI High Speed Cable, M/M, 2 m	11.04.5572	– 20
ROLINE HDMI High Speed Cable, M/M, 3 m	11.04.5573	– 20
ROLINE HDMI High Speed Cable, M/M, 5 m	11.04.5575	– 10
ROLINE HDMI High Speed Cable, M/M, 10 m	11.04.5576	– 5
ROLINE HDMI High Speed Cable, M/M, 15 m	11.04.5577	– 5
ROLINE HDMI High Speed Cable, M/M, 20 m	11.04.5578	– 5

## ROLINE HDMI High Speed Cables + Ethernet

**4K** **3D** **1080p**  
capable FULL HD

**ROLINE HDMI High Speed Cables with Ethernet - offering even more HDTV features, at a resolution of up to 3840x2160 @30Hz!**

- HDMI Ethernet Channel
- Audio Return Channel
- 3D- Defines input/output protocols for major 3D video formats
- Quality cable with improved shielding
- Colour: black/white
- Cable with HDMI male connector on both sides

- NOTE\*: length > 5m support only  
max. resolution of 1920 x 1080 @60Hz

**roline®**  
Designed for Professionals

Order-No. – P.U.

ROLINE HDMI High Speed Cable + Ethernet, M/M, black, 1.0 m	11.04.5541	– 10
ROLINE HDMI High Speed Cable + Ethernet, M/M, black, 2.0 m	11.04.5542	– 10
ROLINE HDMI High Speed Cable + Ethernet, M/M, black, 3.0 m	11.04.5543	– 10
ROLINE HDMI High Speed Cable + Ethernet, M/M, black, 5.0 m	11.04.5545	– 10
*ROLINE HDMI High Speed Cable + Ethernet, M/M, black, 7.5 m	11.04.5544	– 10
*ROLINE HDMI High Speed Cable + Ethernet, M/M, black, 10.0 m	11.04.5547	– 5
*ROLINE HDMI High Speed Cable + Ethernet, M/M, black, 15.0 m	11.04.5548	– 5
*ROLINE HDMI High Speed Cable + Ethernet, M/M, black, 20.0 m	11.04.5549	– 5





## ROLINE HDMI Ultra HD Cables + Ethernet



High-quality HDMI connection cable with HDMI connectors for optimal transmission of digital HDTV signals at data rates up to 18 Gbit/s (600MHz). For the transmission of films in digital cinema-quality, with a resolution of up to 3840x2160 @60Hz!

- HDMI Ethernet Channel- Adds high-speed networking to an HDMI link, allowing users to take full advantage of their IP-enabled devices without a separate ethernet cable
- Audio Return Channel- Allows an HDMI-connected TV with a built-in tuner

- to send audio data „upstream“ to a surround audio system, eliminating the need for a separate audio cable
- 3D- Defines input/output protocols for major 3D video formats
- High quality cable with golden metal connector housing and shell for better shielding
- Gold plated contacts for higher durability



**roline**  
Designed for Professionals

	Order-No.	- P.U.
ROLINE HDMI Ultra HD Cable + Ethernet, M/M, black, 1 m	11.04.5680	- 10
ROLINE HDMI Ultra HD Cable + Ethernet, M/M, black, 1.5 m	11.04.5688	- 10
ROLINE HDMI Ultra HD Cable + Ethernet, M/M, black, 2 m	11.04.5681	- 10
ROLINE HDMI Ultra HD Cable + Ethernet, M/M, black, 3 m	11.04.5682	- 10
ROLINE HDMI Ultra HD Cable + Ethernet, M/M, black, 5 m	11.04.5683	- 10
ROLINE HDMI Ultra HD Cable + Ethernet, M/M, black, 7.5 m	11.04.5684	- 10

Max. Resolution: 3840 x 2160@30Hz



ROLINE HDMI Ultra HD Cable + Ethernet, M/M, black, 10 m	11.04.5685	- 10
ROLINE HDMI Ultra HD Cable + Ethernet, M/M, black, 15 m	11.04.5686	- 10
ROLINE HDMI Ultra HD Cable + Ethernet, M/M, black, 20 m	11.04.5687	- 10

## VALUE / ROLINE DisplayPort Cables, DP-DP



VALUE /ROLINE DisplayPort Cable with DP connection on both sides for connecting an Ultrabook, Notebook/ Laptop or PC to a monitor, TV or projector - for screen transmissions in excellent quality with resolutions of up to 3840x2160 @60Hz!

- DisplayPort is a universal connection standard for the transmission of picture and sound signals. Applications include mainly the connection of monitors and televisions to computers, BluRay players and similar devices.
- The connector requires less space and is therefore more suitable for portable display devices (ultrabooks, notebooks/laptops) or for 2 connectors on a graphics card (on a slot plate).
- The practical plug design prevents the cable from slipping out of the DisplayPort socket.
- Compliant DP v1.2 (max. 3840 x 2160 @60Hz)

**roline**  
Designed for Professionals

**Value**

	Order-No.	- P.U.
VALUE DisplayPort Cable, DP-DP, M/M, black, 1.0 m	11.99.5601	- 20
VALUE DisplayPort Cable, DP-DP, M/M, black, 1.5 m	11.99.5629	- 20
VALUE DisplayPort Cable, DP-DP, M/M, black, 2.0 m	11.99.5602	- 10
VALUE DisplayPort Cable, DP-DP, M/M, black, 3.0 m	11.99.5603	- 10
VALUE DisplayPort Cable, DP-DP, M/M, black, 5.0 m	11.99.5605	- 10

	Order-No.	- P.U.
ROLINE DisplayPort Cable, DP-DP, M/M, black, 1.0 m	11.04.5601	- 20
ROLINE DisplayPort Cable, DP-DP, M/M, black, 1.5 m	11.04.5629	- 20
ROLINE DisplayPort Cable, DP-DP, M/M, black, 2.0 m	11.04.5602	- 20
ROLINE DisplayPort Cable, DP-DP, M/M, black, 3.0 m	11.04.5603	- 20
ROLINE DisplayPort Cable, DP-DP, M/M, black, 5.0 m	11.04.5605	- 10

## ROLINE/ VALUE DisplayPort Cable, DP-DVI (24+1)



Connect your graphics card to a monitor with DVI connection via DisplayPort - with a maximum resolution of up to 1920x1080 @60Hz!

- DVI is the standard for digital video transmission in the computer sector.
- Display Port is the new standard for digital audio/ video transmission in the TV and multimedia sector, e. g. for connecting a monitor with DVI interface to a graphic card with DisplayPort connection. The DisplayPort is signal compatible to DVI.
- Cable with one DisplayPort connector and one DVI connector
- Compliant DP v1.1 (max. 1920 x 1080 / 1920 x 1200 @60Hz)

**Remark: The DisplayPort to DVI cable is only working in one direction: the DisplayPort plug has to be connected to the source device (e.g. graphic card)**

**roline**  
Designed for Professionals



**Value**

	Order-No.	- P.U.
VALUE DisplayPort Cable, DP-DVI (24+1), M/M, black, 1.0 m	11.99.5613	- 10
VALUE DisplayPort Cable, DP-DVI (24+1), M/M, black, 1.5 m	11.99.5619	- 10
VALUE DisplayPort Cable, DP-DVI (24+1), M/M, black, 2.0 m	11.99.5610	- 10
VALUE DisplayPort Cable, DP-DVI (24+1), M/M, black, 3.0 m	11.99.5611	- 10
VALUE DisplayPort Cable, DP-DVI (24+1), M/M, black, 5.0 m	11.99.5612	- 10

	Order-No.	- P.U.
ROLINE DisplayPort Cable, DP-DVI (24+1), M/M, black, 1.0 m	11.04.5613	- 10
ROLINE DisplayPort Cable, DP-DVI (24+1), M/M, black, 1.5 m	11.04.5619	- 10
ROLINE DisplayPort Cable, DP-DVI (24+1), M/M, black, 2.0 m	11.04.5610	- 10
ROLINE DisplayPort Cable, DP-DVI (24+1), M/M, black, 3.0 m	11.04.5611	- 10
ROLINE DisplayPort Cable, DP-DVI (24+1), M/M, black, 5.0 m	11.04.5612	- 10

## VALUE / ROLINE DisplayPort Cable, DP - HDTV



DisplayPort to HDTV cable for transferring content from your graphics card (DisplayPort) to your TV (HDTV) - with a quality of up to 1920x1080 @60Hz, incl. audio transmission!

- HDTV is the standard for digital video transmission in the TV/multimedia sector for e. g.: Connection of a TV set with HDMI interface to a player with DisplayPort connection.
- Cable with one DisplayPort and one HDTV plug.
- Note: A DisplayPort HDTV cable can only be used in one direction: the DisplayPort connector can only be used on the data source side (e. g. graphics card).

**roline**  
Designed for Professionals



	Order-No.	- P.U.
VALUE DisplayPort Cable, DP - HDTV, M/M, black, 1.0 m	11.99.5780	- 10
VALUE DisplayPort Cable, DP - HDTV, M/M, black, 1.5 m	11.99.5779	- 10
VALUE DisplayPort Cable, DP - HDTV, M/M, black, 2.0 m	11.99.5781	- 10
VALUE DisplayPort Cable, DP - HDTV, M/M, black, 3.0 m	11.99.5782	- 10
VALUE DisplayPort Cable, DP - HDTV, M/M, black, 4.5 m	11.99.5783	- 10
VALUE DisplayPort Cable, DP - HDTV, M/M, black, 10.0 m	11.99.5784	- 5

	Order-No.	- P.U.
ROLINE DisplayPort Cable, DP - HDTV, M/M, black, 1.0 m	11.04.5780	- 10
ROLINE DisplayPort Cable, DP - HDTV, M/M, black, 1.5 m	11.04.5779	- 10
ROLINE DisplayPort Cable, DP - HDTV, M/M, black, 2.0 m	11.04.5781	- 10
ROLINE DisplayPort Cable, DP - HDTV, M/M, black, 3.0 m	11.04.5782	- 10
ROLINE DisplayPort Cable, DP - HDTV, M/M, black, 4.5 m	11.04.5783	- 10



# [ Computer Cables / Connectors / Adapters

## ROLINE GOLD HDMI High Speed Cables with Ethernet



**ROLINE GOLD** - Top quality without any compromises! Cables in ROLINE GOLD quality come with high quality shielding and gilded contacts for contact safety even at high plug-in cycles. The plugs are gold coated to enhance their contact durability. Nylon-reinforced outer material in golden/black provides a better stability and gives the cable a stunning look.

- Cable with HDMI male connector on both sides
- HDMI Ethernet Channel- Adds high-speed networking to an HDMI link, allowing users to take full advantage of their IP-enabled devices without a separate ethernet cable
- Audio Return Channel- Allows an HDMI-connected TV with a built-in tuner to send audio data „upstream“ to a surround audio system, eliminating the need for a separate audio cable
- 3D- Defines input/output protocols for major 3D video formats

	Order-No.	– P.U.
ROLINE GOLD HDMI High Speed Cable, M/M, 1.0 m	11.04.5561	– 20
ROLINE GOLD HDMI High Speed Cable, M/M, 2.0 m	11.04.5562	– 20
ROLINE GOLD HDMI High Speed Cable, M/M, 3.0 m	11.04.5563	– 20
ROLINE GOLD HDMI High Speed Cable, M/M, 5.0 m	11.04.5565	– 10
ROLINE GOLD HDMI High Speed Cable, M/M, 10.0 m	11.04.5566	– 5
ROLINE GOLD HDMI High Speed Cable, M/M, 15.0 m	11.04.5560	– 5
ROLINE GOLD HDMI High Speed Cable, M/M, 20.0 m	11.04.5564	– 5
ROLINE GOLD HDMI High Speed Cable + Ethernet, M/M, 1.0 m	11.04.5501	– 20
ROLINE GOLD HDMI High Speed Cable + Ethernet, M/M, 1.5 m	11.04.5500	– 20
ROLINE GOLD HDMI High Speed Cable + Ethernet, M/M, 2.0 m	11.04.5502	– 20
ROLINE GOLD HDMI High Speed Cable + Ethernet, M/M, 3.0 m	11.04.5503	– 20
ROLINE GOLD HDMI High Speed Cable + Ethernet, M/M, 5.0 m	11.04.5505	– 10
ROLINE GOLD HDMI High Speed Cable + Ethernet, M/M, 7.5 m	11.04.5504	– 6
ROLINE GOLD HDMI High Speed Cable + Ethernet, M/M, 10.0 m	11.04.5506	– 5
ROLINE GOLD HDMI High Speed Cable + Ethernet, M/M, 15.0 m	11.04.5508	– 5
ROLINE GOLD HDMI High Speed Cable + Ethernet, M/M, 20.0 m	11.04.5510	– 5



# roline<sup>®</sup> GOLD

## ROLINE Serial Link Cables

- Connects two PCs via the serial interface, whereby the cable acts as a null modem
- Two 9-pole D-Sub sockets
- Connector casing moulded with special plastic, so optimal strain reduction, cable break not possible
- Very good screening prevents data loss and electromagnetic interference

9- pole F: 1|7|2|3| 4 |6|8|5|9  
9- pole F: 7|1|3|2|6|8| 4 |5|9

**roline<sup>®</sup>**  
Designed for Professionals



	Order-No.	– P.U.
ROLINE Serial Link Cable, DB9 F/F, 1.8 m	11.01.9018	– 50
ROLINE Serial Link Cable, DB9 F/F, 3.0 m	11.01.9030	– 50

## VALUE / ROLINE RS232 Cables

**Value<sup>®</sup>**

- Cable with two 9-pole D-Sub connectors
- Connects e.g. the serial IBM AT interface with a switchbox
- All lines connected 1:1
- Screen line connected with the foil screen and both connectors



**roline<sup>®</sup>**  
Designed for Professionals

	Order-No.	– P.U.
VALUE RS232 Cable, DB9 M - F, 1.8 m	11.99.6218	– 50
ROLINE RS232 Cable, DB9 M - F, 1.8 m	11.01.6218	– 50
ROLINE RS232 Cable, DB9 M - F, 3.0 m	11.01.6230	– 50
ROLINE RS232 Cable, DB9 M - F, 6.0 m	11.01.6260	– 25
ROLINE RS232 Cable, DB9 M - F, 10.0 m	11.01.6290	– 25

## ROLINE Serial Printer Cables

- Cable with a 9-pole D-Sub socket and a 25-pole D-Sub plug
- Connects PC and modem
- Connector casing moulded with special plastic, thus optimal strain reduction, no cable breaks
- Very good screening prevents data loss and electromagnetic interference
- Hand locking screws
- Bronze contacts with gold coating

DB9 F: 1|2|3| 4 |5|6|7|8|9  
DB25 M: 8|3|2|20|7|6|4|5|22

	Order-No.	– P.U.
ROLINE Serial Printer Cable, DB9 F - DB25 M, 1.8 m	11.01.4618	– 50
ROLINE Serial Printer Cable, DB9 F - DB25 M, 3.0 m	11.01.4630	– 50



**roline<sup>®</sup>**  
Designed for Professionals



## VALUE VGA-DVI-HDMI-DP Adapters

### 12.99.3115

- To connect a DVI cable to an HDMI interface
- Adapter with HDMI plug and 24+1 DVI-D socket

### 12.99.3116:

- To connect an HDMI cable to a DVI interface
- Adapter with HDMI socket and 24+1 DVI-D plug

### 12.99.3120/12.99.3152:

- For combining HDMI cable and components with mini HDMI connector
- Adapter with HDMI socket and HDMI mini plug

### 12.99.3123/12.99.3151:

- For connecting two HDMI cables
- Adapter with HDMI socket and HDMI socket

### 12.99.3114/12.99.3113:

- For connecting a VGA cable to e.g. a notebook with HDMI socket
- Adapter with VGA socket and HDMI plug

### 12.99.3135/12.99.3136/12.99.3156:

- For combining VGA cables and components with display port connection
- Adapter with DisplayPort plug and VGA socket

### 12.99.3133/12.99.3137/12.99.3157:

- For combining DVI cable and components with display port connection
- Adapter with DisplayPort connector and 24+1 DVI-D socket

### 12.99.3134/12.99.3144/

### 12.99.3139/12.99.3162/

### 12.99.3138/12.99.3158:

- For combining HDMI cable and components with display port connection
- Adapter with DisplayPort plug and HDMI socket
- 12.99.3144: Compliant with DP v1.2

#### Notice:

A DisplayPort to HDMI or DVI connection can only be used in one direction. The DisplayPort connector can only be used on the data source side (e.g. graphics card).



**Value**®

Picture	Order-No. – P.U.	Adapter / Cableadapter	Type	Connector	Length	Version	Active	Passive	Color	Max. nom. Resolution	4K (@30Hz)
A	12.99.3115 – 50	Cableadapter	HDMI – DVI	M/F	0.15	–	–	yes	black	1600 x 1080	–
B	12.99.3116 – 50	Cableadapter	DVI – HDMI	M/F	0.15	–	–	yes	black	1600 x 1080	–
C	12.99.3120 – 25	Cableadapter	HDMI – HDMI Mini	F/M	0.15	–	–	yes	black	1920 x 1080	–
D	12.99.3152 – 20	Adapter	HDMI – HDMI Mini	F/M	–	–	–	yes	black	1920 x 1080	–
E	12.99.3123 – 20	Cableadapter	HDMI – HDMI	F/F	0.15	–	–	yes	black	1920 x 1080	–
F	12.99.3151 – 20	Adapter	HDMI – HDMI	F/F	–	–	–	yes	black	1920 x 1080	–
G	12.99.3114 – 10	Cableadapter	HDMI – VGA	M/F	0.15	–	yes	–	black	1920 x 1080	–
H	12.99.3113 – 10	Adapter	HDMI – VGA	M/F	–	–	yes	–	black	1920 x 1080	–
I	12.99.3135 – 10	Cableadapter	DP – VGA	M/F	0.15	v 1.1	yes	–	black	1920 x 1080	–
I.1	12.99.3136 – 10	Cableadapter	DP – VGA	M/F	–	–	–	yes	black	1920 x 1080	–
	12.99.3156 – 10	Adapter	DP – VGA	M/F	–	–	–	yes	black	1920 x 1080	–
	12.99.3137 – 10	Cableadapter	DP – DVI	M/F	–	–	–	yes	black	1920 x 1080	–
J	12.99.3133 – 10	Cableadapter	DP – DVI	M/F	0.15	v 1.1	–	yes	black	1920 x 1080	–
	12.99.3157 – 10	Adapter	DP – DVI	M/F	–	–	–	yes	black	1920 x 1080	–
K	12.99.3138 – 10	Cableadapter	DP – HDMI	M/F	–	–	–	yes	black	1920 x 1080	–
	12.99.3158 – 10	Adapter	DP – HDMI	M/F	–	–	–	yes	black	1920 x 1080	–
K.1	12.99.3134 – 10	Cableadapter	DP – HDMI	M/F	0.15	v 1.1	–	yes	black	1920 x 1080	–
	12.99.3139 – 10	Cableadapter	DP – HDMI	M/F	–	v 1.2	–	yes	black	3840 x 2160	–
L	12.99.3144 – 10	Cableadapter	DP – HDMI	M/F	0.15	v 1.2	–	yes	black	3840 x 2160	yes
N	12.99.3162 – 10	Cableadapter	DP – HDMI	M/F	–	v 1.4	–	yes	black	3840 x 2160	–
O	12.99.3145 – 10	Cableadapter	HDMI – DP	F/M	–	v 1.2	–	yes	black	3840 x 2160	–
	12.99.3160 – 10	Adapter	DP – Mini DP	M/F	–	v 1.2	–	yes	black	3840 x 2160	–
P	12.99.3165 – 10	Adapter	DP – DP	F/F	–	v 1.2	–	yes	black	3840 x 2160	–



# [ Computer Cables / Connectors / Adapters

## ROLINE VGA-DVI-HDMI-DP Adapters

### 12.03.3105:

- To connect a VGA monitor to a DVI graphics card
- Adapter with HD15-pin socket and DVI-I plug

### 12.03.3110:

- To connect a DVI monitor to a VGA graphics card
- Adapter with HD15-pin plug and DVI-I socket

### 12.03.3114/12.03.3117:

- To connect a VGA cable to an HDMI interface
- Adapter with HDMI plug and VGA socket

### 12.03.3115:

- To connect a DVI cable to an HDMI interface
- Adapter with HDMI plug and 24+1 DVI-D socket

### 12.03.3116:

- To connect an HDMI cable to a DVI interface
- Adapter with HDMI socket and 24+1 DVI-D plug

### 12.03.3152:

- For combining HDMI cable and components with mini HDMI connector
- Adapter with HDMI socket and HDMI mini plug

### 12.03.3151:

- For connecting two HDMI cables
- Adapter with HDMI socket and HDMI socket

### 12.03.3135/12.03.3146:

- For combining VGA cables and components with display port connection
- Adapter with DisplayPort plug and VGA socket, cable length approx. 10cm

### 12.03.3133/12.03.3136:

- For combining DVI cable and components with display port connection
- Adapter with DisplayPort connector and 24+1 DVI-D socket

### 12.03.3134/3160:

- For combining HDMI cable and components with display port connection
- Adapter with DisplayPort plug and HDMI socket

### 12.03.3125/12.03.3140:

- Mini DisplayPort VGA adapter for connecting a VGA M/M cable to a Mini DisplayPort connector of the graphics card
- Adapter with Mini DisplayPort plug and VGA socket, cable length approx. 10cm

### 12.03.3128/12.03.3137:

- Mini DisplayPort DVI adapter for connecting a DVI M/M cable to a Mini DisplayPort connector of the graphics card
- Adapter with Mini DisplayPort plug and DVI socket, cable length approx. 10cm

### 12.03.3129/12.03.3142/12.03.3161:

- Mini DisplayPort HDMI adapter for connecting an HDMI M/M cable to a Mini DisplayPort connector of the graphics card
- Adapter with Mini DisplayPort plug and HDMI socket, cable length approx. 10cm
- 12.03.3161: additional VGA socket

### 12.03.3130/12.03.3163:

- For connecting a normal DP cable to e.g. a notebook with Mini DP socket
- Adapter with DisplayPort socket and Mini DisplayPort plug

### 12.03.3132:

- For combining a Mini DP cable to a device with DP socket
- Adapter with DisplayPort connector and Mini DisplayPort socket

**Note: A DisplayPort to HDMI or DVI connection can only be used in one direction. The DisplayPort connector can only be used on the data source side (e.g. graphics card).**



**roline**<sup>®</sup>  
Designed for Professionals

Picture	Order-No. – P.U.	Adapter / Cableadapter	Type	Connector	Length	Version	Active	Passive	Color	Max. nom. Resolution	4K (@30Hz)
A	12.03.3105 – 50	Adapter	DVI – VGA	M/F	–	–	–	yes	black	1920 x 1080 (*)	–
B	12.03.3110 – 50	Adapter	DVI – VGA	F/M	–	–	–	yes	black	1920 x 1080 (*)	–
C	12.03.3117 – 10	Adapter	HDMI – VGA	M/F	–	–	yes	–	black	1920 x 1080	–
D	12.03.3114 – 10	Cableadapter	HDMI – VGA	M/F	0.15	–	yes	–	white	1920 x 1080	–
E	12.03.3115 – 50	Adapter	HDMI – DVI	M/F	–	–	–	yes	black	1920 x 1080	–
F	12.03.3116 – 50	Adapter	DVI – HDMI	M/F	–	–	–	yes	black	1920 x 1080	–
G	12.03.3152 – 20	Adapter	HDMI – HDMI Mini	F/M	–	–	–	yes	black	1920 x 1080	–
H	12.03.3151 – 20	Adapter	HDMI – HDMI	F/F	–	–	–	yes	black	1920 x 1080	–
J	12.03.3135 – 10	Cableadapter	DP – VGA	M/F	0.15	v 1.1a	yes	–	white	1920 x 1080	–
J	12.03.3146 – 10	Cableadapter	DP – VGA	M/F	0.15	v 1.2	yes	–	white	1920 x 1080	–
K	12.03.3133 – 10	Cableadapter	DP – DVI	M/F	0.1	v 1.1a	–	yes	white	1920 x 1080	–
L	12.03.3136 – 10	Cableadapter	DP – DVI	M/F	0.1	v 1.2	–	yes	white	3840 x 2160	yes
M	12.03.3134 – 10	Cableadapter	DP – HDMI	M/F	0.1	v 1.1a	–	yes	white	1920 x 1080	yes
N	12.03.3160 – 10	Cableadapter	DP – HDMI	M/F	0.1	v 1.2	yes	–	white	3840 x 2160	yes
O	12.03.3125 – 10	Cableadapter	Mini DP – VGA	M/F	0.15	v 1.1a	yes	–	white	1920 x 1080	–
O	12.03.3140 – 10	Cableadapter	Mini DP – VGA	M/F	0.15	v 1.2	yes	–	white	1920 x 1080	–
P	12.03.3128 – 10	Cableadapter	Mini DP – DVI	M/F	0.1	v 1.1a	–	yes	white	1920 x 1080	–
Q	12.03.3137 – 10	Cableadapter	Mini DP – DVI	M/F	0.1	v 1.2	–	yes	white	3840 x 2160	yes
R	12.03.3129 – 10	Cableadapter	Mini DP – HDMI	M/F	0.1	v 1.1a	–	yes	white	1920 x 1080	–
R	12.03.3142 – 10	Cableadapter	Mini DP – HDMI	M/F	0.15	v 1.2	yes	–	white	3840 x 2160	yes
S	12.03.3161 – 5	Cableadapter	Mini DP – HDMI/VGA**	M/F	0.1	v 1.2	yes	–	silver	3840 x 2160	yes
T	12.03.3130 – 20	Adapter	Mini DP – DP	M/F	–	v 1.2	–	yes	black	3840 x 2160	yes
U	12.03.3163 – 10	Cableadapter	DP – Mini DP	F/M	0.1	v 1.2	–	yes	white	3840 x 2160	yes
V	12.03.3132 – 20	Cableadapter	DP – Mini DP	M/F	0.1	v 1.2	–	yes	white	3840 x 2160	yes

\* depends on graphic card / \*\* only ONE single output available (DVI or HDMI or DP - 12.99.3150) / (HDMI or VGA - 12.03.3161)



## ROLINE Cables Type C - VGA, DVI, HDMI, DisplayPort

- **USB 3.1 Cable Type C to VGA/DVI/HDMI/DisplayPort for Macbook**
- Connect your MacBook with USB-C port to any correspondent display or projector
- This adapter allows you to mirror your MacBook display to your TV or display
- No power adapter required
- Supports maximum resolutions up to 1920 x 1080 @60Hz (Full HD 1080p) – Type C- VGA
- Supports maximum resolutions up to 3840x2160 @ 30Hz- Type C- DVI
- Supports maximum resolutions up to 3840x2160 @ 60Hz- Type C- HDMI/DP
- Connectors: VGA Male and Type C Male (11.04.5820/11.04.5821/11.04.5822)
- Connectors: DVI Male and Type C Male (11.04.5830/11.04.5831)
- Connectors: HDMI Male and Type C Male (11.04.5840/11.04.5841)
- Connectors: DisplayPort Male and Type C Male (11.04.5845/11.04.5846)
- DisplayPort Version 1.2 allows increased resolutions, higher refresh rates, and greater color depth



**roline®**  
Designed for Professionals

	Order-No.	–	P.U.
ROLINE USB Type C - VGA Cable, M/M, 1.0 m	11.04.5820	–	10
	Order-No.	–	P.U.
ROLINE USB Type C - DVI Cable, M/M, 1.0 m	11.04.5830	–	10
ROLINE USB Type C - DVI Cable, M/M, 2.0 m	11.04.5831	–	10

	Order-No.	–	P.U.
ROLINE Type C - HDMI Cable, M/M, 1.0 m	11.04.5840	–	10
ROLINE Type C - HDMI Cable, M/M, 2.0 m	11.04.5841	–	10
ROLINE Type C - HDMI Cable, M/M, 3.0 m	11.04.5842	–	10
ROLINE Type C - HDMI Cable, M/M, 5.0 m	11.04.5843	–	10
	Order-No.	–	P.U.
ROLINE Type C - DisplayPort Cable, M/M, 1.0 m	11.04.5845	–	10
ROLINE Type C - DisplayPort Cable, M/M, 2.0 m	11.04.5846	–	10

## VALUE Cableadapter, VGA+Audio - HDMI, M/F

- Easy and simple solution to connect media and display devices
- Ideal for projectors, presentations or any other audio/visual project (e.g. multimedia presentation) you may have
- Allows the upscaling of analog VGA signals to digital HDMI signals, ideal for connecting PCs and laptops to HDMI displays such as HDTVs
- Supports both video and audio, 1080p resolution
- The converter takes audio from the computer via 3.5mm connector and embeds it to the HDMI output along with the video
- The cableadapter features a MicroB USB port for an connection to a USB power source (connection is required)

- VGA cable adapter: 0.15m Audio cable length: 0.5m USB cable length: 1m
- Maximum resolution: 1920 x 1080
- Color: black



	Order-No.	–	P.U.
VALUE Cableadapter, VGA+Audio - HDMI, M/F, 0.15 m	12.99.3117	–	10

## VALUE Cableadapter, HDMI - VGA+Audio, M/F, (Stereo)

**Use modern notebooks with HDMI output on display units which have a VGA input!**

- Easy and simple solution to connect media and display devices
- Ideal for projectors, presentations or any other audio/visual project (e.g. multimedia presentation) you may have
- Supports both video and audio, 1080p resolution
- The audio signal from the HDMI source is transmitted to the audio input using a 3.5mm plug
- The cableadapter features a MicroB USB port for an connection to a USB power source (connection is required)
- Maximum resolution: 1920 x 1080 (1080p)
- Color: silver/black

- Length: 0.15m (HDMI)

Note: this adapter works only in one direction from HDMI to VGA



	Order-No.	–	P.U.
VALUE Cableadapter, HDMI - VGA+Audio, M/F, (Stereo)	12.99.3119	–	10

## VALUE Internal SATA 6.0 Gbit/s Cable with Latch

Some of the advantages of the new ATA series (SATA technology) are conditional on the use of relatively thin and flexible cables, which simplifies the use in the computer substantially and also brings a clear improvement to the air flow inside the computer housing.

- Connect your high-speed Serial ATA device (e. g. HDD) to a Serial ATA controller
- Support data transfer rates of up to 6.0 Gbit/s
- Compatible with SATA 1.5 Gbit/s (SATA I) and 3.0 Gbit/s (SATA II)
- 4-pin cable with ground wires
- Connectors: 2x internal 7-pin SATA with latch on both connectors



**Value®**

	Order-No.	–	P.U.
VALUE Internal SATA 6.0 Gbit/s Cable with Latch, 0.5 m	11.99.1550	–	20
VALUE Internal SATA 6.0 Gbit/s Cable with Latch, 1.0 m	11.99.1551	–	20



# [ Computer Cables / Connectors / Adapters

## VALUE Display Adapter, USB 3.1 Type C to VGA / DVI / HDMI / DisplayPort

Connect one or more monitors to your tablet - such as a MacBook - with a USB type C port, or Projectors on.

These display adapters are available for  
VGA, DVI, HDMI and (Mini-)DisplayPort.  
- No software is required; simply connect  
- ready!  
- Portable, compact design  
- No power supply required  
- Cable length: approx. 10 cm



Brand	Description / Connection Type	Video-Connection	USB3.1 PD Connection	Other Connections	Max. Resolution	Picture	Order-No. – P.U.
	USB 3.1 Display Adapter Type						
VALUE	C - VGA	1x HD15 F	-		2048 x 1536@50Hz	A	12.99.3200 – 10
VALUE	C - VGA + Audio	1x HD15 F	-	1x 3.5mm F	1920 x 1080@60Hz	B	12.99.3203 – 10
VALUE	C - VGA + USB3.0 A + Typ C (PD)	1x HD15 F	yes	1x USB3.0 A F	2048 x 1536@50Hz	C	12.99.3201 – 10
VALUE	C - HDMI	1x HDMI F	-		3840 x 2160@30Hz	D	12.99.3210 – 10
VALUE	C - HDMI 4K	1x HDMI F	-		3840 x 2160@60Hz	E	12.99.3211 – 10
VALUE	C - VGA + HDMI	1x HDMI F	-	1x HD15 F	HDMI: 3840 x 2160@30Hz VGA: 1920 x 1080@60Hz (2 output using at the same time: 1920 x 1080@60Hz)	F	12.99.3215 – 10
VALUE	C - HDMI + 2x USB 3.0 A + PD	1x HDMI F	yes	2x USB3.0 A F	3840 x 2160@30Hz	G	12.99.1133 – 10
VALUE	C - HDMI + USB 3.0 A + PD	1x HDMI F	yes	1x USB3.0 A F	3840 x 2160@30Hz	H	12.99.1131 – 10
VALUE	C - DisplayPort v1.2	1x DP F, v1.2	-		3840 x 2160@60Hz	I	12.99.3220 – 10
VALUE	C - Mini DisplayPort v1.2, white	1x Mini DP F, v1.2	-		3840 x 2160@60Hz	J	12.99.3225 – 10
VALUE	C - Mini DisplayPort v1.2, black	1x Mini DP F, v1.2	-		3840 x 2160@60Hz	K	12.99.3226 – 10
VALUE	C - VGA + HDMI + DVI	1x HDMI F	-	1x HD15 F + DVI-D F	3840 x 2160@60Hz	L	12.99.3229 – 10
VALUE	C - VGA + HDMI + DVI + DP	1x HDMI F	-	1x HD15 F + DVI-D F + DP F	3840 x 2160@60Hz	N	12.99.3231 – 5



## ROLINE USB Type C Docking Station, 4K HDMI, USB 3.2 Gen 1, SD/MicroSD Card Reader, Power Delivery, Gigabit Ethernet

The docking station is supplied for Macbooks, Ultrabooks or Notebooks/Laptops and provides a quick and easy connection to the workplace peripherals that you use every day, including one HDMI connector, that allows you a maximum resolution of up to 3840x2160 @60Hz!

- Plug & Play
- Aluminium casing
- Small, compact design
- System requirement: Windows 7/8/10 or MacOS X10.2 and higher

### Connection to device:

- 1x USB 3.1 / USB 3.2 Gen 2 Type C M


### Connection for peripheral devices

- 1x HDMI Video Output: Mirror or extend your screen to a TV, monitor or projector.
- 2x USB 3.0 / USB 3.2 Gen 1 ports (data transfer rate up to 5Gbit/s), for connection of wired keyboard/mouse, USB HDD/SSD, etc.
- 1x SD/TF Card Reader
- 1x USB Type C PD (Power Delivery) + Data
- 1x RJ45 for Gigabit Ethernet

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

**roline**<sup>®</sup>  
Designed for Professionals

- Contents: Docking Station, manual

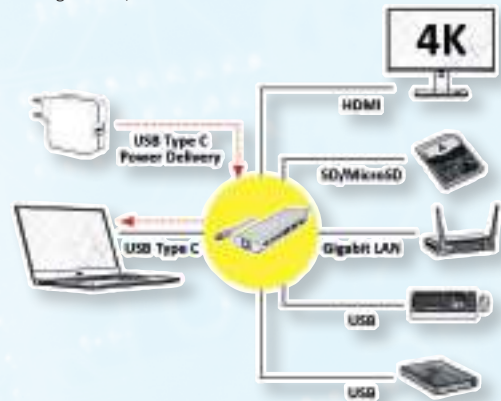

Order-No. – P.U.

ROLINE USB Type C docking station, 4K HDMI, 2x USB 3.0 / USB 3.2 Gen 1 ports, 1x SD/MicroSD card reader, 1x USB Type C PD (Power Delivery) + Data, 1x Gigabit Ethernet	12.02.1037	– 5
--	------------	-----

## VALUE USB Type C Docking Station, 4K HDMI, 3x USB 3.2 Gen 1, Gigabit Ethernet

The docking station is supplied for Macbooks, Ultrabooks or Notebooks/Laptops and provides a quick and easy connection to the workplace peripherals that you use every day, including one HDMI connector, that allows you a maximum resolution of up to 3840x2160 @60Hz!

- Plug & Play
- Aluminium casing
- Small, compact design
- System requirement: Windows 7/8/10 or MacOS X10.2 and higher

### Connection to device:


- 1x USB 3.1 / USB 3.2 Gen 2 Type C M

### Connection for peripheral devices

- 1x HDMI Video Output: Mirror or extend your screen to a TV, monitor or projector.
- 3x USB 3.0 / USB 3.2 Gen 1 ports (data transfer rate up to 5Gbit/s), for connection of wired keyboard/mouse, USB HDD/SSD, etc.
- 1x SD/TF Card Reader
- 1x USB Type C PD (Power Delivery) + Data
- 1x RJ45 for Gigabit Ethernet

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

- Contents: Docking Station, manual

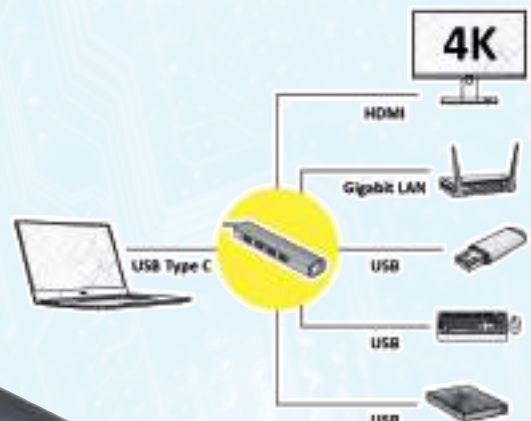

**Value**<sup>®</sup>

Order-No. – P.U.

VALUE USB Type C Docking Station, 4K HDMI, 3x USB 3.2 Gen 1, Gigabit Ethernet	12.99.1043	– 5
---	------------	-----



# [ Computer Cables / Connectors / Adapters

## VALUE / ROLINE Monitor Power Cables, IEC 320 C14 - C13

- Monitor power cable with moulded plugs
- Connectors: IEC 320-C14 plug to IEC 320-C13 plug
- Nominal data: 250V AC/10A
- Colour: black

	Order-No.	– P.U.
VALUE Monitor Power Cable, IEC 320 C14 - C13, black, 0.5 m	19.99.1505	– 20
VALUE Monitor Power Cable, IEC 320 C14 - C13, black, 1 m	19.99.1510	– 20
VALUE Monitor Power Cable, IEC 320 C14 - C13, black, 1.8 m	19.99.1515	– 50
VALUE Monitor Power Cable, IEC 320 C14 - C13, black, 3 m	19.99.1530	– 50
ROLINE Monitor Power Cable, IEC 320 C14 - C13, black, 0.5 m	19.08.1505	– 50
ROLINE Monitor Power Cable, IEC 320 C14 - C13, black, 1 m	19.08.1510	– 30
ROLINE Monitor Power Cable, IEC 320 C14 - C13, black, 1.8 m	19.08.1515	– 50
ROLINE Monitor Power Cable, IEC 320 C14 - C13, black, 3 m	19.08.1530	– 50
	Order-No.	– P.U.
VALUE Monitor Power Cable, IEC 320 C14 - C13, white, 1.8 m	19.99.1516	– 50
ROLINE Monitor Power Cable, IEC 320 C14 - C13, red, 0.8 m	19.08.1525	– 25
ROLINE Monitor Power Cable, IEC 320 C14 - C13, red, 1.8 m	19.08.1520	– 25
ROLINE Monitor Power Cable, IEC 320 C14 - C13, yellow, 0.8 m	19.08.1526	– 25
ROLINE Monitor Power Cable, IEC 320 C14 - C13, yellow, 1.8 m	19.08.1521	– 25
ROLINE Monitor Power Cable, IEC 320 C14 - C13, blue, 0.8 m	19.08.1527	– 25
ROLINE Monitor Power Cable, IEC 320 C14 - C13, blue, 1.8 m	19.08.1522	– 25
ROLINE Monitor Power Cable, IEC 320 C14 - C13, green, 0.8 m	19.08.1528	– 25
ROLINE Monitor Power Cable, IEC 320 C14 - C13, green, 1.8 m	19.08.1523	– 25



**Value**<sup>®</sup>

**roline**<sup>®</sup>  
Designed for Professionals

## VALUE/ROLINE Power Cable, straight IEC Connector

- Cable with safety plug 90° angulate (German safety plug) and IEC 320-C13
- Plugs: German safety plug to C13 plug
  - Nominal data: 250V AC/2.5A
  - Colour: black



	Order-No.	– P.U.
ROLINE Power Cable, straight IEC Connector, black, 1.8 m	A 19.08.1018	– 50
ROLINE Power Cable, straight IEC Connector, 3 m	A 19.08.1030	– 50
	Order-No.	– P.U.
VALUE Power Cable, straight IEC Connector, black, 1.8 m	19.99.1018	– 50
VALUE Power Cable, straight IEC Connector, white, 1.8 m	19.99.1019	– 50
VALUE Power Cable, angled IEC Connector, black, 1.8 m	19.99.1118	– 50
VALUE Power Cable, straight Compaq Connector, black, 1.8 m	19.99.1028	– 20

## VALUE / ROLINE Euro Power Cables, 2-Pin

- Suitable e.g. for notebook power supply
- Connectors: Europlug to IEC320-C7 plug
- Moulded plugs
- 250V AC/2.5A



**roline**<sup>®</sup>  
Designed for Professionals

	Order-No.	– P.U.
VALUE Euro Power Cable, 2-Pin, black, 1.8 m	19.99.2096	– 100
VALUE Euro Power Cable, 2-Pin, white, 1.8 m	19.99.2095	– 100
VALUE Euro Power Cable, 2-Pin, black, 3.0 m	19.99.2092	– 50
VALUE Euro Power Cable, 2-Pin, black, 5.0 m	19.99.2094	– 50
VALUE Swiss Power Cable, 3-Pin / C13, black, 1.8 m, SWISS	19.99.1220	– 50
VALUE Swiss Power Cable, 3-Pin / C13, black, 3 m, SWISS	19.99.1222	– 50
ROLINE Euro Power Cable, 3-Pin / C13, black, 1.8 m, SWISS	19.07.2097	– 50
	Order-No.	– P.U.
ROLINE Euro Power Cable, 2-Pin, black, 3.0 m	19.07.2073	– 50
ROLINE Euro Power Cable, 2-Pin, black, 5.0 m	19.07.2078	– 50



## ROLINE USB Charger, C5 Connection, 1x Type C Port, 65W

**For charging or as power supply of a device via USB type C - with up to 65W!**

- For charging devices with USB Type C socket such as MacBooks, Ultrabooks, Notebooks, Laptops, NUCs, Tablets or even Smartphones
- Perfect for on the go: simply use any cable with C5 plug and country-specific connection
- Supports USB PD (Power Delivery) function on output port
- Protection: Current / short-circuit / overvoltage protection
- Compact design, black housing and cable
- Input: 100-240V AC, 50-60Hz
- Output: 5V-3A, 9V-3A, 12V-3A, 15V-3A, 20V-3, 25A (max. 65 W)

**roline®**  
Designed for Professionals



Order-No. – P.U.

ROLINE USB Charger, C5 Connection, 1x Type C Port, 65W

19.11.1034 – 10

## ROLINE Mini Gender Changers

- Connection between two similar connectors
- Low leverage on the computer connector due to compact construction (17 mm long)
- All lines are connected 1:1
- Incl. locking screws

Order-No. – P.U.

ROLINE Mini Gender Changer, 9-pin M - M

12.03.2025 – 50

ROLINE Mini Gender Changer, 9-pin F - F

12.03.2030 – 50



**roline®**  
Designed for Professionals

## VALUE Converter Cable USB to Serial

- Quick solution for the use of peripheral devices with serial interfaces (e.g. modems, digital cameras, printers) with notebooks or computers with USB interface
- Data transfer rate of over 1Mbit/s
- Connections: 1x USB Type A, 1x DB 9-pin connector
- Equivalent to the USB 1.1 specification
- Length: 1.8 m
- Contents: Converter cable, adapter DB9 F-DB25 M, driver CD



Order-No. – P.U.

VALUE Converter Cable USB to Serial, 1.8 m

12.99.1160 – 10

## ROLINE Converter Cable USB to Serial

- With this converter you can easily connect peripheral devices, such as analogue and ISDN modems, digital cameras and handheld computers, which have a serial interface to an USB environment
- Easy installation
  - True plug & play
  - Supports automatic handshake mode
  - Supports remote wake up and power management

- Needs no interrupt (IRQ)
- Length: 1.8 m
- Supported operating systems: Windows 98SE/ME/2000/XP/7/8
- Contents: Converter cable, driver CD, manual



**roline®**  
Designed for Professionals

Order-No. – P.U.

ROLINE Converter Cable USB to Serial, 1.8 m

12.02.1163 – 10

## Converter RS232-RS485, without or with Galvanic Isolation

- DCE/DTE adjustable
- Full duplex transfer over 4 lines
- Only the data lines are converted
- 25 pin socket on the RS232 side
- Power supply via mains adapter
- Robust plastic casing
- Contents: converter, power supply unit (9V DC, 300mA), manual

### Technical data:

RS-232 connection:	D-Sub 25-pin F
RS-485 connection:	Terminal block (4 clamps)
Data transfer rate:	Up to ca. 100 Kbit/s
Transfer distance:	Up to ca. 1 km
Power supply:	DC 9V, 200mA
Weight:	60 g
Dimensions (WxDxH):	74.5 x 54 x 18.5 mm



Order-No. – P.U.

Converter RS232-RS485, without Galvanic Isolation

12.02.1028 – 20

Converter RS232-RS485, with Galvanic Isolation

12.02.1029 – 10

**roline®**  
Designed for Professionals





## [ Adapters / Power Strips

### HDD Mounting Adapter Type 3.5/2.5

#### 16.01.3031:

- This hard disk mounting adapter serves for installation of type 2.5 hard disks into a free type 3.5 slot
- For installation of type 2.5 hard disks in a type 3.5 slot
- Nickel plated
- Contents: 2 brackets, screws

#### 16.01.3028:

- This hard disk mounting adapter serves for installation of type 3.5 hard disks into a free type 5.25 slot
- Nickel plated
- Contents: 2 brackets, screws

#### 16.01.3006:

- For installation of type 3.5 enclosures (e. g. floppy drives) in an (open) type 5.25 slot
- Solid ABS-plastic, black
- Screws included

#### 16.01.3007:

- For the installation of up to two type 2.5 HDDs into any type 3.5 drive bay of a computer case
- Solid plastic, black
- Screws included



Order-No. – P.U.

HDD Mounting Adapter Type 3.5/2.5	A	16.01.3031	– 25
HDD Mounting Adapter, Type 3.5/5.25	B	16.01.3028	– 50
HDD Mounting Adapter Type 3.5 for 2x Type 2.5 HDDs, black	C	16.01.3007	– 20

### VALUE Holder for iPad/Ebook/Tablet

- Under desk (clamp) cabinet mount for most of the tablets like iPad1, iPad2, iPad3, iPad 4, iPad Air and iPad Air 2, Samsung Galaxy 10.1 and Tab 2
- 360° rotation of panel and base
- Flexible angle between two legs of 36°~180°
- Adjustable top leg length of 26-64mm
- Die casting joint part connecting aluminum arms with length of 120mm
- Freely ±30° tilted silicone feet for holding your tablets perfectly
- Tilt of panel: ±125°
- Tilt of arms: ±100°
- Material: aluminum/steel/plastic



Order-No. – P.U.

VALUE Holder for iPad/Ebook/Tablet, Clamp Type, 4 Joints	17.99.1151	– 5
--	------------	-----

### VALUE Power Strips

- 3/6-way power strip with plastic housing
- With or without switch
- Sockets are 45° rotated
- Colour: white / black



Order-No. – P.U.

VALUE Power Strip, 3-way, white, 1.5 m	19.99.1072	– 20
VALUE Power Strip, 3-way, white, 3.0 m	19.99.1073	– 10
VALUE Power Strip, 3-way, with Switch, white, 1.5 m	19.99.1076	– 20
VALUE Power Strip, 3-way, with Switch, white, 3.0 m	19.99.1077	– 10
VALUE Power Strip, 3-way, with Switch, white, 6.0 m	19.99.1078	– 10
VALUE Power Strip, 3-way, with Switch, white, 10.0 m	19.99.1079	– 10
VALUE Power Strip, 6-way, white, 1.5 m	19.99.1080	– 20
VALUE Power Strip, 6-way, white, 3.0 m	19.99.1081	– 10
VALUE Power Strip, 6-way, with Switch, white, 1.5 m	19.99.1084	– 20
VALUE Power Strip, 6-way, with Switch, white, 3.0 m	19.99.1085	– 10
VALUE Power Strip, 6-way, with Switch, white, 6.0 m	19.99.1086	– 10
VALUE Power Strip, 6-way, with Switch, white, 10.0 m	19.99.1087	– 10





## ROLINE PDU for Cabinets / ROLINE 19" PDU for Cabinets 8x IEC320 C13 - C20

DATA CENTER  
Product

- 19" socket (1UH) for installation in 19" cabinets, incl. installation angle
- Arrangement of sockets: 45°
- Profile of anodized aluminium
- Cable type: 2.0m H05VV-F 3G 1,50mm<sup>2</sup>, black
- Max load/power: 16A 3600W; VDE / GS tested
- Color: ALU / light gray RAL 7035
- Width: 440mm

**roline**<sup>®</sup>  
Designed for Professionals


	Order-No.	- P.U.
ROLINE PDU for Cabinet, 9x socket, 45°, 16A, Aluminium, 2m	19.07.1620	- 10
ROLINE PDU for Cabinet, 9x socket, 45°, 16A, black, 2m	19.07.1621	- 10
ROLINE 19" PDU for Cabinet 8x 2300W, IEC320 C14 M, Aluminium, 2m	19.07.1622	- 10
ROLINE 19" PDU for Cabinet 8x 2300W, IEC320 C14 M, black, 2m	19.07.1623	- 10
ROLINE 19" PDU for Cabinet 9x socket, 45°, 16A, UTE Version, black, 2m	19.07.1624	- 10

- 19" socket (1UH) for installation in 19" cabinets, incl. installation angle
- Arrangement of sockets: 90°
- Profile of anodized aluminium
- Cable type: 2.0m H05VV-F 3G 1.5mm<sup>2</sup> (19.07.1627) black
- Max load/power: 16A 3600W (19.07.1627)
- Color: ALU / light gray RAL 7035
- Width: 440mm

ROLINE 19" PDU for Cabinets 8x 2300W, IEC320 C13 - C20 M, Aluminium, 2.0 m

Order-No. - P.U.

19.07.1627 - 10

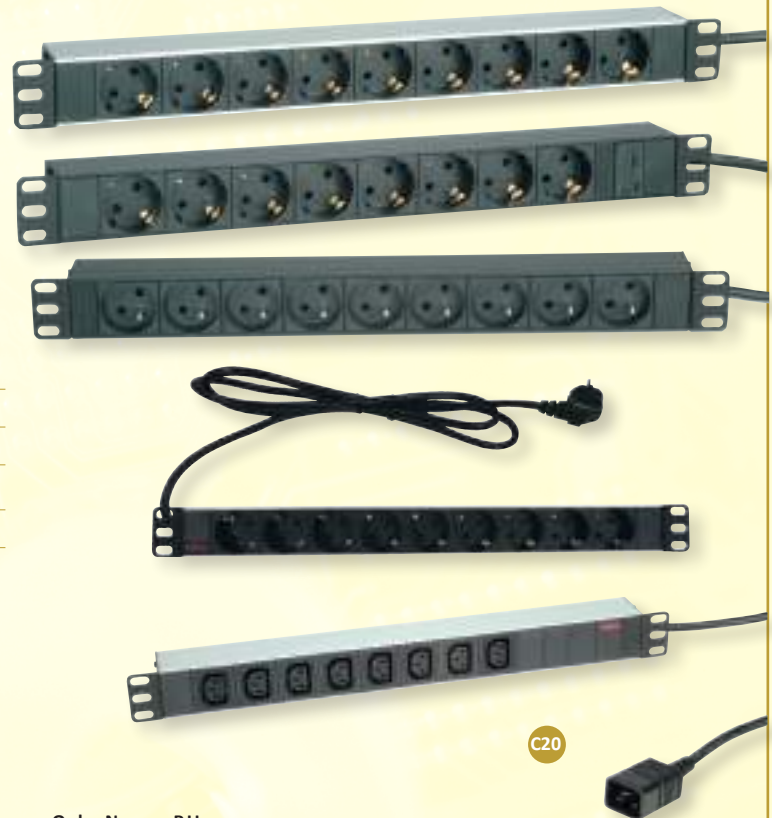

## VALUE IP Power Strip

DATA CENTER  
Product

The VALUE IP power strip provides the on/off-switching of electrical devices over a TCP/IP network. Easily connect the VALUE IP power strip to a power supply system and the network. After allocating a free IP address, every single port can be independently switched with every common webbrowser.

- For installation in a 19" cabinet, height: 1U
- Easy and quick plug & play installation
- Easy and flexible configuration over a webbrowser
- IP adress fix or over DHCP
- Built-in temperature and humidity sensor to monitor your used infrastructure
- Setting of the circuit delay time for On/Off function of each C13 port to prevent the impact of power surge to the system
- LED indication for power status of every port

- Digital display for total power
- Automatic circuit breaker protection

- Technical data:  
Connections: RJ-45, Ethernet 10/100Mbit, front side  
Output: 8x IEC320 C13 (10A)  
Input: 1x IEC320 C20 (16A)  
Rocker switch: Back side, lighted, 2-pole  
Indication: 8 LEDs  
Protocol: http  
Addressing: DHCP or constant IP address  
Dimensions (WxDxH): 430 x 90 x 44  
Contents: IP power bar

**Value**<sup>®</sup>



	Order-No.	- P.U.
VALUE IP Power Strip, 8-way	19.99.3420	- 1



## VALUE HDMI Extender over TP

3D capable 1080p FULL HD

- The transmission distance of the HDMI signal can be extended up to 25 meters by using two Cat. 5e/6 cables
- Max. resolution (nominal) while using two Cat.5e cables, 25 m: 1080p
- HDCP pass-through
- Stable metal casing
- Power supply included in delivery
- Contents: Transmitter (2x RJ-45 F, HDMI F), Receiver (2x RJ-45, HDMI F), 1x power supply (5V DC, 2A) for receiver, manual

### Technical Data:


Max. resolution (nominal):	1.920 x 1.200, 1080p
Local unit:	2x RJ-45 F, 1x HDMI F
Remote unit:	2x RJ-45 F, 1x HDMI F
Dimensions:	20 x 45 x 80 mm
Power supply:	DC 5V; 2A



Order-No. – P.U.

VALUE HDMI Extender over Twisted Pair, 25 m

14.99.3460 – 5

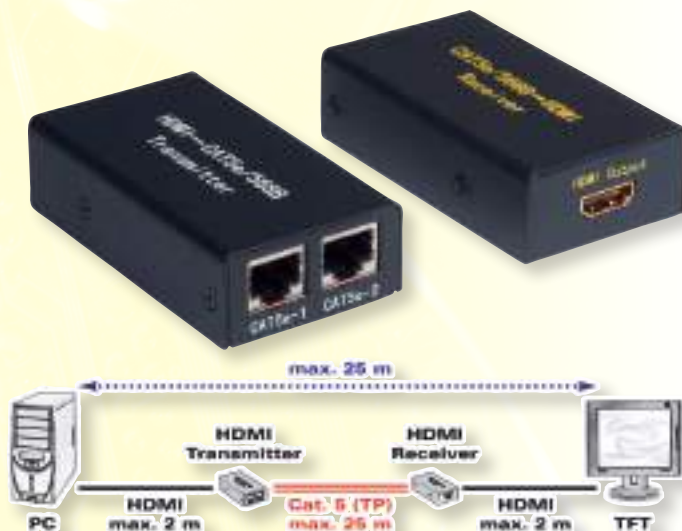


## ROLINE HDMI Splitter, 4K

4K 2160p ULTRA HD

- Duplicates a HDMI video signal to 2/4 HDMI video signals with a 4K resolution
- Connectors: 1 HDMI Input (e.g. DVD-player), 2/4 HDMI outputs
- Supports 480i, 480p, 720i, 720p, 1080i, 1080p, 3840 x 2160 (@60Hz)
- Supports VGA, SVGA, XGA, UXGA
- Supports 3D
- Plug & play, easy to install and simple to operate
- No software installation required
- Contents: splitter, manual, powersupply

**roline**  
Designed for Professionals

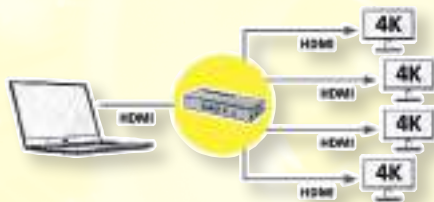

Order-No. – P.U.

ROLINE HDMI Splitter, 4K, 2-way

14.01.3585 – 5

ROLINE HDMI-splitter, 4K, 4-way

14.01.3586 – 5

## VALUE Headset

- Ideal device for multimedia applications and video conferencing
- With volume control on the cable
- Connection to PC over 3.5 mm stereo plug
- Cable length: ca. 1.8 m



Order-No. – P.U.

VALUE Stereo Headphone with Volume Control, light grey

15.99.1316 – 50

## Universal Crimping Tool for Modular Plugs

- For 4/6/8-pole modular plugs from AMP System WE or DEC (RJ-12 and MMJ)
- Suitable for cutting, insulation removal (ribbon cable) and crimping
- Fitted with a forced lock with unlocking capability in the case of incorrect use
- Universally usable
- Robust metal tongs



Order-No. – P.U.

Universal Crimping Tool for Modular Plugs

19.06.1048 – 10



## PC Troubleshooting Tool Set, 145-piece

This tool case is perfect for the computer, electronics and do-it-yourselfer. It includes all the most frequently need to repair or maintenance computer or TV, radio set and other electronic equipments.

• Contents:

- 3 way ratchet driver with storage
- Hollow star bits: T-8H, T-10H, T-15H, T-20H, T-25H, T-27H, T-30H, T-35H, T-40H
- Hex key set: 2 mm, 2.4 mm, 2.8, 3.2 mm, 3.6 mm, 4 mm
- Metric hex key set: 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm, 6 mm
- Spanner set: 4, 9, 8, 10
- Tri-wing set: 1, 2, 3, 4
- Torq set: 6, 8, 10
- Solid star bit: T-8, T-10, T-15, T-20, T-27
- #1 pozdriver bit
- #4 and #6 slotted bits
- #1 Philips bit
- Square bit: 50, 51, 52, 53
- Nutdriver socket adapter
- Bit holder
- 5-pc. nutdriver set: 4.7 mm, 6.4 mm, 7.9 mm, 8.7 mm, 9.5 mm

- 5-pc. metric nutdriver set: 6mm, 7mm, 8mm, 9mm, 10mm
- Tweezers
- Pen knife
- Needle nose pliers
- Diagonal cutting pliers
- 6-pc. precision screwdriver set.
- Insulated chip extractor
- 3 pronged parts retriever
- Magnetic telescope picking up tool
- Flash light
- Wire strippers
- Deluxe wire strippers
- PC board brush
- Electrical PCV tape
- Soldering iron
- Solder remover
- Solder wire
- Solder stand
- Metal hammer with rubber
- 9 wrenches
- Mini vacuum cleaner witch accessories
- 1 scalpel
- 20 cable ties
- 1 set with cable terminal attachments



Order-No. – P.U.

PC Troubleshooting Tool Set, 145-piece

19.06.2031 – 5

## HOBBS LANtest Multinetwork Cable Tester

- Continuity testing of coax cables with BNC connectors and 8-pole data lines w. fitted RJ-45 connectors
- The device recognises open and short-circuited (wire/wire or wire/shield) connections
- A two-line display (LEDs) indicates sequentially which pin of the RJ-45 connector at cable end A is connected with which pin at cable end B and manual or automatic switch advancing is possible; in the case of a short-circuit more than two LEDs light up simultaneously
- The device has 2 RJ-45 sockets; with the supplied Remote Kit cables laid in the wall can also be tested
- Two adapter cables (BNC/RJ-45) are supplied for testing coax cables
- Battery (not included in delivery):  
1x E-block 9V (6LR61/AM-6)



Order-No. – P.U.

HOBBS LANtest Multinetwork Cable Tester

13.01.3383 – 4



## VALUE LAN Cable Multifunction Tester

- The tester can check UTP and STP Cat.5e, Cat.6, Cat.6a and coaxial cables
- It can identify and locate the distance to an open or short circuit
- Uses TDR (Time Domain Reflectometer) to measure the length and distance to the defective of a cable
- Identification of wiring and pin assignment
- LCD backlight display
- Low battery indication



Order-No. – P.U.

VALUE LAN Cable Multifunction Tester

13.99.3002 – 1





# [ Office Equipment

## ROLINE VESA Adapter

### • 17.03.1100:



- Accommodates standard VESA 100 compliant monitors (100 x 100 mm)

### 17.03.1106:

- Accommodates monitors with standard VESA 100, 200 (100 x 200 and 200 x 200 mm) to mounting systems with VESA 100 (100 x 100 mm)
- Variable adjustable

### 17.03.1103:

- Accommodates monitors with standard VESA 400, 200 (400 x 400 mm) to mounting systems with VESA 100 (100 x 100 mm)
- Variable adjustable



Order-No. – P.U.



ROLINE VESA Adapter, black	A 17.03.1100	– 50
ROLINE VESA Adapter 100x100-100x200/200x200, variable, silver	17.03.1106	– 20
ROLINE VESA Adapter 100x100-400x400, variable, silver	B 17.03.1103	– 20

**roline**<sup>®</sup>  
Designed for Professionals

## VALUE LCD Monitor Wall Mount Kit

- For screen sizes: 36 cm up to 61 cm
- Weight capacity: up to 15 kg
- Tilttable: 160° up or down
- Swiveling (Pivot function): 270°
- Meets VESA standard VESA 75 (75x75 mm) and VESA 100 (100x100 mm)
- Material: Cold steel construction
- Colour: Black

Technical data:	17.99.1120	17.99.1121
Fixing:	wall mount	wall mount
Load capacity:	15 kg	15 kg
Screen size:	36 cm up to 61 cm	36 cm up to 61 cm
Pivot function:	270°	270°
Tilttable up or down:	160°	180°
Rotatable right or left:	-	180°
Arm length:	up to 90 mm	up to 130 mm





Order-No. – P.U.

VALUE LCD Monitor Wall Mount Kit, 1 Joint	A 17.99.1120	– 10
VALUE LCD Monitor Wall Mount Kit, black, 2 Joints	B 17.99.1121	– 10

## VALUE LCD Monitor Wall Mount Kit

- Space saving and solid mounting of
- Screen can be swiveled, tilted and rotated
- Easy to mount with sliding bracket design
- Meets with VESA 75 x 75 mm or 100 x 100 mm

Technical data:	17.99.1125	17.99.1129
Fixing:	wall mount	wall mount
Load capacity:	up to 8 kg	up to 15 kg
Pivot function:	yes	yes
Arm length:	10 cm	41.8 cm

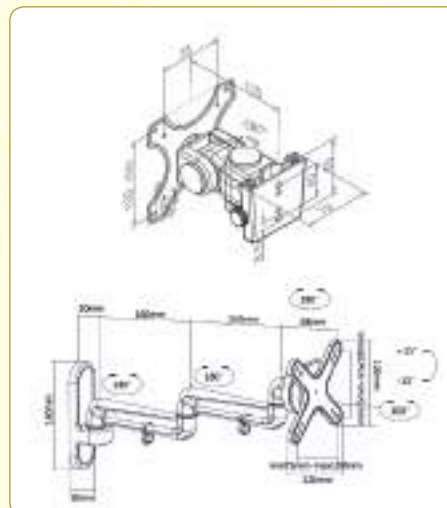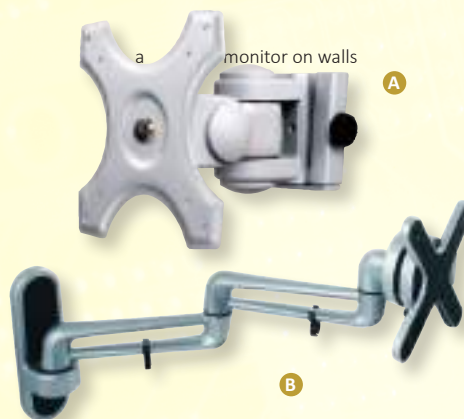

Order-No. – P.U.

VALUE LCD Monitor Wall Mount Kit, 2 Joints	A 17.99.1125	– 12
VALUE LCD Monitor Wall Mount Kit, 5 Joints	B 17.99.1129	– 5






## VALUE Single/ Dual LCD Monitor Stand Pneumatic, Desk Clamp, Pivot

LCD monitor arm with gas spring for easy and reliable adjustment of a monitor weighing up to 6.5kg and VESA 75 / 100!

- Made of high quality aluminum alloy
- Meets VESA 75 (75x75 mm) or VESA 100 (100x100 mm)
- Special feature: Pivot function- screen is 90 degrees rotatable
- Small desktop mount saves space
- A clever cable management is built into the rear arm

### Specifications:

- Arm extension: ~ 500 mm
- Lift: 160 ~ 410 mm
- Monitor pivot: 180°
- Rotation: 360° (arm & display)
- Loading capacity: max. 6.5 kg

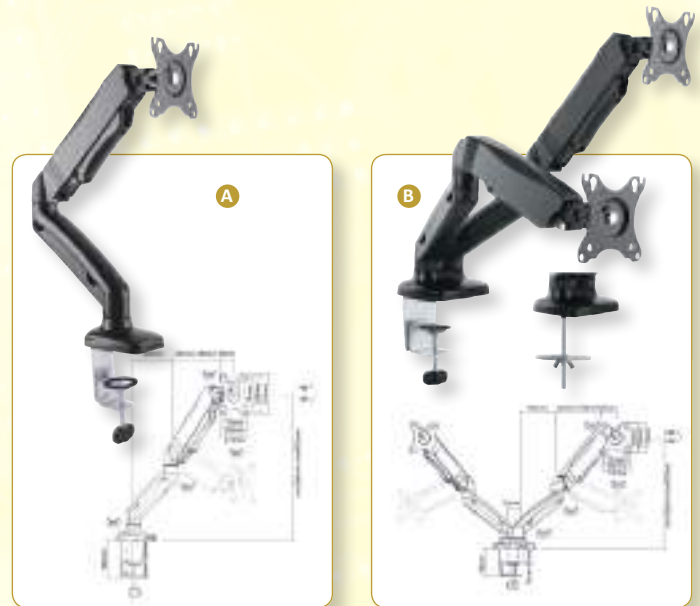

Order-No. – P.U.

VALUE LCD Monitor Stand Pneumatic, Desk Clamp, Pivot, 2 Joints	A	17.99.1155	– 4
VALUE Dual LCD Monitor Stand Pneumatic, Desk Clamp, Pivot, 2 Joints	B	17.99.1163	– 3


## VALUE LCD Monitor Stand Pneumatic, Desk Clamp, 5 Joints, Pivot

Gas spring integrated allows users to move the LCD panel in most positions at will

- Made of high quality aluminum alloy
- Meets VESA 75 (75x75 mm) or VESA 100 (100x100 mm)
- Special feature: Pivot function- screen is 90 degrees rotatable
- Small desktop mount saves space
- A clever cable management is built into the rear arm

### Specifications:

- Arm extension: ~ 605 mm
- Lift: 170 ~ 500 mm
- Monitor pivot: 180°
- Rotation: 360° (arm & display)
- Loading capacity: max. 9 kg

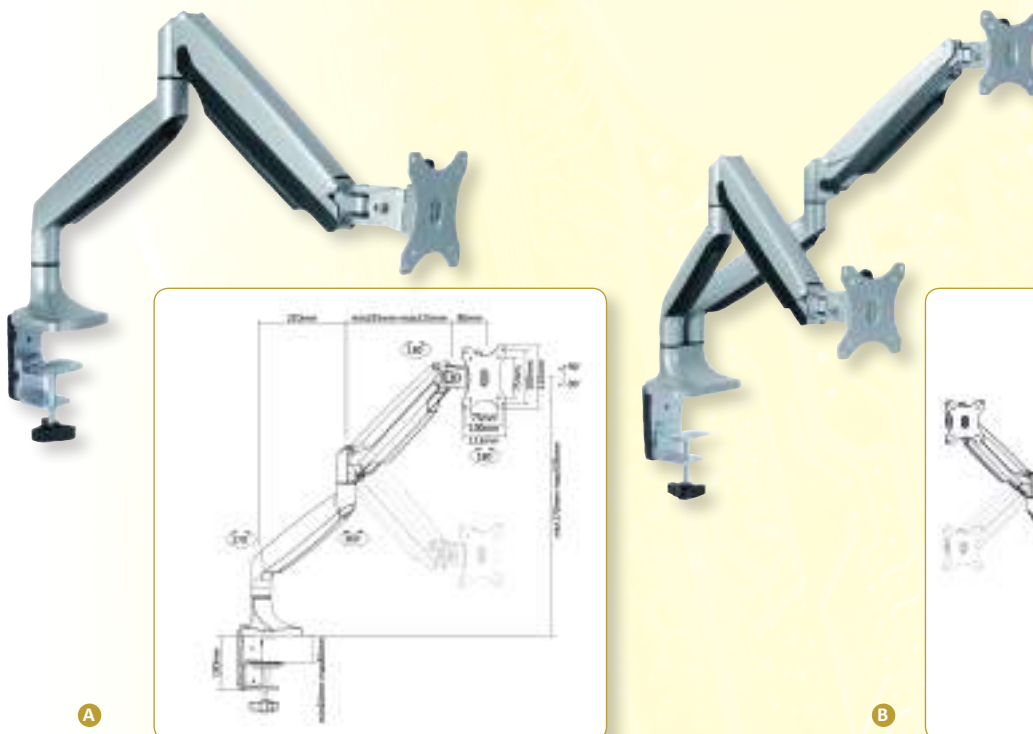

Order-No. – P.U.

VALUE LCD Monitor Stand Pneumatic, Desk Clamp, 5 Joints, Pivot	A	17.99.1145	– 4
VALUE Dual LCD Monitor Arm, Desk Clamp, 6 Joints, height adjustable separately, gas spring	B	17.99.1147	– 2



# [ Office Equipment / TV Holder

## ROLINE LCD/TV Wall Mount

- Arm length: up to 425 mm
- Max. load: 25 kg
- Mounts your screen to the wall and monitor can be tilted, swivelled and rotated
- Meets VESA 75 x 75 mm, VESA 100 x 100 mm, VESA 100 x 200 mm, VESA 200 x 200 mm
- Colour: black
- Contents: supporting arm, mounting screws, 6 mm hex wrench, manual, cable clips


Technical data: 17.03.1169  
 Fixing: wall mount  
 Load capacity: up to 25 kg  
 Joints: 5  
 Arm length: 42 cm

**roline**<sup>®</sup>  
 Designed for Professionals

Order-No. – P.U.

ROLINE LCD/TV Wall Mount, 5 Joints


17.03.1169 – 6

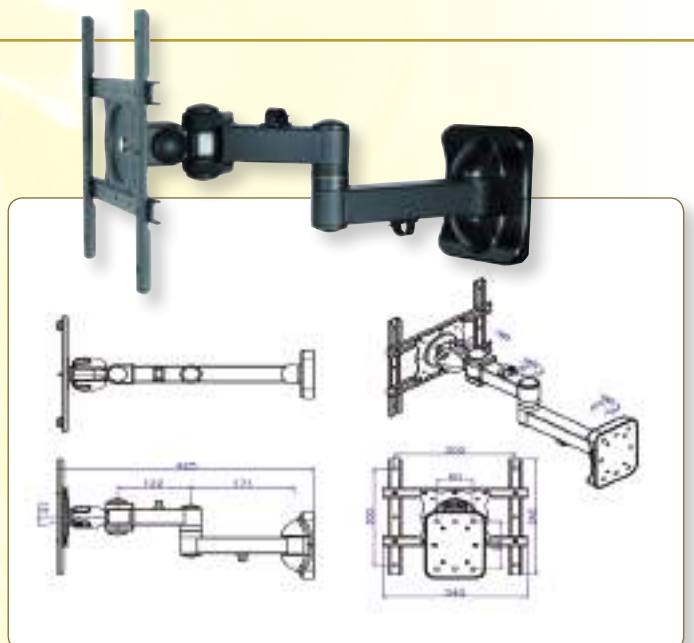

## VALUE Wallmount Workstation, Pneumatic

MEDICAL  
ENVIRONMENT

- This is a complete solution that accommodates a LCD, keyboard and CPU, creating a sit-stand workstation
- It is perfect for space-constrained areas by simply fold the keyboard and LCD tight against the wall when not in use
- This wall mounted computer workstations include a sturdy 90.5mm (width) x 500mm (length) x 20mm (depth) (x 2pcs.) aluminum posts that mounts to wall
- Articulating arms built-in VESA 75/100 compliant mount bracket can be tilted, panned and rotated.
- The CPU/power supply holder adjusts to hold items up to 100mm (width) securely and includes non-skid cushions to prevent marring
- CPU holder weight capacity: up to 10kg
- Keyboard holder weight capacity: 3-5kg
- Monitor holder weight capacity: 3-5kg

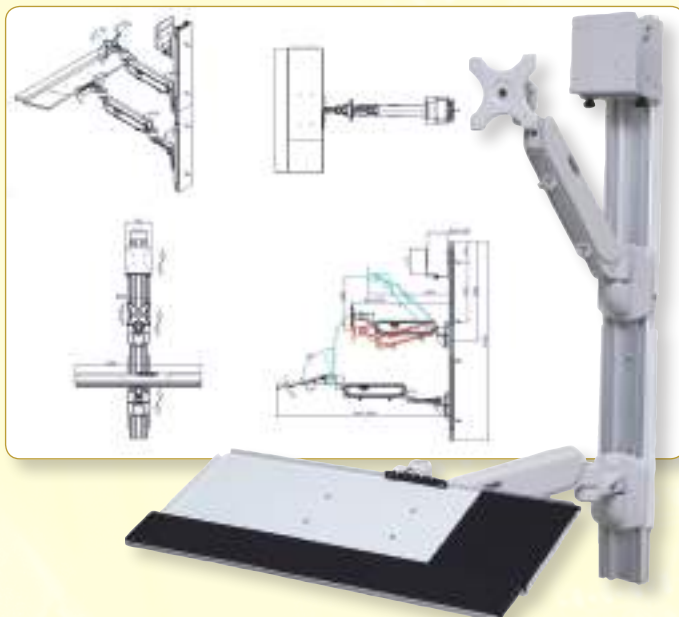

Order-No. – P.U.

VALUE Wallmount Workstation, Pneumatic

17.99.1139 – 1

## VALUE Dual LCD Monitor Arm, Desk Clamp, height adjustable separately

The Dual LCD Arm makes your workstation more efficient and you gain more work-space.

- Designed for two monitors
- The two aluminium arms are easy to adjust for swinging into any position
- Each display can be tilted to any angle you need
- The height of the LCD monitors is for both monitors separately adjustable
- Load capacity: up to 5 kg each monitor
- Meets VESA 75 (75 x 75 mm) or VESA 100 (100 x 100 mm)
- Arm length: up to 2x 350 mm
- With a C-clamp for desk mount



Order-No. – P.U.

VALUE Dual LCD Monitor Arm, Desk Clamp, 4 Joints, height adjustable separately


17.99.1134 – 2



## VALUE LCD/Plasma TV Cart, silver

Ideal for applications in conference rooms or class rooms!

- For an easy mobile use of a large LCD monitor or flat-screen TV
- For fixing LCDs with screen size: 69- 152 cm (27"- 60")
- Load capacity: up to 50 kg
- Adjustable height: 110 up to 180 cm
- TV can be tilted downward up to 15 degrees
- Platform for e. g. holding a DVD player or notebook (WxD): 498 x 400 mm
- Cables can go through the tube
- Four wheels for easy movement whereof two are lockable

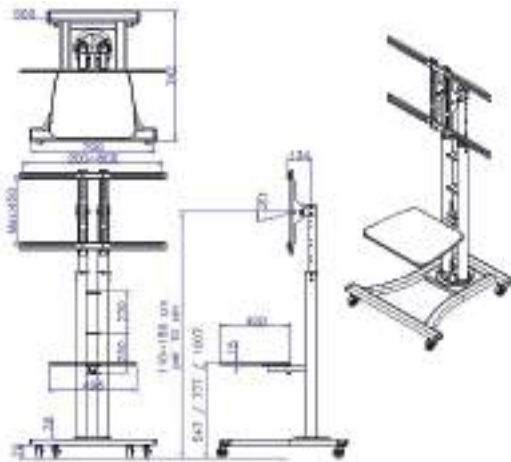

**Value**®

Order-No. – P.U.

VALUE LCD/Plasma TV Cart, silver

17.99.1320 – 1

## VALUE LCD/TV Mobile Cart

Ideal for applications in conference rooms or class rooms!

- For an easy mobile use of a large LCD monitor or TV
- For fixing LCDs with:
- Handy holders for moving the stand
- Platform for a DVD player or notebook
- Cable channel inside vertical carrier



**Value**®

Order-No. – P.U.

VALUE LCD/TV Mobile Cart

17.99.1164 – 1

VALUE LCD/TV Mobile Cart, heavy weight (up to 125kg)

17.99.1165 – 1



# [ Office Equipment / TV Holder

## ROLINE LCD/TV Mobile Cart, up to 50 kg

MEDICAL  
ENVIRONMENT


Ideal for applications in conference or class rooms, easily suitable for meetings and presentations!

- Telescopic Height Adjustable TV Cart
- Rotating function of 0°-90° to switch between „landscape“ and „portrait“ mode
- Optional Webcam Mount included in the scope of delivery
- Height adjustable TV mount
- Free-tilting design between +5° and -12° for multiple monitor viewing angles
- Quick-release spring lock adjusts height effortlessly
- Quick assembly shelf assures easy post-intallation
- Cable management keeps everything organized
- Sturdy base with heavy-duty casters
- Supports max. VESA: 600x400
- Suggested screen size: up to 94 cm - 177.8 cm (37“-70“)
- Maximum weight capacity: 50kg

Installation  
Video



**roline**<sup>®</sup>  
Designed for Professionals

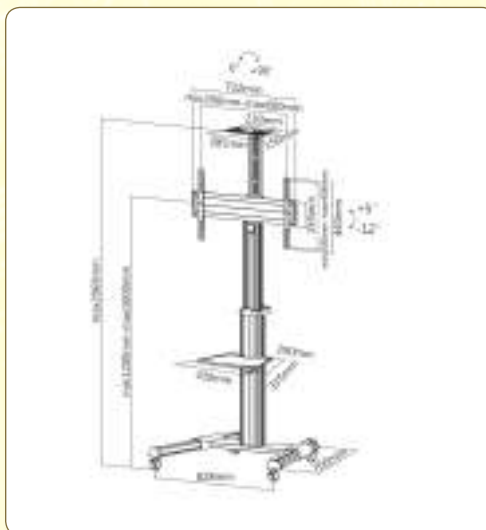

Order-No. – P.U.

ROLINE LCD/TV Mobile Cart, up to 50 kg

17.03.1260 – 1

## ROLINE LCD/TV Mobile Cart, up to 100 kg

MEDICAL  
ENVIRONMENT


Ideal for applications in conference or class rooms, easily suitable for meetings and presentations!

- Telescopic Height Adjustable TV Cart
- Height adjustable TV mount
- Optional Webcam Mount included in the scope of delivery
- Free-tilting design between +5° and -10° for multiple monitor viewing angles
- Quick-release spring lock adjusts height effortlessly
- Quick assembly shelf assures easy post-intallation
- Cable management keeps everything organized
- Sturdy base with heavy-duty casters
- Supports max. VESA: 1000x600
- Suggested screen size: up to 152,4 cm - 254 cm (60“-100“)
- Maximum weight capacity: 100kg



**roline**<sup>®</sup>  
Designed for Professionals

Installation  
Video

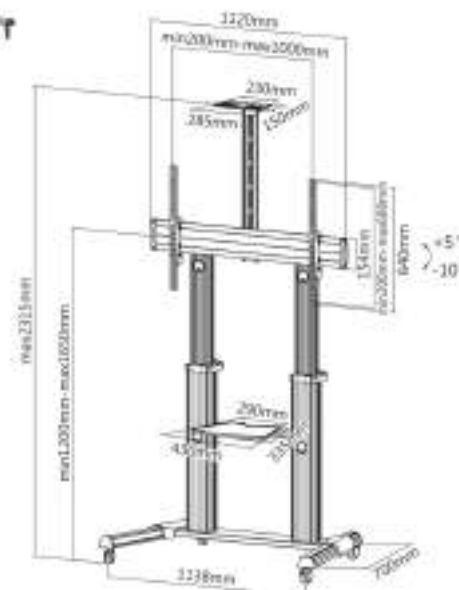

Order-No. – P.U.

ROLINE LCD/TV Mobile Cart, up to 100 kg

17.03.1261 – 1




## VALUE Solid Articulating Wall Mount TV Holder, up to 177.8cm (37" – 70")

- Dual-arm full-motion wall mount for TVs (LED, LCD flat panel TVs) up to 177,8cm (37" – 70")
- Max. weight: 50kg
- This mount extends out 510mm from wall and allows TVs to turn 60° left or right
- Full motion allows maximum flexibility- tilts and swivel your TV for easy viewing from any seat in a room
- Post-installation level adjustment allows the TV to „roll“ up to 3° clockwise and counterclockwise to ensure it's perfect level
- Integrated cable management system keeps cables organized and protected
- Wide wall plate fits for 406/450mm stud installation

### Technical Data:

- Material: Steel
- Product weight: 7 kg
- Recommended Screen Size: up to 177,8cm (37"-70")
- Installation: Solid wall, Double Stud
- Max. Load Capacity: 50kg
- Max.Hole Pattern: 626x400mm
- VESA Standard: 200x200,400x200, 300x300,400x400,600x400
- Max.VESA: 600x400
- Tilt: -20° ~ +10°
- Swivel: -60° ~ +60°
- Level Adjustment: -3° ~ +3°

### Installation Video

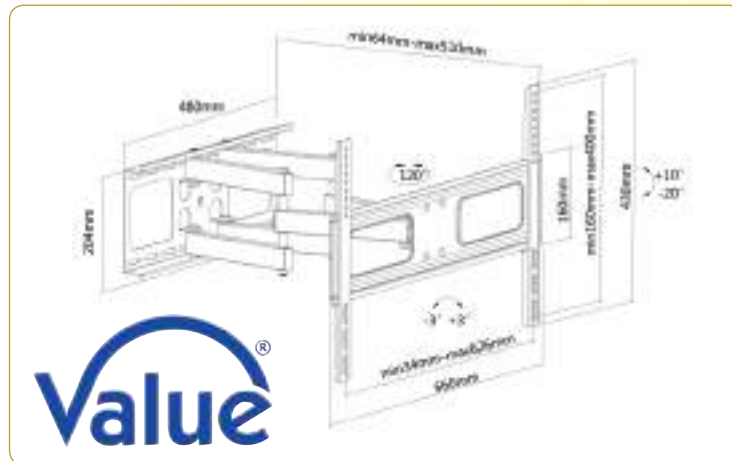


Order-No. – P.U.

VALUE Solid Articulating Wall Mount TV Holder, up to 177.8cm, black 17.99.1205 – 2

## ROLINE PC Holders

- Under desk PC holder
- Stable steel construction, telescopic (not 17.03.1127/28)
- To be fixed under your table board (min. 15 mm), screws not included
- Height and width adjustable
- Rotation up to 90° (17.03.1129/30) resp. up to 180° (17.03.1131/36/37/85)

Technical data:	17.03.1127/28	17.03.1129/30	17.03.1136/37	17.03.1185	17.03.1131
Max. weight:	30 kg	30 kg	20 kg	10 kg	10 kg
Height adj.:	390-540 mm	390-540 mm	-500 mm	390-540 mm	390-540 mm
Width adj.:	134-234 mm	134-234 mm	50-240 mm	70-134 mm	50-100 mm
Pull out:	no	150 mm	140 mm	yes	yes
Rotation:	no	90°	180°	180°	180°



A



Order-No. – P.U.

ROLINE PC Holder, black	A	17.03.1127	– 2
ROLINE PC Holder, silver	A	17.03.1128	– 2
ROLINE PC Holder with rotation function, black	B	17.03.1129	– 2
ROLINE PC Holder with rotation function, silver	B	17.03.1130	– 2
ROLINE PC Holder, extensible, rotatable, black	C	17.03.1136	– 4
ROLINE PC Holder, extensible, rotatable, silver	C	17.03.1137	– 4
ROLINE PC Holder, extendable, with rotation function	D	17.03.1185	– 2
ROLINE Mini PC Holder, extendable, with rotation function, black	E	17.03.1131	– 4

**roline**  
Designed for Professionals



# [ Office Equipment

## ROLINE Printer Tables


### 17.01.1085

- Stable metal frame
- Printer shelf and floor level shelf (WxD: 46x39 cm)
- Mobile through 4 wheels, 2 of them are lockable
- Load bearing capacity: up to 30kg
- Colour:  
frame: light grey  
surface: white  
surface border: white
- Dimensions (HxWxD): 38x51x44 cm

**roline**<sup>®</sup>  
Designed for Professionals




A



### 17.01.1087

- Stable metal / man-made material frame
- Printer shelf (WxD: 68x50 cm)
- Middle shelf (WxD: 58.5x44 cm)
- Floor level shelf (WxD: 57.5x31.5 cm)
- Mobile through 4 castors, 2 of which are lockable
- Level screws hinder the printer table from tilting on it's side
- Load bearing capacity: up to 30 kg
- Colour:  
frame: light grey  
surface: white  
surface border: grey
- Dimensions: 77.5x68x54 cm

B



Order-No. – P.U.

ROLINE Mini Printer Table

A 17.01.1085 – 1



ROLINE Printer Table

B 17.01.1087 – 1

## ROLINE Printer Table, up to 80 kg

**roline**<sup>®</sup>  
Designed for Professionals

- Stable metal / plastic frame
- Load bearing capacity: up to 80 kg
- Printer shelf (WxD: 68x50 cm)
- Middle shelf (WxD: 59x44 cm)
- Floor level shelf (WxD: 59x31.5 cm)
- Level screws prevent the printer table from tilting on its side
- Colour:  
frame: light grey  
surface: white  
surface border: grey
- Dimensions (WxHxD): 74x68x55 cm

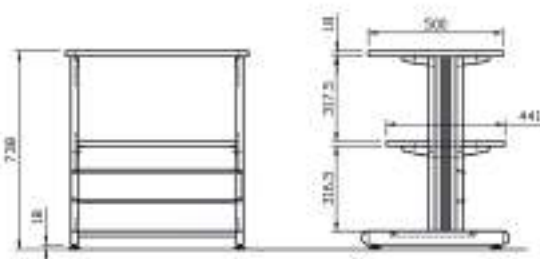

Order-No. – P.U.

ROLINE Printer Table, up to 80 kg

17.01.1089 – 1

## ROLINE PC Standing Workstation

- Stable metal/plastic frame
- Load bearing capacity: up to 40 kg
- Top shelf (WxD: 68 x 50 cm) for monitor etc.
- Slide-out keyboard shelf (WxD: 53.5 x 35 cm) with mouse surface (28 x 23 cm)
- Slide-out shelf (WxD: 53.5 x 35 cm) which can be used for printers
- Floor level shelf (WxD: 57.9 x 31.5 cm)
- Up to 40kg load bearing capacity
- Mobile via 4 wheels, 2 of which can be locked
- Colour:  
frame: light grey  
surface: white  
surface border: grey
- Dimensions (HxWxD): 110 x 68 x 54 cm

**roline**<sup>®</sup>  
Designed for Professionals

Order-No. – P.U.

ROLINE PC Standing Workstation

17.02.1545 – 1





## VALUE Mini PC Holder

- Space-saving Mini PC holder which offers more room at your desk
- For Mini PCs
- Stable steel construction
- To be fixed under your table board (screws not included)
- Height and width of holder is adjustable




Order-No. – P.U.

VALUE Mini PC Holder, black

17.99.1140 – 8

## Mobile PC Stand

- Creates more space on your desk, due to it being under the table
- Stable metal construction with high tilt-stability
- Adjustable from 140-250 mm PC width
- Fitted with rubber mats against slipping and scratching
- More flexible in use

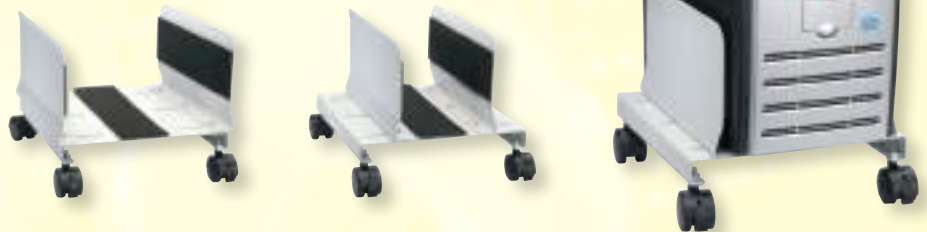


Order-No. – P.U.

Mobile PC Stand

17.05.1516 – 5

## VALUE Mobile PC Stand

- Creates more space on your desk, due to it being under the table
- Stable metal construction with high tilt-stability
- Adjustable from 119- 209 mm PC width
- More flexible in use
- 2 locking heavy-duty casters

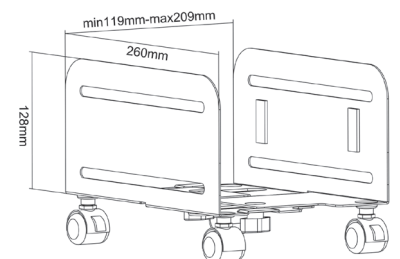


Order-No. – P.U.

VALUE Mobile PC Stand, black

17.99.1500 – 6

## Mouse Pad, Cloth

- Optimal use on smooth surfaces
- Upper layer: Nylon cloth
- Optimized for optical and laser mice
- Dimensions: 255×215×5mm
- Colour: Black

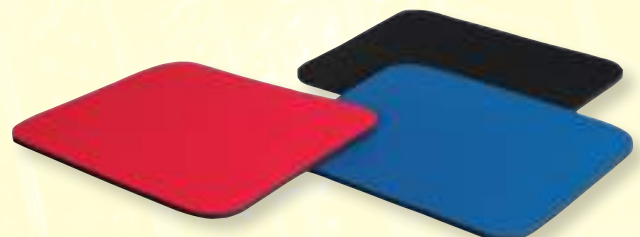

Order-No. – P.U.

Mouse Pad, Cloth, black

18.01.2040 – 50

Mouse Pad, Cloth, blue

18.01.2041 – 50

Mouse Pad, Cloth, red

18.01.2042 – 50



## VALUE Cable Cover Organizer (Under Desk Mount)

### For clean cable routing under the desk

- Desktop cable tray organizer
- Simple design: hides wire and power cords for a clean workspace
- Manage all cables: enough room for power stripes, network, and computer cabling
- Easy installation
- Dimensions: 600 x 114 x 76 mm
- Contents:

1x cable manager à 600 x 114 x 76 mm




Order-No. – P.U.

VALUE Cable Cover Organizer (Under Desk Mount), black

17.99.1315 – 6

VALUE Cable Cover Organizer (Under Desk Mount), white



17.99.1316 – 6

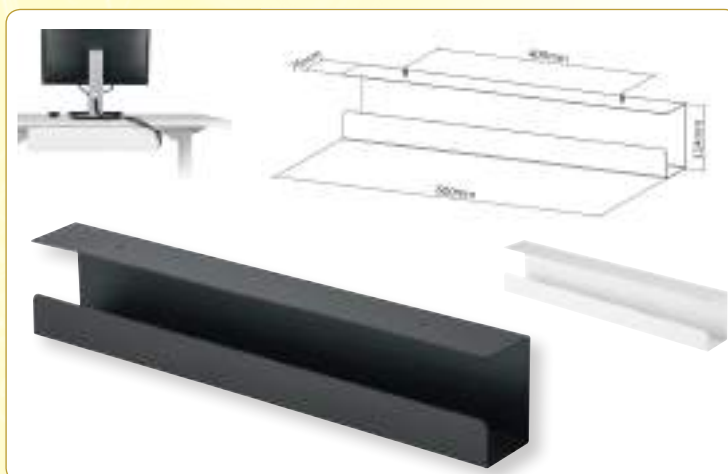

## ROLINE Cable Cover Organizer (Under Desk Mount)

- Contents: 2x cable manager à 530 x 110 x 80 mm

**roline**<sup>®</sup>  
Designed for Professionals

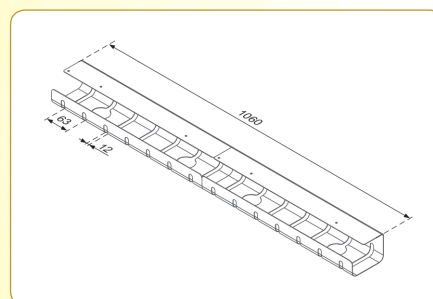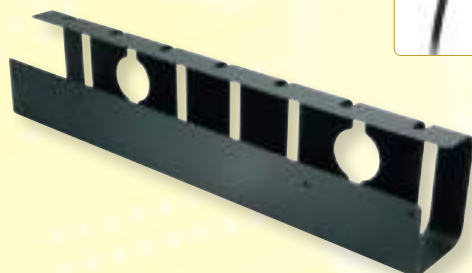

Order-No. – P.U.

ROLINE Cable Cover Organizer, Under Desk Mount (2 pieces), silver


17.03.1302 – 6

ROLINE Cable Cover Organizer, Under Desk Mount (2 pieces), black

17.03.1303 – 6

ROLINE Cable Cover Organizer, Under Desk Mount (2 pieces), white

17.03.1304 – 6

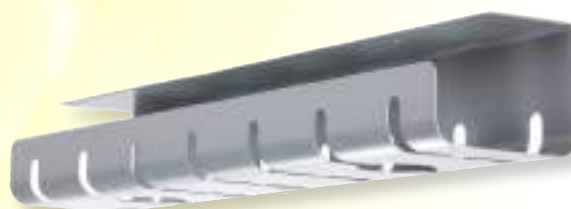

Your Distributor

**roline**<sup>®</sup>  
Designed for Professionals

**roline**<sup>®</sup>  
green

**roline**<sup>®</sup> GOLD

