


FIBER ACCESS TERMINAL BOX ORM 1

The Fiber Access Terminal Box ORM 1 is designed to terminate an optical network using 2 to 4 optical fibers at a customer terminal point. It is installed indoors on a wall.

- Capacity 4 optical connectors
- Connector holder SC simplex or LC duplex
- Maximum capacity is 4 optical splices, heat shrink, RECORD splice, Fiberlock
- Attractive design for indoor usage
- Installing on a surface or flush-mounting box
- Simple optical management
- Direct fiber termination by a connector
- Standard socket dimensions
- Input possibility of fiber with connector
- Use only for fibers G657a, b
- Possibility of pre-assembled fttH socket to minimize installation time at the customer (cable FLAT DROP 2x3.1mm)

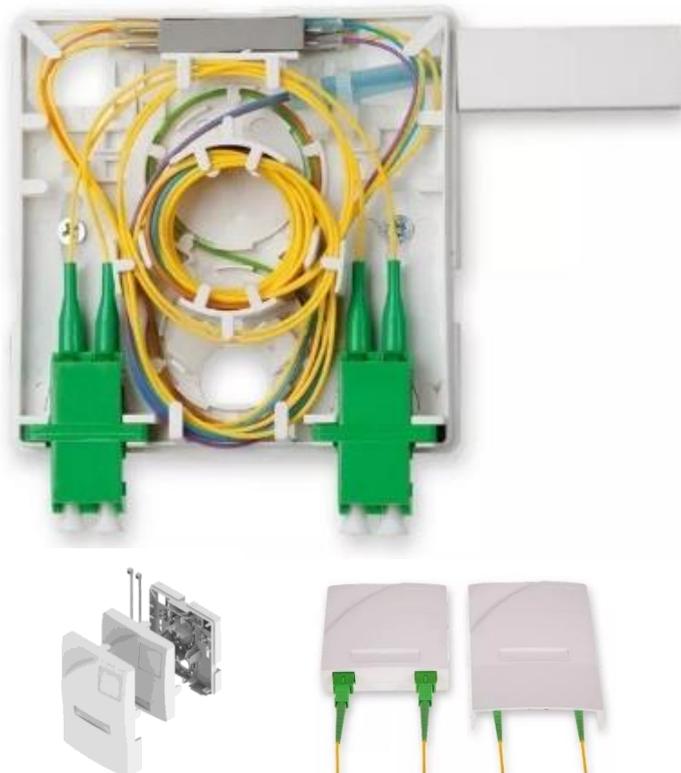

Specifications

Ingress Protection	IP30 / IP54 (under special conditions)
Impact Protection	IK07
Flammability Degree	HB
Material	ABS
Optical wavelength	1310nm
Color	white RAL 9003
Dimensions	(H x W x D) 116 x 81 x 25 mm / extended cover 81 x 81 x 25 mm / short cover
Environment	indoor
Connector Type	SC / LC